





PHASE 3

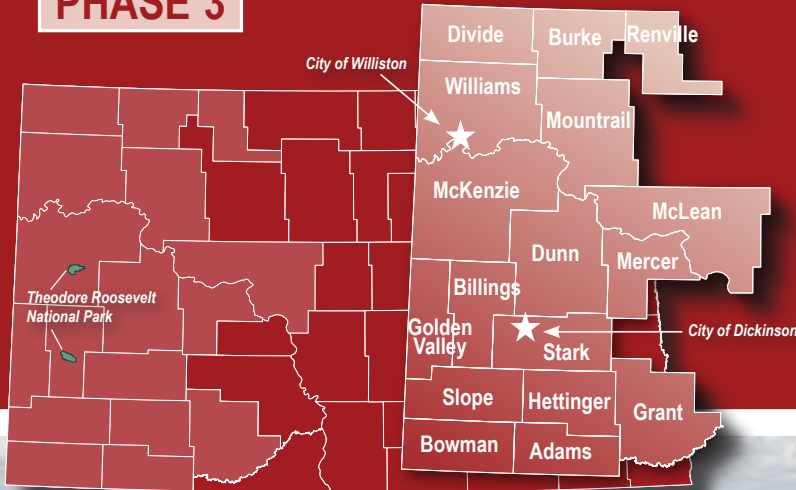

November 2014

**North Dakota
Local Road
Safety Program**

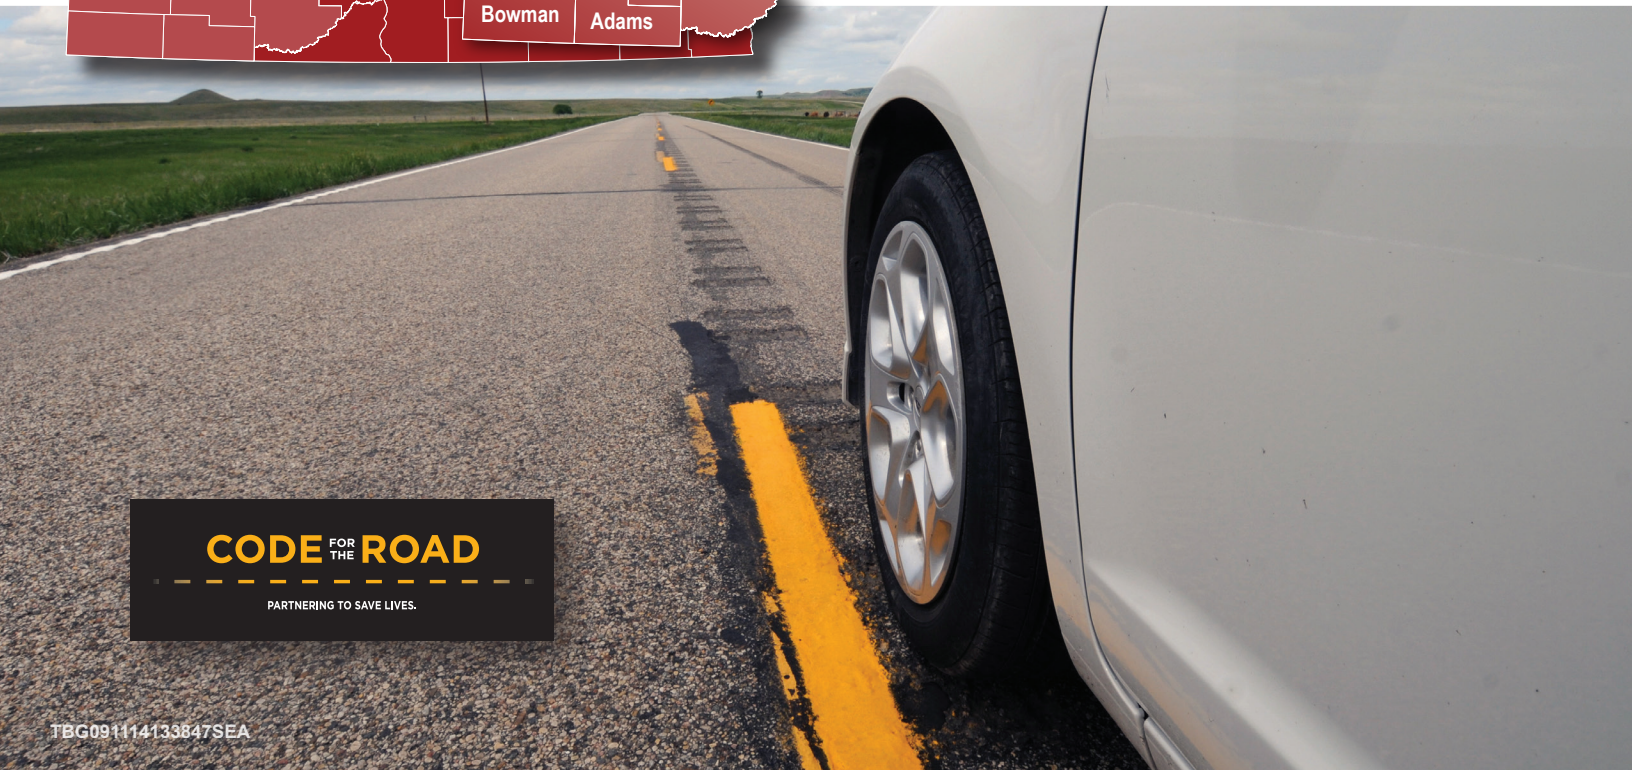

CODE FOR THE ROAD

PARTNERING TO SAVE LIVES.

North Dakota Local Road Safety Program

Prepared by

CH2M HILL

SRF Consulting Group, Inc.

On behalf of

North Dakota Department of Transportation

Grant Levi, P.E., Director

November 2014

23 USC 409
NDDOT Reserves All Objections

Contents

Executive Summary	ES-1
1.0 Introduction	1-1
1.1 Background.....	1-1
1.2 Traffic Safety – A National Perspective	1-2
1.2.1 AASHTO’s <i>Strategic Highway Safety Plan</i> and Safety Emphasis Areas	1-3
1.3 North Dakota’s Statewide Safety Planning Efforts	1-3
1.4 Local Road Safety Program Overview	1-5
2.0 Western Region Safety Emphasis Areas and Crash Overview	2-1
2.1 Western Region Crash Overview	2-1
2.1.1 North Dakota Crash Mapping	2-1
2.1.2 Facilities Analyzed.....	2-1
2.1.3 Crash Data Sets	2-2
2.2 Western Region Safety Emphasis Areas	2-7
2.3 Crash Risk Factors	2-8
2.3.1 Rural Roadway Segments – Crashes on Paved Roads	2-9
2.3.2 Rural Curves – Crashes on Paved Roads in Curves	2-13
2.3.3 Rural Intersections – Crashes at Thru-STOP Intersections	2-16
2.3.4 Urban Roadway Segments – Cities with Populations Greater than 5,000 (Cities of Dickinson and Williston)	2-20
2.3.5 Urban Intersections – Right-Angle Crashes, Cities with Populations Greater than 5,000 (Cities of Dickinson and Williston)	2-23
2.3.6 Urban Intersections – Pedestrian/Bicycle Crashes, Cities with Populations Greater than 5,000 (Cities of Dickinson and Williston)	2-27
2.4 Western Region Risk Summary	2-30
3.0 Western Region Priority Safety Strategies	3-1
3.1 Background.....	3-1
3.2 Initial/Comprehensive List of Potential Strategies.....	3-1
3.3 Safety Strategies Workshop.....	3-14
3.4 Priority Safety Strategies.....	3-14
4.0 Western Region Infrastructure Safety Projects	4-1
4.1 Western Region Proactive Project Decision Process	4-1
Adams County	4-8
Billings County	4-9
Bowman County	4-11
Burke County.....	4-13
Divide County	4-15
Dunn County	4-17
Golden Valley County	4-19
Grant County	4-21
Hettinger County	4-23
McKenzie County	4-25
McLean County	4-27

Mercer County.....	4-29
Mountrail County	4-30
Renville County.....	4-32
Slope County	4-33
Stark County.....	4-34
City of Dickinson	4-36
Williams County	4-38
City of Williston	4-40
Theodore Roosevelt National Park.....	4-42
5.0 Behavioral Safety Strategies	5-1
5.1 Purpose of Driver Behavior Safety Strategies.....	5-1
5.2 Overview of Behavioral Crash Data for Western Region	5-1
5.3 Importance of Traffic Safety Culture Change.....	5-2
5.3.1 The Influence of Traffic Safety Culture.....	5-2
5.3.2 Social Norms Inhibiting a Strong Traffic Safety Culture	5-2
5.3.3 Social Levels Influencing Safety Culture	5-2
5.4 Behavioral Safety Strategies	5-4
5.4.1 Role of Policy, Education, and Enforcement.....	5-4
5.4.2 Effective Use of Public Information Strategies	5-4
5.4.3 LRSP Phase 3 Western Region Priority Strategies.....	5-5
5.4.4 Impaired Driving	5-6
5.4.5 Speeding/Aggressive Driving.....	5-10
5.4.6 Young Drivers	5-15
5.4.7 Unbelted Occupants	5-18
5.4.8 Heavy Truck - Behavioral Strategy.....	5-20
5.5 Traffic Safety Office Supporting Resources	5-22
5.5.1 TSO Grant Program Application Process.....	5-22
5.5.2 Technical Assistance.....	5-22
5.5.3 Traffic Records/Crash Data	5-22
References and Works Cited	5-24

Acronyms and Abbreviations

4Es	education, enforcement, engineering, and emergency medical services
100MVMT	100 million vehicle miles traveled
AASHTO	American Association of State Highway and Transportation Officials
ADT	average daily traffic
CMC	county major collector
CMF	crash modification factor
CRS	Crash Reporting System (North Dakota Department of Transportation)
DUI	driving under the influence
EMS	emergency medical services
ERA	edge risk assessment
FHWA	Federal Highway Administration
GDL	graduated driver's license
GHSA	Governors Highway Safety Association
HSIP	Highway Safety Improvement Program
<i>LEAD</i>	Listen, Educate, Ask, Discuss
LRSP	Local Road Safety Program
MHA	Mandan, Hidatsa, and Arikara
mph	miles per hour
MUTCD	<i>Manual on Uniform Traffic Control Devices</i>
NCHRP	National Cooperative Highway Research Program
NDDOT	North Dakota Department of Transportation
NDSU	North Dakota State University
NHTSA	National Highway Traffic Safety Administration
NIOSH	National Institute for Occupational Safety and Health
Plan	Local Road Safety Program Plan
PSA	public service announcement
SHSP	Strategic Highway Safety Plan
TraCS	Traffic and Criminal Software
TSO	Traffic Safety Office

Executive Summary

This Local Road Safety Program (LRSP) Plan (Plan) was prepared for the 17 counties (Adams, Billings, Bowman, Burke, Divide, Dunn, Golden Valley, Grant, Hettinger, McKenzie, McLean, Mercer, Mountrail, Renville, Slope, Stark, and Williams) and two cities (Dickinson and Williston) in the western region of North Dakota. The Plan also addresses key routes that make up the highway network for Theodore Roosevelt National Park. The LRSP was prepared as part of North Dakota's statewide highway safety planning process. The contents are the result of a data-driven process, with a goal to reduce severe crashes (defined as those crashes resulting in at least one fatality or incapacitating injury) by documenting at-risk locations, identifying effective low-cost safety improvement strategies, and better positioning the western region to compete for available safety funds. The LRSP includes a description of the connection to safety planning efforts at the national, state (through North Dakota's *Strategic Highway Safety Plan* and the Highway Safety Improvement Program), and regional levels.

The LRSP was commissioned by the North Dakota Department of Transportation (NDDOT) to provide a tool to assist counties and cities in submitting proactive low-cost systemic safety projects for the NDDOT to fund as part of the Highway Safety Improvement Program (HSIP). The LRSP is not intended to be a complete safety plan for the western region, because there may be other safety improvement strategies that are considered high-cost or low-cost that are also effective, but cannot be systematically applied across a county or local road system. While this Plan addresses many of the safety concerns at high-risk locations within the region, other equally important projects may be identified after this safety planning effort is complete.

Specifically, this Plan includes the following:

- Description of the safety emphasis areas.
- Identification of a short list of high-priority, low-cost safety strategies.
- Documentation of at-risk locations along the county/local road systems that are considered candidates for safety investment. At-risk locations include roadway segments, horizontal curves, and intersections with multiple severe crashes or with roadway geometry and traffic characteristics similar to other locations in North Dakota where severe crashes have occurred.
- Development of approximately \$16.2 million of suggested safety projects across the western region (Table ES-1), including the completed forms suitable for submittal to the NDDOT for their consideration for HSIP funding. These projects represent the application of high-priority safety strategies at the at-risk locations.
- Discussion of behavioral crash statistics, potential safety strategies, and current statewide resources available for implementation of behavioral safety strategies.

TABLE ES-1
Western Region Total Safety Project Costs

Rural Projects	Roadway Segments	Intersections	Curves	Total
Adams County	\$69,471	\$84,960	\$65,733	\$220,164
Billings County	\$54,332	\$84,360	\$90,438	\$229,130
Bowman County	\$77,652	\$148,560	\$181,957	\$408,169
Burke County	\$33,488	\$94,200	\$18,651	\$146,339
Divide County	\$82,719	\$142,200	\$16,355	\$241,274
Dunn County	\$89,973	\$330,360	\$42,660	\$462,993
Golden Valley County	\$36,060	\$27,720	\$21,240	\$85,020
Grant County	\$0	\$75,240	\$96,480	\$171,720
Hettinger County	\$82,345	\$59,520	\$18,752	\$160,616
McKenzie County	\$187,125	\$647,760	\$111,235	\$946,120
McLean County	\$140,181	\$3,485,940	\$49,221	\$3,675,343
Mercer County	\$366,048	\$300,720	\$119,618	\$786,386
Mountrail County	\$51,084	\$2,679,780	\$24,141	\$2,755,005
Renville County	\$163,800	\$65,880	\$137,187	\$366,867
Slope County	\$7,605	\$31,200	\$22,107	\$60,912
Stark County	\$504,203	\$375,180	\$57,701	\$937,085
Williams County	\$316,395	\$1,626,780	\$205,197	\$2,148,372
Theodore Roosevelt National Park	\$125,700	\$13,320	\$0	\$139,020
Urban Projects	Roadway Segments	Intersections – Right-Angle	Intersections – Pedestrians and Bicyclists	Total
Dickinson	\$632,667	\$8,400	\$558,000	\$1,199,067
Williston	\$596,160	\$6,000	\$438,600	\$1,040,760

The data-driven analytical process that identified lane departure crashes along roadway segments and curves, and right angle and pedestrian/bicycle involved crashes at intersections as safety emphasis areas also identified crashes involving heavy vehicles as a priority in the western region. Statewide, severe crashes involving heavy vehicles accounts for 18 percent of all severe crashes, but over 30 percent of severe crashes in the western region involve heavy vehicles. In addition, 67 percent of all severe heavy vehicle crashes in North Dakota occur in the western region. As a result, addressing heavy vehicle-related crashes is considered a priority in the western region. Further analysis of these crashes determined that more than 80 percent of the heavy vehicle crashes occur on the state highway system. This fact combined with the NDDOT's greater access to financial resources has caused the NDDOT to take the responsibility for analyzing the details about heavy vehicle crashes and take the lead in identifying candidate

locations and then developing and implementing truck related safety projects. Additionally, the predominant crash types for severe heavy vehicle crashes in western North Dakota can be reduced by the suggested systemic projects for county roads and city streets.

The information in this Plan is consistent with best practices in safety planning as presented in guidance prepared by the Federal Highway Administration (FHWA), the American Association of State Highway and Transportation Officials (AASHTO), and the National Cooperative Highway Research Program (NCHRP). This information is provided to the highway agencies in the western region in an effort to reduce the number of severe crashes on the county/local road systems. It is understood that the final decision to implement any of the suggested projects resides with the respective county or city officials.

The rankings of county/local roadway facilities are based on a comparison with documented risk factors. There is no expectation or requirement that the highway agencies of the western region pursue safety projects in the exact ranking order. The ranking suggests a general priority, and it is understood that actual project development decisions will be made by county or city staff based on consideration of economic, social, and political issues, as well as in coordination with other projects already in each agency's Capital Improvement Program.

It should also be noted that some of the at-risk locations and suggested safety projects involve the intersection of a county roadway and a state route. It is acknowledged that the county does not have the authority to implement projects on the state's right-of-way. The county is encouraged to coordinate with the NDDOT to pursue a partnership that identifies a path toward implementation. This LRSP: (1) does **not** set requirements or mandates; (2) is **not** a standard; and (3) is neither intended to be nor does it establish a legal standard of care.

To help reduce the potential exposure to claims of negligence associated with motor vehicle crashes on the county/local road system, the following key point should be considered:

- Federal law (23 USC Section 409) established that information generated as part of the statewide safety planning process is considered privileged and unavailable to the public. The privileged status includes crash data where value/detail has been added by analysts during the safety planning process (for example, computation of crash rates, disaggregation of crashes by type or severity, and documentation of contributing factors), the lists of at-risk locations, and information supporting the development and evaluation of potential safety projects. The federal law and the privileged status of the safety information was upheld by the U.S. Supreme Court in the case of *Pierce County (Washington) v. Guillen* (see Appendix: Risk Management). North Dakota interprets Section 409 to mean that basic crash data are available to the public on request, but that the data cannot be used in legal proceedings associated with claims of negligence.

As with any transportation plan, the expected life of this document is limited. This is because the distribution of crashes can change over time, just as roadway and traffic conditions change, which may contribute to the occurrence of crashes. This Plan contains \$16 million of potential safety projects, which could provide the western region with a sufficient backlog of projects for up to 5 years. As a result, the counties and cities are encouraged to periodically update this Plan.

The counties and cities are encouraged to apply for these projects through the NDDOT's HSIP process. The anticipated annual HSIP process is shown in Table ES-2.

TABLE ES-2
HSIP Solicitation Schedule

Month	Task Description
October/November	Solicitation for HSIP is sent out to all counties, districts, metropolitan planning organizations (MPOs), cities, and tribes. The counties, districts, MPOs, cities, and tribes will have about 6 weeks to respond .
January through March	NDDOT reviews the requests and conducts additional studies if required.
Following Fall	HSIP approval notices are sent after program concurrence from the FHWA. Funding for an approved project will be provided as funding is available.

1.0 Introduction

1.1 Background

To fulfill a commitment in the 2013 North Dakota *Strategic Highway Safety Plan* (SHSP), the North Dakota Department of Transportation (NDDOT) began the Local Road Safety Program (LRSP). The purpose of the LRSP is to better engage local roadway agencies in the statewide safety planning process. The NDDOT’s commitment is based on two pieces of information:

- Based on 2007-to-2011 crash records, the SHSP identified that 56 percent of severe crashes (those crashes resulting in at least one fatality or incapacitating injury) in North Dakota occurred on roads operated by local agencies. (Note: More recent crash data from 2009 to 2013 indicates that 44 percent of severe crashes were on local agency roads.)
- The NDDOT had historically focused federal safety funds on interstates, U.S. highways, and state highways, even though only slightly more than half of severe crashes occurred on those facilities.

The NDDOT set out to increase the level of participation of local agencies in safety planning and the amount of safety funds directed toward projects on local systems. To do this, the NDDOT first partnered with local agencies (including all 53 counties and 12 major cities in the state) to prepare safety plans for every region of North Dakota.

Representatives from the NDDOT, Adams, Billings, Bowman, Burke, Divide, Dunn, Golden Valley, Grant, Hettinger, McKenzie, McLean, Mercer, Mountrail, Renville, Slope, Stark, and Williams counties; Theodore Roosevelt National Park; and the cities of Dickinson and Williston participated in developing this LRSP Plan (Plan) as Phase 3 of a comprehensive effort to reduce the number of fatal and incapacitating injury crashes (referred collectively as severe crashes) that occur on North Dakota’s local road system in the western region. The area covered by the Plan includes portions of NDDOT District 1 – Bismarck, District 4 – Minot, District 5 – Dickinson, and District 7 – Williston (Figure 1-1).

The purpose of this Plan is to identify and implement specific safety strategies at specific locations and to link these projects directly with the contributing factors associated with the majority of severe crashes on the local roads. These safety projects are intended to be comprehensive by addressing both infrastructure- and driver-behavior-related crashes with proactive projects developed through a system-wide risk assessment process. These projects are intended to compliment reactive projects developed through a site analysis approach focused on high-crash locations.

The Strategic Highway Safety Plan (SHSP) development process was key in helping us identify the importance of local roads to achieve our long-term safety goals. This data-driven process helped us to transition to a systemic identification of crash types on all roads in addition to our traditional crash location (or hot spot) approach on the state system. As a result, the NDDOT has partnered with local stakeholder to prepare road safety plans that will identify potential safety projects consistent with the SHSP.

— Grant Levi, P.E., Director
North Dakota Department of Transportation

The traffic safety priorities identified in this Plan are the result of a data-driven analysis of nearly 90,980 crashes (including 2,472 severe crashes) on all roads in North Dakota. Of these crashes, 19,368 total crashes and 901 severe crashes occurred in the western region over the 5-year period from 2009 to 2013.

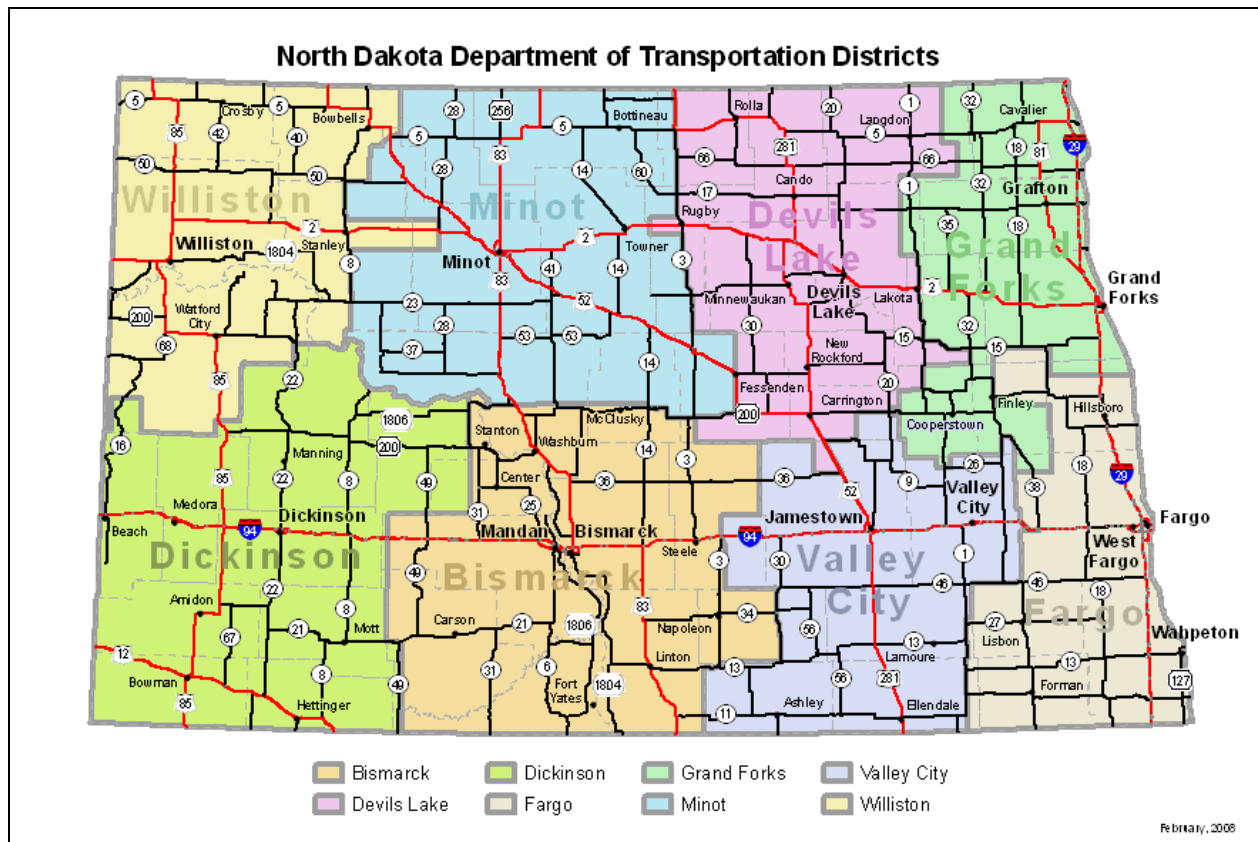


FIGURE 1-1
North Dakota Department of Transportation's Eight Districts

1.2 Traffic Safety – A National Perspective

According to the National Highway Traffic Safety Administration (NHTSA), 33,561 people were killed in traffic crashes in 2012 – an average of 92 people killed every day – and an additional 2.4 million people were injured. Nationally, the number of fatalities decreased significantly and steadily in the 1970s and 1980s. Beginning in the early 1990s and continuing through the early 2000s, traffic fatalities began to increase. However, since 2005, traffic fatalities in the U.S. have decreased dramatically to the lowest number of fatalities in recent history – 32,479 fatalities in 2011 and 33,561 in 2012.

Like the national trend, the North Dakota traffic fatality rate also decreased in the 1970s and 1980s. Likewise, North Dakota's traffic fatalities slowly increased through the 1990s and early 2000s, and began to decrease again in 2005. However, unlike the national trend, North Dakota's traffic fatality rate has increased since 2008. The 2013 North Dakota Strategic Highway Safety Plan recognizes the following issues likely account for much of the increase:

- Shifts in the age of the driving population.

- Steady increase in the number of vehicle miles traveled in North Dakota, which is counter to the flat or decreasing national trend in travel.
- Other states have a longer history using a systemic investment approach to focus on locations with risk factors for severe crashes.
- The growing challenges of providing emergency medical response and quick access to advanced health care in rural areas.

1.2.1 AASHTO's *Strategic Highway Safety Plan* and Safety Emphasis Areas

In the late 1990s, the American Association of State Highway and Transportation Officials (AASHTO) and the Federal Highway Administration (FHWA) supported a comprehensive and data-driven approach to reduce the number of traffic-related fatalities. Both AASHTO and the FHWA concluded that up to that point, states' efforts had not been effective in lowering the number of serious crashes because: (1) efforts were not focused on serious crashes nor the primary factors resulting in severe crashes; and (2) safety project selection was not part of a data-driven process that implemented effective strategies at locations most at risk for the occurrence of a severe crash.

AASHTO and the FHWA recommended a safety program development process that included 22 categories (or safety emphasis areas) in the areas of drivers, special users, vehicles, highways, emergency services, and management. The objective of this first step is to help agencies consider the 4Es of safety – engineering, education, enforcement, and emergency medical services (EMS) – when identifying safety priorities for their roads. In addition, selecting safety emphasis areas focuses agencies on safety strategies linked to the issue.

In 2007, AASHTO set a goal to reduce the number of traffic fatalities nationally by 1,000 each year for the next 20 years, which is an integral first step in a national *Toward Zero Deaths* safety vision. The FHWA has determined that this goal will be reached only by partnering with individual states. This partnering will lead to more successful project implementation and will result in programs that target the factors contributing to the greatest number of fatal and incapacitating injury crashes.

1.3 North Dakota's Statewide Safety Planning Efforts

In 2004, North Dakota had a fatality rate of 1.34 fatalities per 100 million vehicle miles traveled (100MVMT) that was less than the national average (1.44 fatalities per 100MVMT). However, in recent years, the North Dakota fatality rate (1.47 fatalities per 100MVMT in 2013) has risen to above the national average (1.11 fatalities per 100MVMT) and the overall number of traffic fatalities have gradually increased (see Figure 1-2). In 2012, there were 170 fatalities on North Dakota roads; the most traffic fatalities reported in the state since 1982. In 2013, the number of North Dakota traffic fatalities decreased to 148, the same number as in 2011.

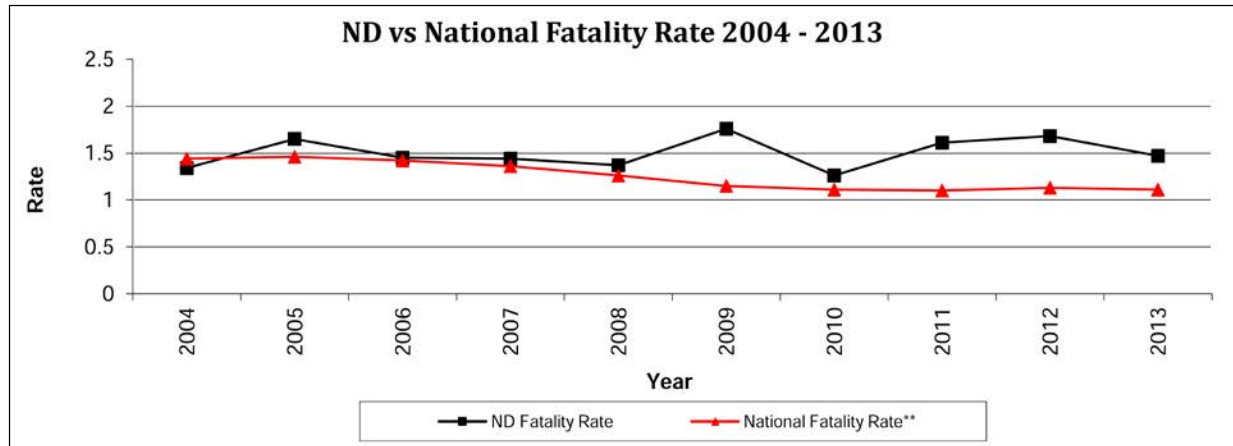


FIGURE 1-2
Fatality Rate – National and North Dakota (2004 to 2013)

In 2013, the NDDOT updated the state’s SHSP. Based on severe crashes (Table 1-1), the 2013 SHSP identified the following safety emphasis areas, as well as priority safety strategies in each area:

- Young drivers (under age 21)
- Speeding or aggressive driving
- Alcohol-related
- Unbelted vehicle occupants
- Lane departure
- Intersections

North Dakota also adopted a long-term vision of zero fatalities on its roadways. Achieving this vision will require many years and dramatic shifts in the safety culture for North Dakota residents. An aggressive intermediate goal was set to reduce the 3-year average of traffic fatalities to 100 or fewer by 2020.

TABLE 1-1
North Dakota Fatal and Severe Injury Crashes by AASHTO Safety Emphasis Area

Safety Emphasis Area		Statewide Crashes (All Roads)	
		Percent	Number
Drivers	Involving Drivers Under Age 21	22%	501
	Involving Drivers Over Age 64	13%	280
	Speeding or Aggressive Driving	26%	576
	Alcohol-Related	30%	667
	Distracted, Asleep, or Fatigued Drivers	9%	206
	Unbelted Vehicle Occupants	48%	1,067
Special Users	Pedestrians	5%	117
	Bicycle	2%	46
Vehicles	Motorcycles	12%	265
	Heavy Vehicle	15%	342
Highways	Train-Vehicle Collisions	1%	13
	Lane-Departure Including both lane-departure (898 severe crashes) and head-on/ sideswipe-opposing crashes (150 severe crashes)	47%	1,048
	Intersections	23%	513
	Work Zone	2%	36
Total Severe (Fatal and Incapacitating Injury) Crashes		2,231	
Notes:			
Information is from the 2008-to-2012 North Dakota crash data records, which is an update to the information in the 2013 North Dakota SHSP that used 2007-to-2011 crash records.			
Numbers in this table do not add up to the statewide crash numbers because one crash may be categorized into multiple emphasis areas. For example, one crash may involve a young driver at an intersection and, therefore, be included in both of these emphasis areas.			

1.4 Local Road Safety Program Overview

North Dakota’s local road system encompasses more than 97,500 miles of roadway, out of approximately 106,000 miles statewide. Although, historically, more than 50 percent of severe crashes in North Dakota occurred on local roads, the density of these crashes was very low (approximately 0.002 severe crash per mile per year). As a result, local agencies were unable to identify high-crash locations to nominate for funding through the Highway Safety Improvement Program (HSIP). Therefore, using stand-in data for the severe crashes, safety projects were identified using a systemic process to evaluate at-risk locations. The use of the systemic process was necessary due to the low crash density. Based on revised FHWA policy, the NDDOT expanded the HSIP to include projects identified through the systemic analysis of local roads.

The focus areas of the systemic risk assessment are rural, paved county¹ and National Park highways, and urban arterials and collectors in North Dakota's larger cities (cities with a population greater than 5,000). Paved, rural county highways were selected based on an analysis of statewide crash data that indicated that approximately 55 percent of severe local road crashes occurred on rural county roads. Of these crashes, approximately 40 percent occurred on paved roads, which account for less than 10 percent of county roads (approximately 6,200 miles). Further analysis indicated that on these rural highways, the most at-risk elements were roadway segments (76 percent of severe crashes), horizontal curves (31 percent of severe crashes), and intersections (18 percent of severe crashes).

Major cities were selected as a focus because approximately 90 percent of the severe local-road crashes occurred within the city boundaries of the 12 cities in this category. Furthermore, 56 percent of the severe crashes occurred on urban arterials and collectors. In addition, because these 12 cities are responsible for operation and maintenance of U.S. highway and state highway routes within the municipal limits (not including fully access-managed facilities, such as freeways), the U.S. and state highways were included in the review.

Figure 1-3 shows the approach used to develop this Plan for the western counties. The process began with the crash analysis and concluded with this Plan, the culmination of the NDDOT and concerned local agencies working together for nearly half a year.



FIGURE 1-3
Local Road Safety Program Safety Plan Approach

¹ Does not include all paved roads outside municipal limits, but focuses on routes that serve regional travel. For example, a loop road that is paved and yet only provides access to a residential neighborhood was considered to be a local road given the type of traffic served by the facility.

2.0 Western Region Safety Emphasis Areas and Crash Overview

The first step in the process to prepare this Plan for the western region was to conduct a crash analysis overview statewide for North Dakota and then for the western region as a whole.

2.1 Western Region Crash Overview

2.1.1 North Dakota Crash Mapping

Crash data was taken from the NDDOT Crash Reporting System (CRS) and placed into ArcGIS for data exportation based on specific locations relative to local roads. The most recent 5-year period of crash data (from 2009 to 2013) was analyzed and used to determine risk factors specific to the local roads in the western region, which includes Adams, Billings, Bowman, Burke, Divide, Dunn, Golden Valley, Grant, Hettinger, McKenzie, McLean, Mercer, Mountrail, Renville, Slope, Stark, and Williams counties; Theodore Roosevelt National Park; and the cities of Dickinson and Williston. Consistent with the NDDOT's SHSP, the analysis focused on severe (fatal and incapacitating injury) crashes.

2.1.2 Facilities Analyzed

The crash analysis was separated into three main facility types: roadway segments, curves, and intersections:

- Paved rural local roadway segments and local county major collector (CMC) gravel roads were analyzed for multiple crash locations. Other local gravel roads were removed from the analysis because of the relatively low percentage of severe crashes and due to the lack of infrastructure-based strategies that can be applied to this roadway type.
- Local rural road intersections with state highways or other local roads were included in the analysis. Local non-CMC gravel roads intersecting with other local roads were removed from the analysis due to the very low number of crashes at these intersections.
- Horizontal curves on paved rural local roads were included in the analysis.
- Urban roadway segments and intersections were analyzed in the cities of Dickinson and Williston. The following urban roadway types within the city limits were analyzed:
 - State routes
 - Urban principal arterials
 - Urban minor arterials
 - Urban collector roads
- All other local roadway segments and intersections, including gravel roads, were reviewed for locations with multiple severe crashes or "hot spots."

2.1.3 Crash Data Sets

Crash data for the 5 years from 2009 to 2013 was used for the western region crash analysis. In safety analysis, it is recommended that more than 1 year of data be studied to reduce the possibility of examining an unusual year. It is also important to include as many years as necessary to produce a data set that will provide statistically reliable results but not too long so that changed conditions are a concern (for example, reconstructed roads, addition of STOP signs, and changed speed limits). For the western region, there were not enough crashes to be statistically reliable; therefore, decisions also considered crashes for all Phase 1, 2, and 3 cities and counties combined, statewide data (Figure 2-2), or national research.

The western region data set includes 8,686 crashes on local roads; of these, 336 were fatal or incapacitating injury crashes. Disaggregating the severe crashes by road type (paved, gravel, or local), area (urban versus rural), and crash type category (intersection versus roadway segment crashes) resulted in the distribution shown in Table 2-1, Figure 2-1, and Figure 2-2.

TABLE 2-1
 Severe Crash Distribution (2009 to 2013)

Location	Western Region (Percent/Number)	Statewide (Percent/Number)
Rural Roads	69% (232 crashes)	55% (594 crashes)
<i>Paved Rural Roads</i>	36% <i>(83 crashes)</i>	40% <i>(237 crashes)</i>
<i>CMC Gravel Roads</i>	14% <i>(33 crashes)</i>	12% <i>(71 crashes)</i>
Paved Rural Road Segments	78% (64 crashes)	76% (173 crashes)
<i>Single Vehicle, Lane-Departure Crashes on Paved Rural Road Segments</i>	81% <i>(52 crashes)</i>	83% <i>(143 crashes)</i>
Paved Rural Road Intersections	18% (15 crashes)	20% (46 crashes)
<i>Paved Rural Road Thru-STOP Intersections</i>	40% <i>(6 crashes)</i>	50% <i>(23 crashes)</i>

This review shows that, on the local system, severe lane-departure crashes on paved roads and angle crashes at Thru-STOP intersections were overrepresented. Based on statewide traffic safety data, severe lane-departure crashes along curves are also overrepresented.

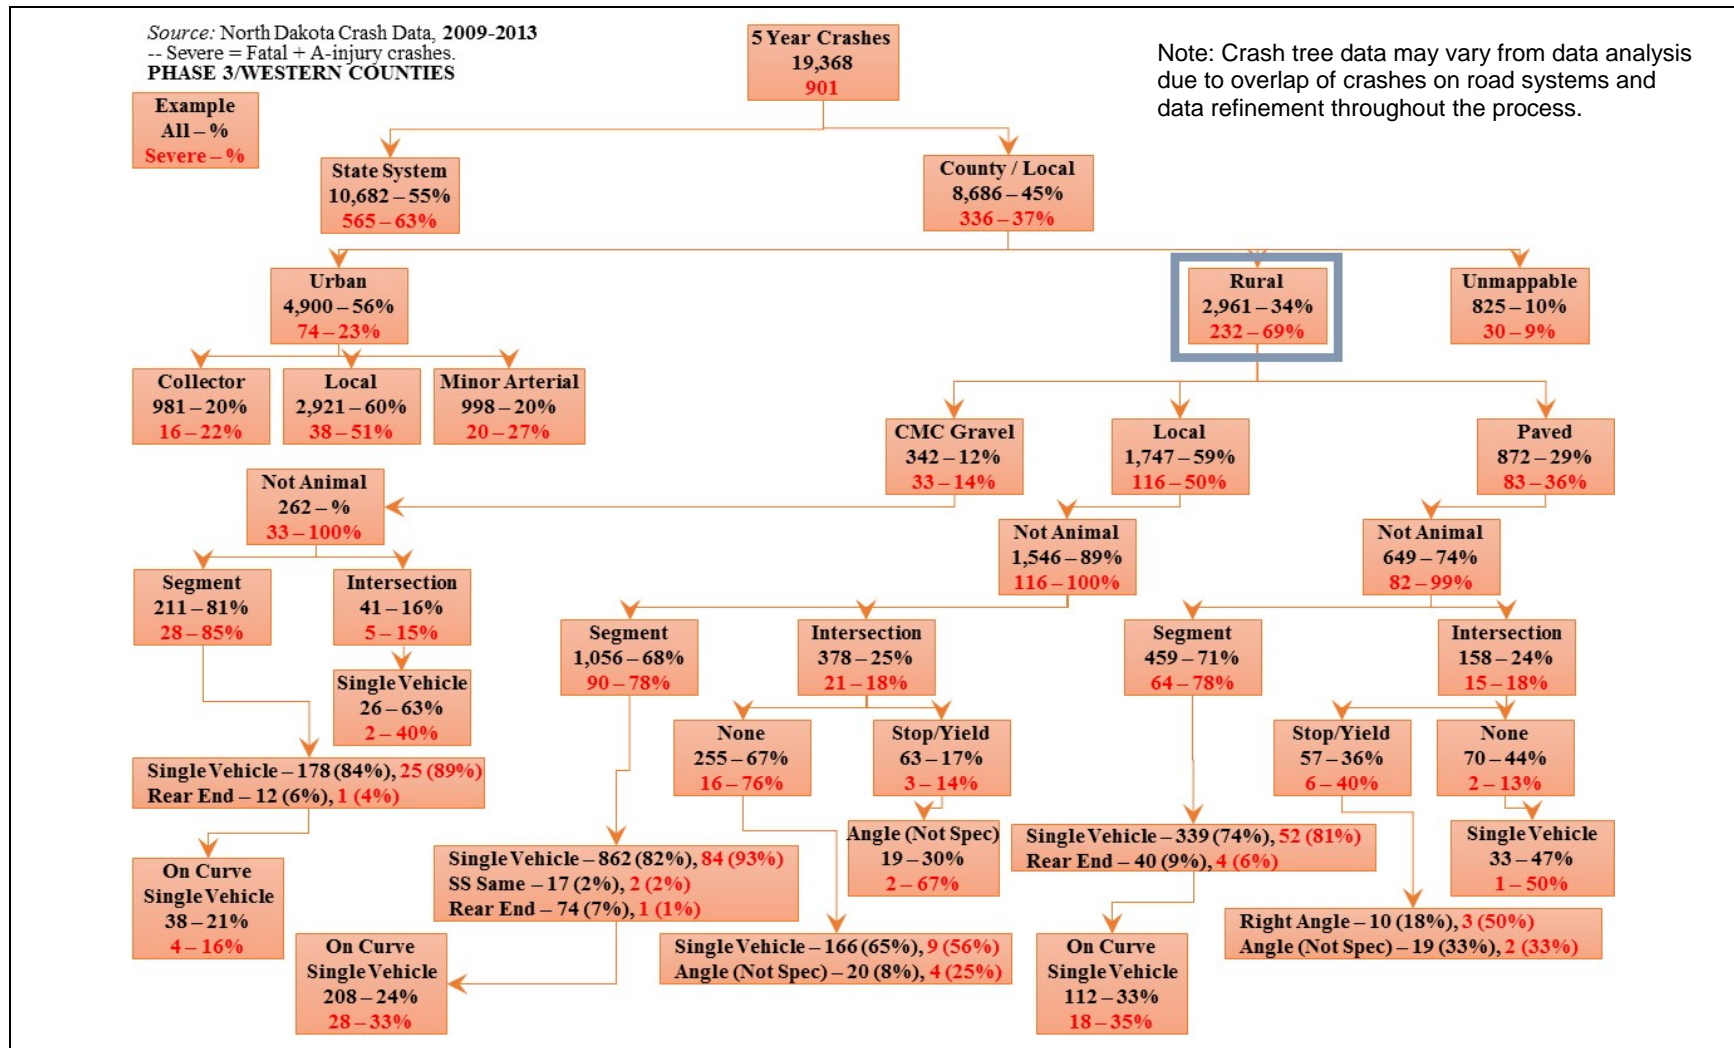


FIGURE 2-1
 Western Region Crash Data Overview – Rural and Urban Local Road Systems (2009 to 2013)

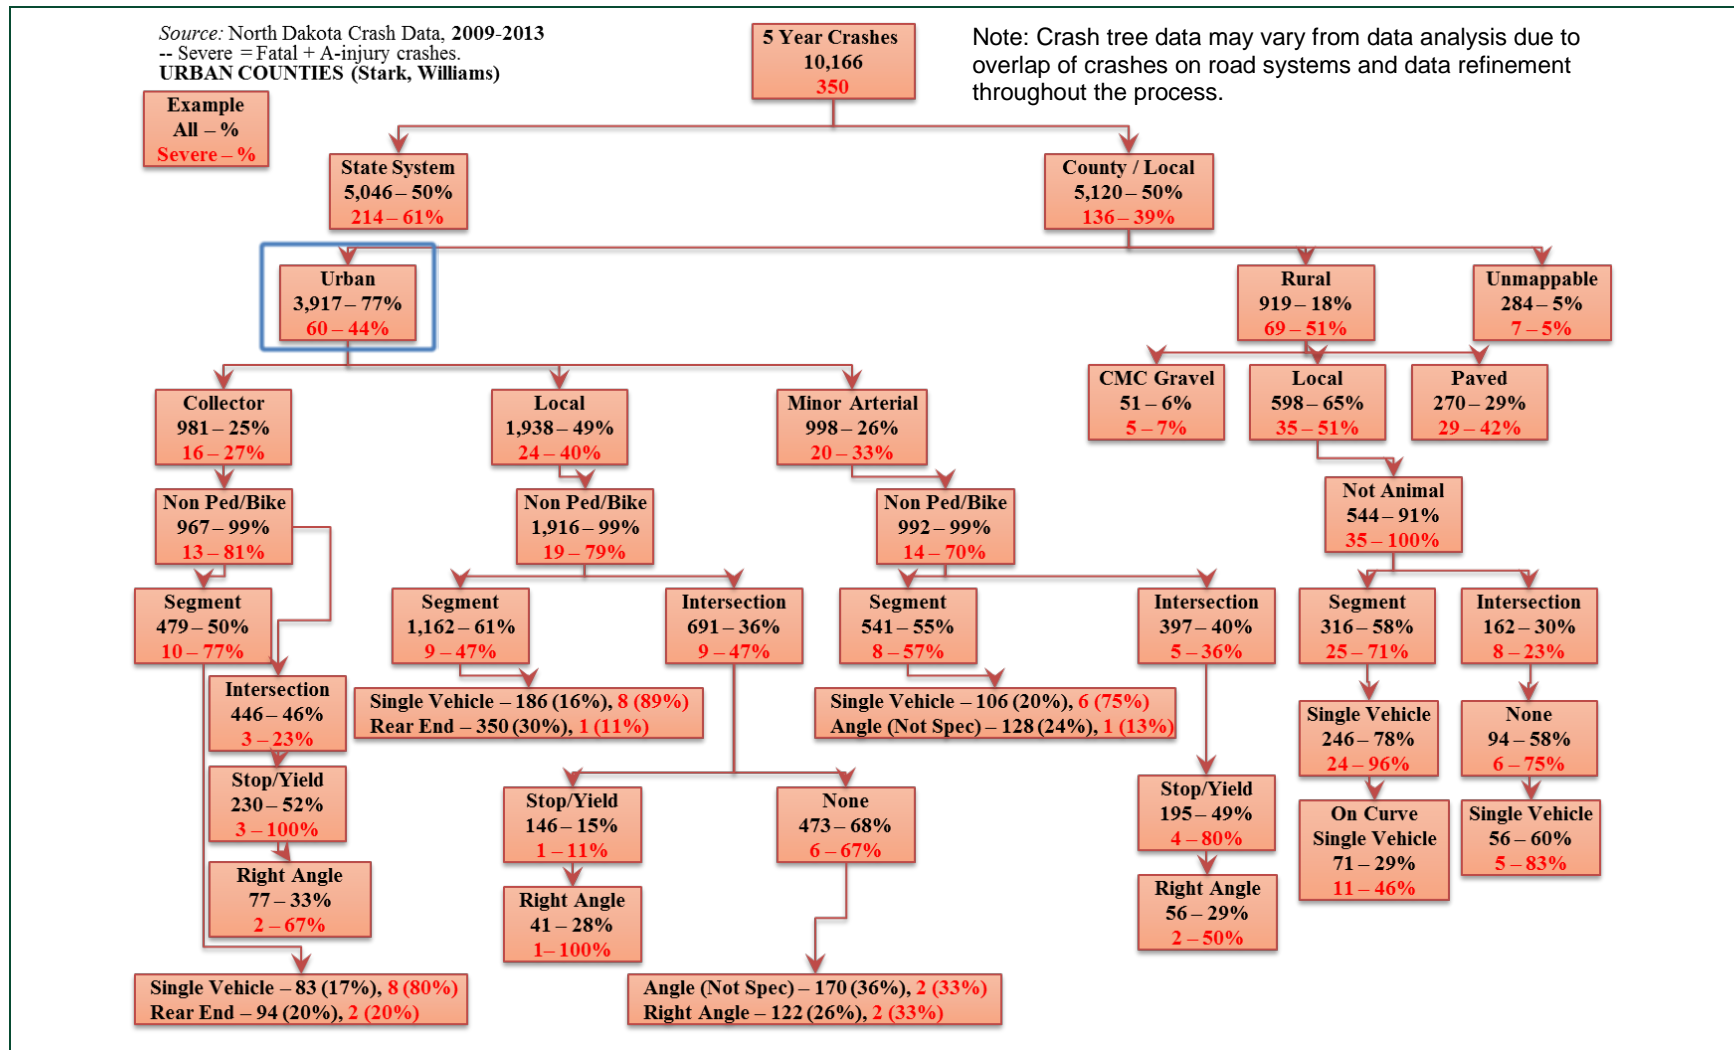


FIGURE 2-1 (Continued)
 Stark County/City of Dickinson and Williams County/City of Williston Crash Data Overview – Rural and Urban Local Road Systems (2009 to 2013)

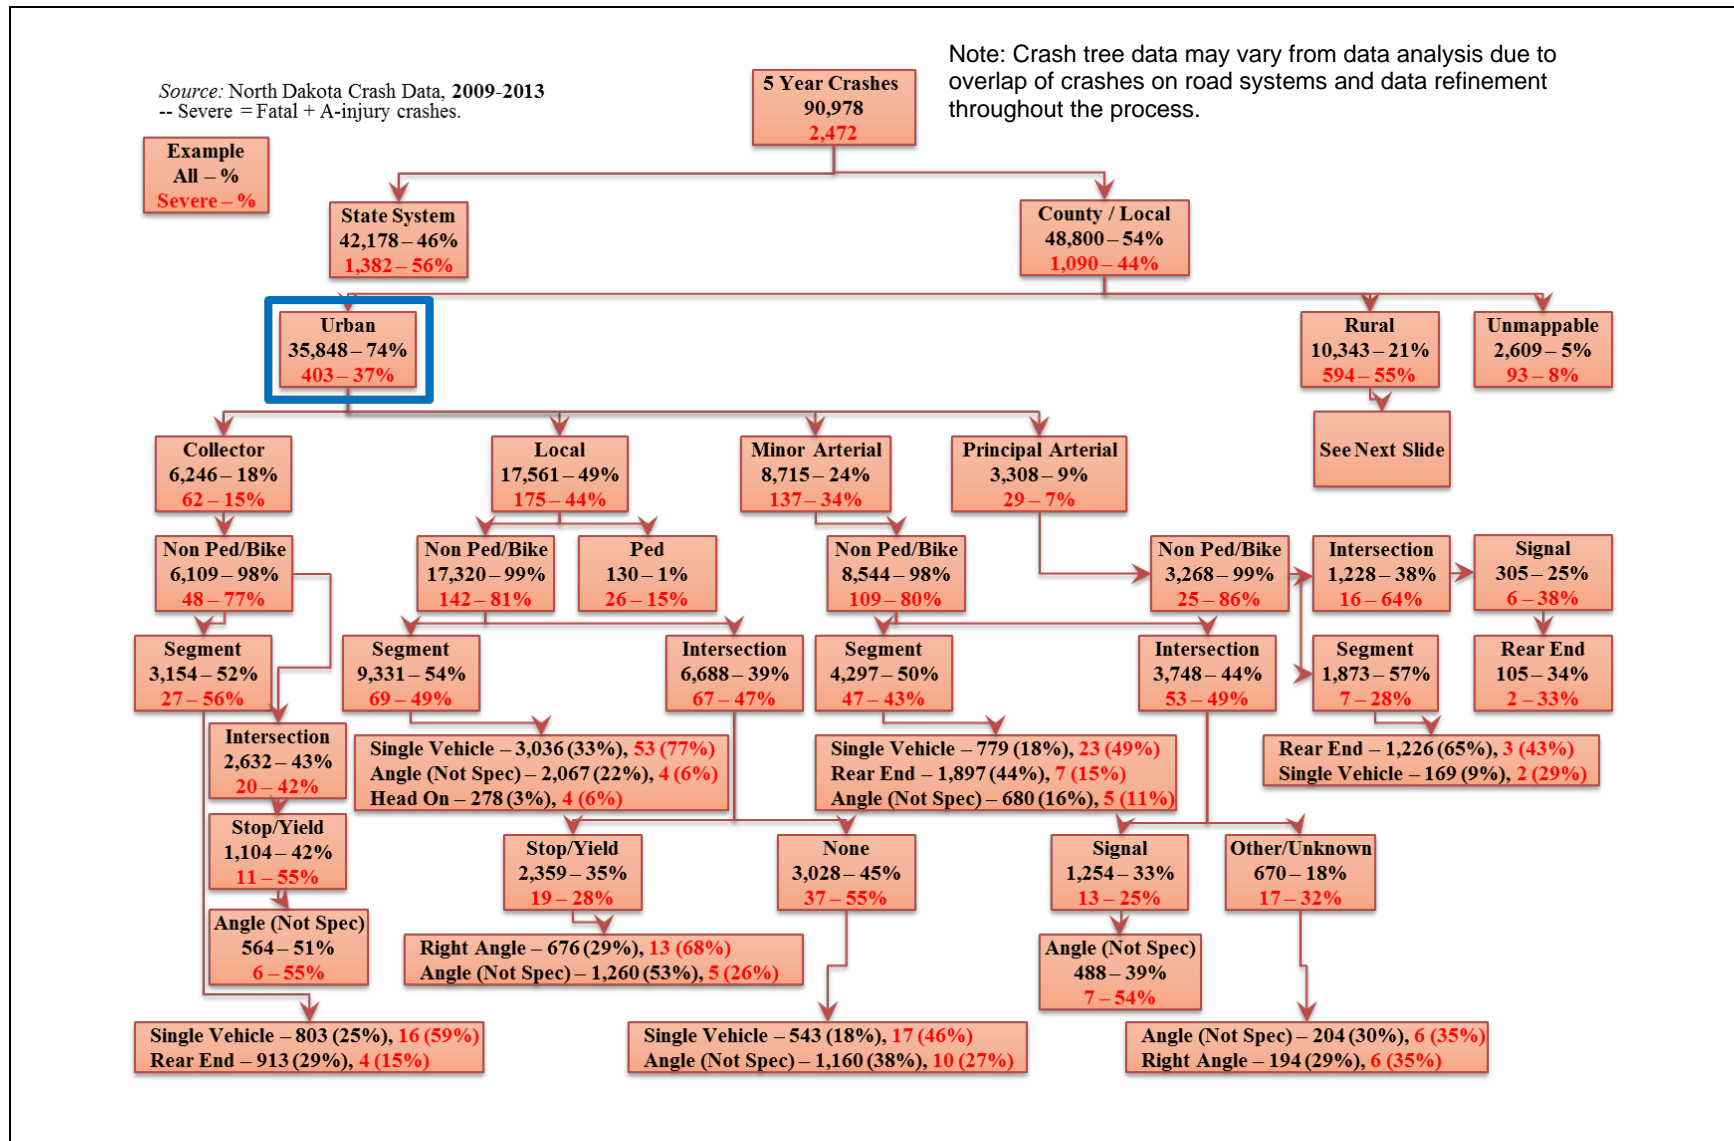


FIGURE 2-2
 North Dakota Crash Data Overview – Rural and Urban Local Road Systems (2009 to 2013)

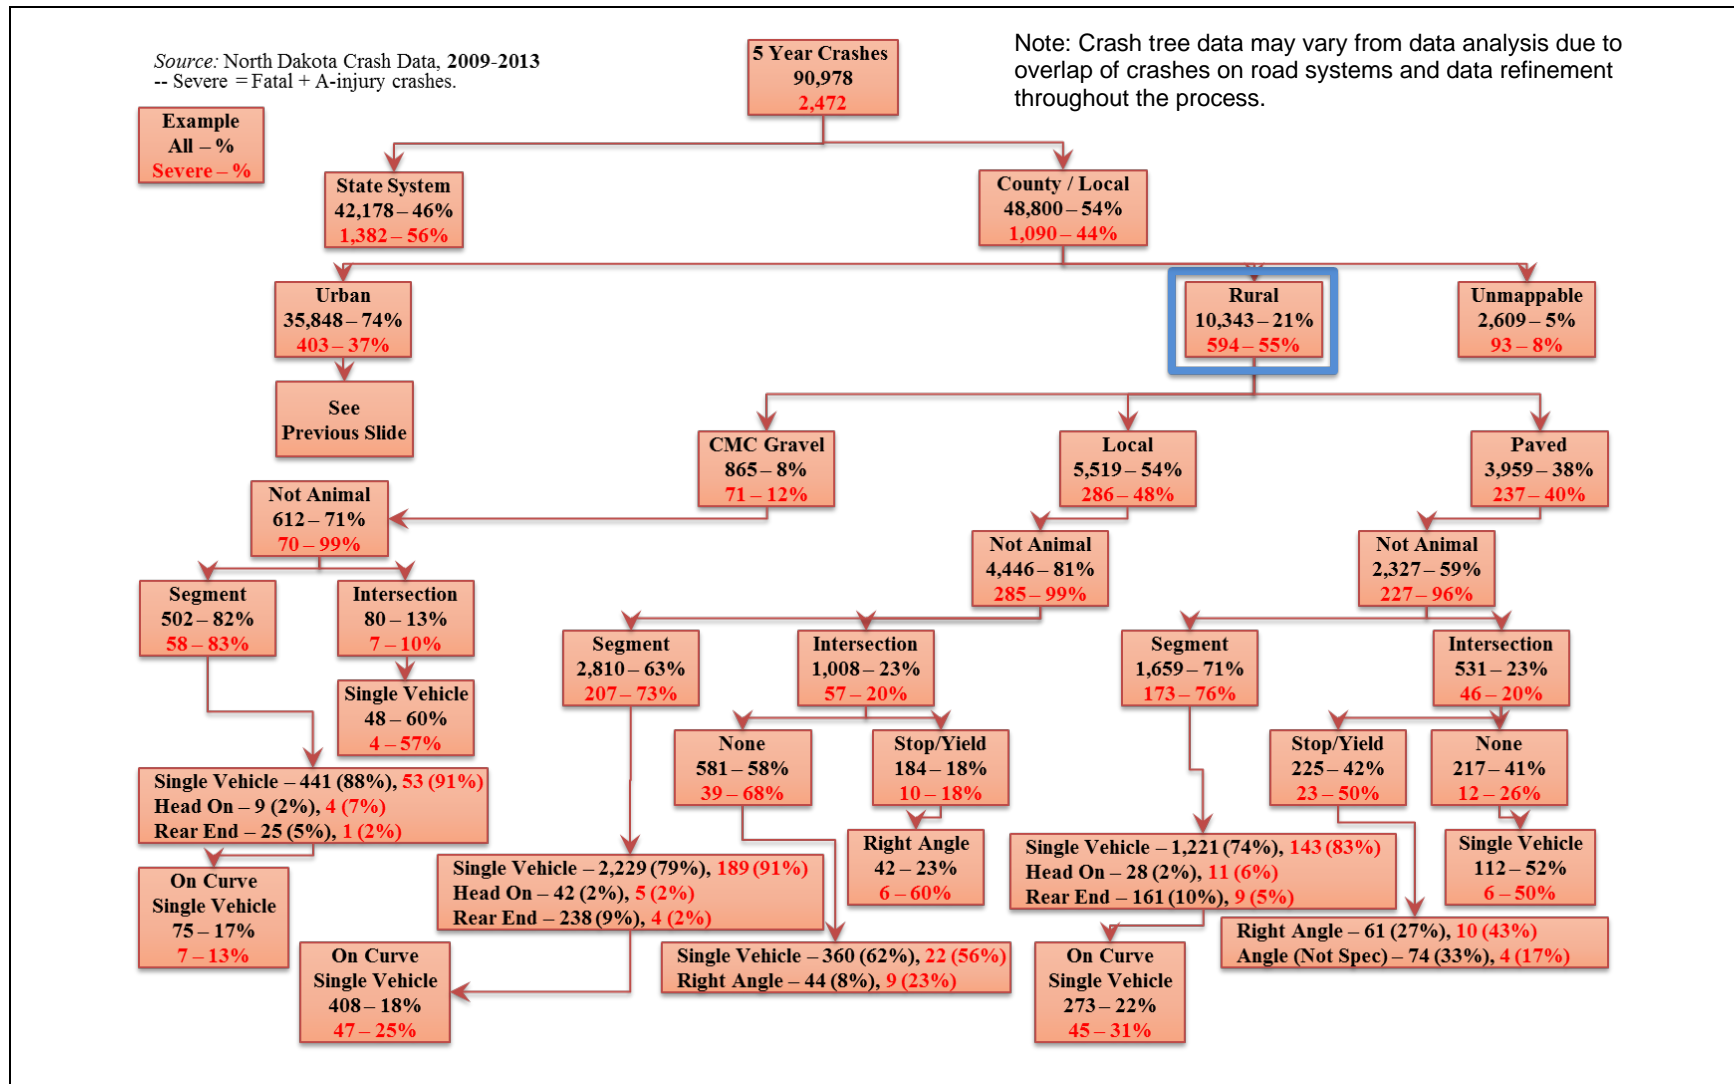


FIGURE 2-2 (Continued)
 North Dakota Crash Data Overview – Rural and Urban Local Road Systems (2009 to 2013)

2.2 Western Region Safety Emphasis Areas

The total number of severe crashes (those crashes resulting in a fatality or incapacitating injury) in each county over the 5-year period from 2009 to 2013 was so few that the crash data was analyzed at regional, statewide, and national levels for various risk factors.

Section 1.2 described the development of AASHTO’s emphasis areas, and how this process was applied to the State of North Dakota to identify statewide safety emphasis areas (Table 1-1). An identical process was followed for the western region, resulting in the distribution of severe crashes among AASHTO’s 22 emphasis areas (Table 2-2). The safety emphasis areas for the western region are consistent with the state’s emphasis areas. This process revealed where crashes were overrepresented based on a comparison to statewide averages or where a large enough number of crashes represented an opportunity to substantially reduce crashes. As a result, the following safety emphasis areas were identified as priorities for safety investments:

- Driver Behavior – Young drivers, aggressive drivers, alcohol-related, and unbelted vehicle occupants
- Highways – Lane departure and intersection crashes

This data driven process that identified the driver behavior and infrastructure safety emphasis areas also identified crashes involving heavy vehicles as a priority in the western region. Statewide, severe crashes involving heavy vehicles accounts for 18 percent of all severe crashes, but over 30 percent of severe crashes in the western region involve heavy vehicles. In addition, 67 percent of all severe heavy vehicle crashes in North Dakota occur in the western region. As a result, addressing heavy vehicle related crashes is considered a priority in the western region. However, further analysis of these crashes determined that more than 80 percent of the heavy vehicle crashes occur on the State’s system of highways. This fact combined with the NDDOT’s greater access to financial resources led the NDDOT to take the responsibility for analyzing the details about heavy vehicle crashes. This will also include leading the effort to identify candidate locations and then developing and implementing truck related safety projects.

TABLE 2-2
 Western Region Severe Crashes by Safety Emphasis Areas (2009 to 2013)

Safety Emphasis Areas	Statewide (% of Total)	2009 to 2013 Severe Crashes					
		Western Region		State Roads		Local System	
		%	#	%	#	%	#
Total Severe Crashes	2,472	901		565		336	
Involving Drivers Under Age 21	21%	17%	157	15%	84	22%	73
Involving Drivers Over Age 64	12%	8%	71	9%	53	5%	18
Excessive Speed or Aggressive Driving	25%	26%	232	22%	126	32%	106
Alcohol-Related	29%	29%	265	24%	137	38%	128
Distracted, Asleep, or Fatigued Drivers	8%	7%	65	8%	45	6%	20
Unbelted Vehicle Occupants	48%	46%	414	41%	229	55%	185
Pedestrian	5%	3%	27	2%	9	5%	18
Bicycle	2%	1%	7	<1%	1	2%	6
Motorcycle	11%	7%	62	7%	41	6%	21

TABLE 2-2
 Western Region Severe Crashes by Safety Emphasis Areas (2009 to 2013)

Safety Emphasis Areas	Statewide (% of Total)	2009 to 2013 Severe Crashes					
		Western Region		State Roads		Local System	
		%	#	%	#	%	#
Heavy Vehicle	18%	30%	270	38%	217	16%	53
Train-Vehicle Collisions	1%	1%	5	0%	0	1%	5
Lane-Departure (Run-Off-the-Road and Head-On)	45%	52%	466	46%	262	61%	204
Head-On	8%	9%	84	13%	75	3%	9
Run-off-the-Road	38%	42%	382	33%	187	58%	195
Intersection	28%	25%	223	27%	152	21%	71
Work Zone	2%	2%	21	3%	18	1%	3
Deer Collisions	1%	<1%	2	<1%	2	0%	0
Adverse (Winter) Weather Related	17%	17%	151	21%	116	10%	35
Note: Severe crashes are those crashes that result in at least one fatality or incapacitating injury.							

Strategies to reduce severe crashes depend on whether a safety emphasis area is infrastructure-based or driver-behavior-based. Infrastructure-based emphasis areas refer to characteristics of the location (for example, a roadway segment, curve, or intersection) where crashes occurred. Driver-behavior-based emphasis areas refer to motorist characteristics or actions that contribute to crashes. Because driver behavior is tied to laws made at the national and state levels, roadway agencies generally have less ability to address driver-behavior-based emphasis areas. The most effective approach for road authorities to address driver-behavior-based emphasis areas is to focus on public education and law enforcement through cooperation and collaboration with other county departments, agencies, and schools. Generally, more opportunities exist for county and city road authorities to address infrastructure-based emphasis areas, because many of the associated strategies can be implemented as separate roadway improvement projects, or along with other planned improvements. Specific infrastructure- and driver-behavior-based strategies presented to the participants of the safety workshop held for the western region are provided in Section 3.2.

2.3 Crash Risk Factors

The objective of the analytical process is to identify candidates for safety investment based on two criteria: high-crash locations and at-risk locations. A more detailed crash analysis was performed for each priority crash type to identify: (1) locations where these priority crash types occur at a rate of one or more severe crashes per year, and (2) basic roadway and traffic characteristics of locations with severe crashes. These characteristics are not considered to be the cause of crashes, but instead are used to determine the risk that a future severe crash may occur at a particular location. Information from historic crashes was used to evaluate the remainder of the region’s local road system and prioritize locations for safety investment based on similar characteristics.

Urban counties are designated as those containing a city with a population greater than 5,000, while rural counties are those without cities exceeding this population. The cities of Dickinson and Williston are the subjects of the urban portion of this Plan for Phase 3 urban areas.

2.3.1 Rural Roadway Segments – Crashes on Paved Roads

Of the more than 97,500 miles of local road system in North Dakota, only 7 percent of the roads are paved. However, 40 percent of crashes occurred on paved roads. Therefore, the focus of the LRSP is on rural paved roadway segments.

There are 1,141 miles of rural paved county roads in the western region. From 2009 to 2013, 83 severe crashes were reported on these roads. The predominant crash type on these roads was single-vehicle (Figure 2-3). The following five risk factors were identified for rural lane departure crashes on paved roads in the western region counties:

1. **Average Daily Traffic (ADT)** – Of the rural paved roads, 28 percent have an ADT greater than 450 vehicles per day. However, 57 percent of the severe lane departure crashes occurred above this ADT (Figure 2-4). Therefore, any segment with an ADT greater than 450 vehicles per day received a star.
2. **Access Density** – Nationally, research has shown that an access density of eight or more access points per mile (including field entrances, commercial entrances, roadway access, etc.) increased the likelihood of a severe crash occurring. North Dakota’s review of severe crashes on their rural county roads (shown in Figure 2-5) demonstrates a similar relationship with a slightly lower threshold of six access points per mile. Therefore, any roadway segment with an access density greater than or equal to six access points per mile received a star.
3. **Lane-Departure Crash Density** – The average lane-departure crash density for the western region was 0.065 crash per mile. Due to limited number of crashes in each county, any roadway segment where the lane-departure crash density was greater than the average for the western region received a star.
4. **Critical Radius Curve Density** – Nationally, lane-departure crashes frequently occur within curves. Curves with radii between 500 and 1,200 feet (that is, critical radius curves) have a higher severe crash rate than other curves and roadway segments with more curves in this range are considered to have greater risk. The risk factor is determined by the number of critical radius curves divided by the length of the segment. The average critical curve radius density for these types of curves along roadway segments was 0.253 curve per mile for the western region. Any segment with a critical radius curve density greater than or equal to the region average received a star.
5. **Edge Risk Assessment (ERA)** – A rating system was developed to categorize the risk level of vehicles leaving the travel lane. Roads with a usable shoulder and reasonable clear zone received a rating of 1. Roads with little or no usable shoulder but with a reasonable clear zone received a rating of 2, as did roads with a usable shoulder but with fixed objects in the clear zone. Roads with no usable shoulder and fixed objects in the clear zone received a rating of 3. Examples of these edge risks are shown in Figure 2-6. Roads were evaluated using photos taken in the autumn of 2013 to determine the rating. Roads with a rating of 2 or 3 received a star.

Detailed segment analyses and results for the counties are provided in Chapter 4. A prioritization process for each roadway segment was put into place using the five risk factors by giving stars to each risk factor present. The highest-priority roadway segments received the most stars. In cases where roadway segments received the same number of stars, the ERA, and ADT were used to break the tie.

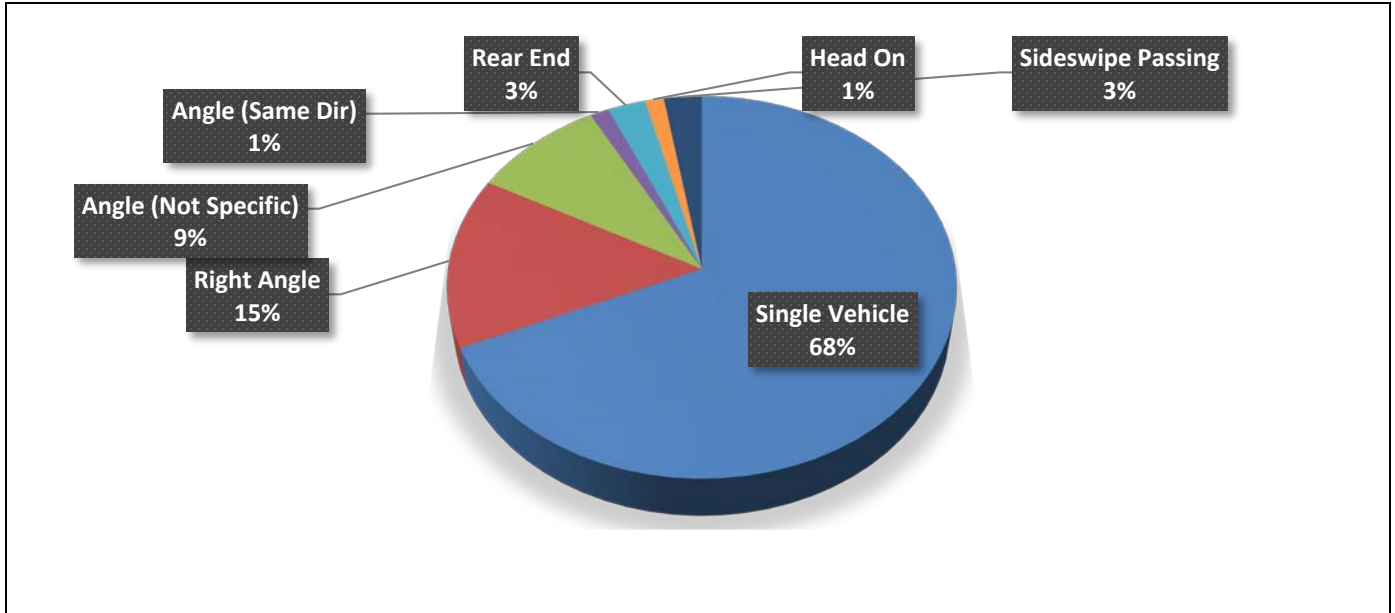


FIGURE 2-3
 Severe Crash Types on Rural Paved Road Segments in the Western Region (2009 to 2013)

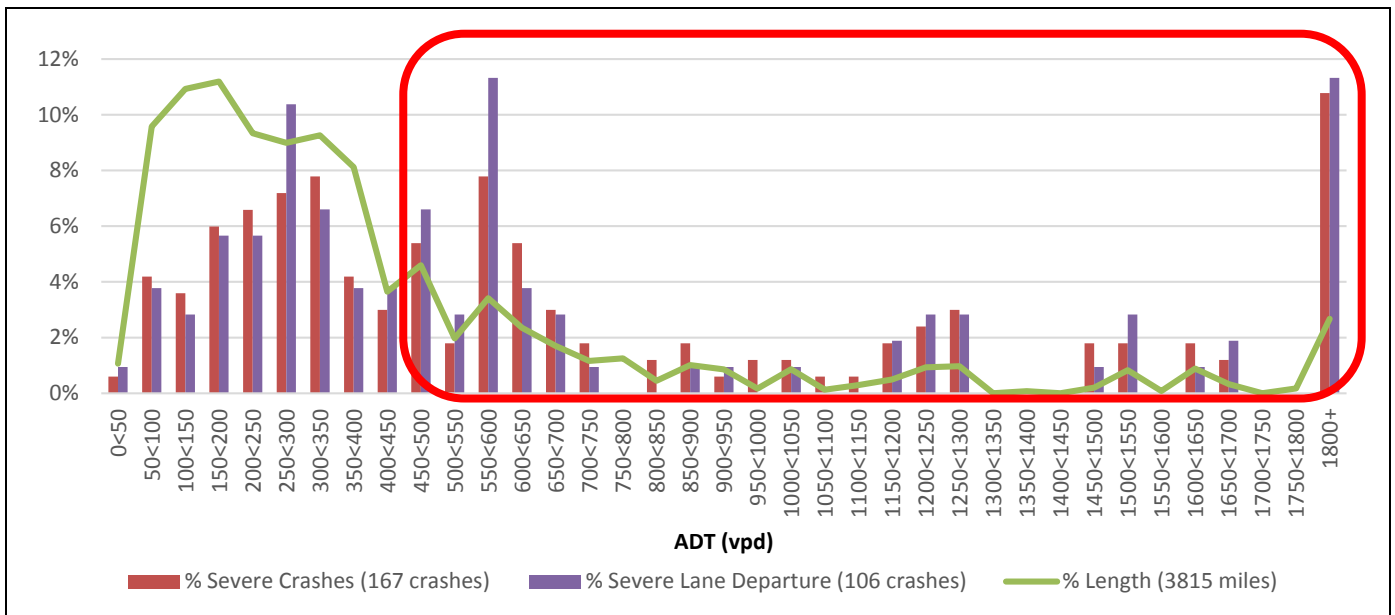


FIGURE 2-4
 Rural Roadway Segment Average Daily Traffic (ADT) Crash Data for All Phases
 Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

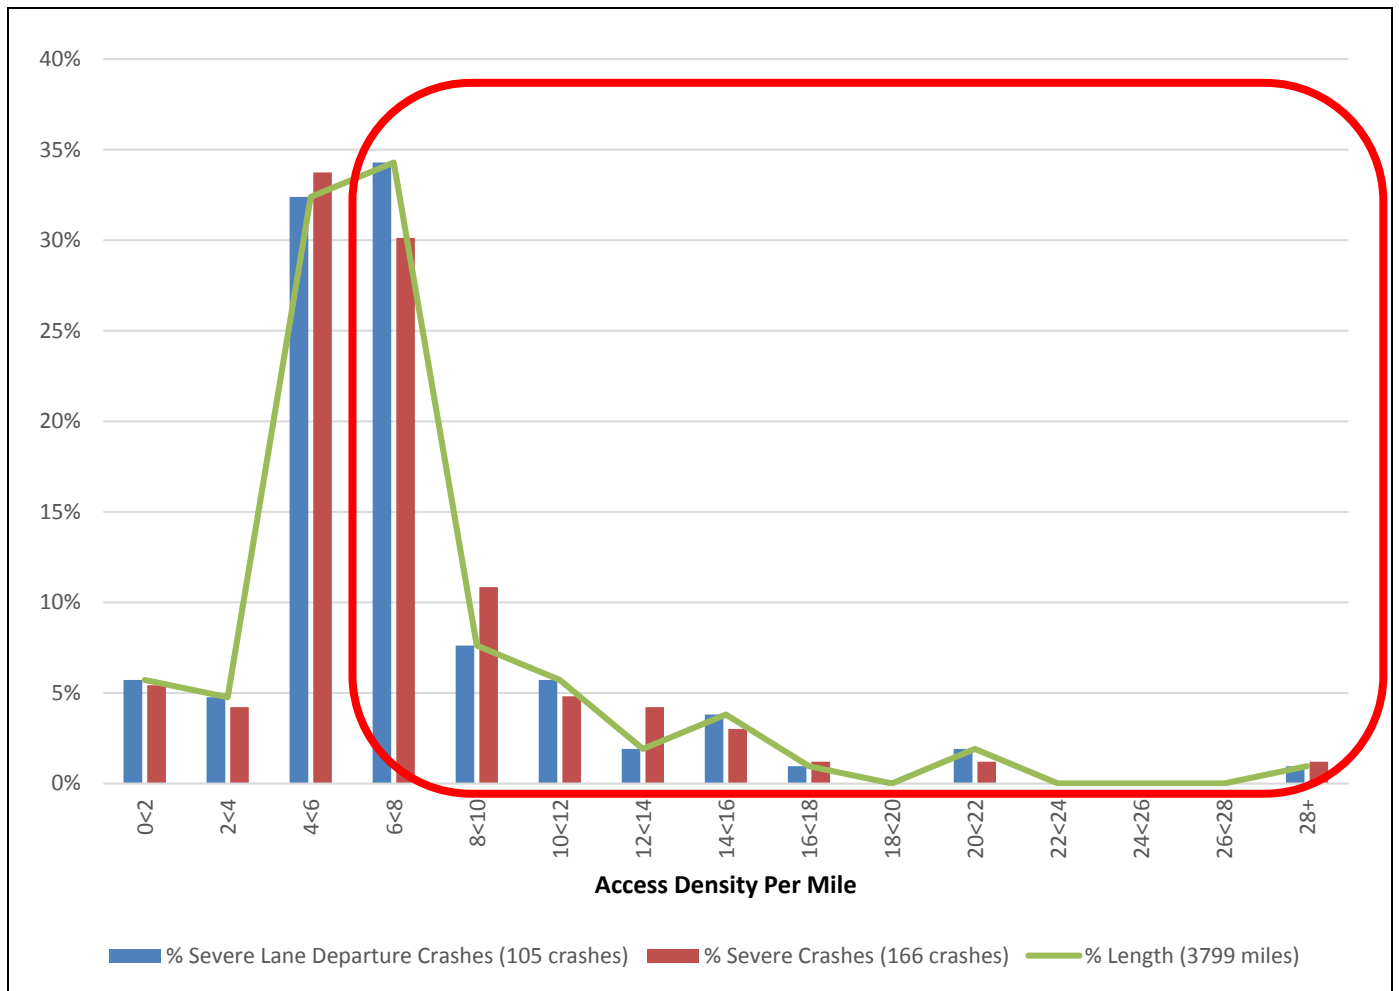


FIGURE 2-5
 Severe Crashes by Access Density on Rural County Roads for All Phases
 Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)



1 – Usable Shoulder, Reasonable Clear Zone

2 – No Usable Shoulder, Reasonable Clear Zone

2 – Usable Shoulder, Roadside with Fixed Obstacles

3 – No Usable Shoulder, Roadside with Fixed Obstacles

FIGURE 2-6
Sample Edge Risk Assessment Ratings and Descriptions

2.3.2 Rural Curves – Crashes on Paved Roads in Curves

Detailed crash analysis included horizontal curves on rural paved local roads. Research indicates horizontal curves with certain characteristics contribute to the overall frequency of lane-departure crashes. The 1,141 miles of rural paved roads in the western region contain 776 curves totaling approximately 131 miles in length (11 percent of the road system mileage).

With only 27 severe crashes along curves reported from 2009 to 2013, too few crashes occurred on these curves to serve as a reliable indicator of the relative degree of risk. However, data for all counties show the importance of safety improvements on curves to reduce severe crashes since many severe lane-departure crashes occur in curves. As a result, the LRSP team used characteristics of curves in the county where crashes had occurred, as well as available information from similar analysis of national and statewide data. Results from *Cost-Benefit Analysis of In-Vehicle Technologies and Infrastructure Changes to Avoid Crashes Along Curves and Shoulders* (compiled by the University of Minnesota and CH2M HILL in June 2009) were also used in curve analysis and prioritization.

Based on a review of these sources, the following five risk factors were identified for crashes along curves:

1. **Curve Radius** – The western region and all counties in Phases 1 through 3 did not have enough severe curve crashes to provide insight into North Dakota’s characteristics (Figure 2-7). National data shows that curves with mid-range radii had higher crash densities. An upper limit of 1,200 feet was used for at-risk curves, because 1,200 feet is a 60-mile-per-hour (mph) design speed based on AASHTO’s *A Policy on Geometric Design of Highways and Streets* (commonly referred to as the “Green Book;” 6th edition, 2011). A lower limit of 500 feet was used to represent the severe lane-departure crashes that were reported in the region from 2009 to 2013. Any curve with a radius between 500 and 1,200 feet received a star.
2. **Average Daily Traffic (ADT)** – Traffic volumes over 450 vehicles per day represent a higher risk for crashes (Figure 2-8). In the western region, 74 percent of severe lane-departure crashes occurred along curves with this ADT, while only 37 percent of curves are represented in this range. Therefore, curves with an ADT over 450 vehicles per day received a star.
3. **Intersection within the Curve** – In the western region, the presence of an intersection within a curve increased the risk for a severe crash. Curves with at least one intersection within the curve received a star.
4. **Visual Trap** – A visual trap exists when the crest of a vertical curve is located before a horizontal curve or where a minor road, tree line, or line of utility poles continues on a tangent to the curve, thereby creating the illusion that the road continues straight ahead (Figure 2-9). The presence of a visual trap increased the risk of crashes in the western region and, therefore, received a star.
5. **Severe Crashes** – If a severe crash occurred on a curve between 2009 and 2013, the curve received a star.

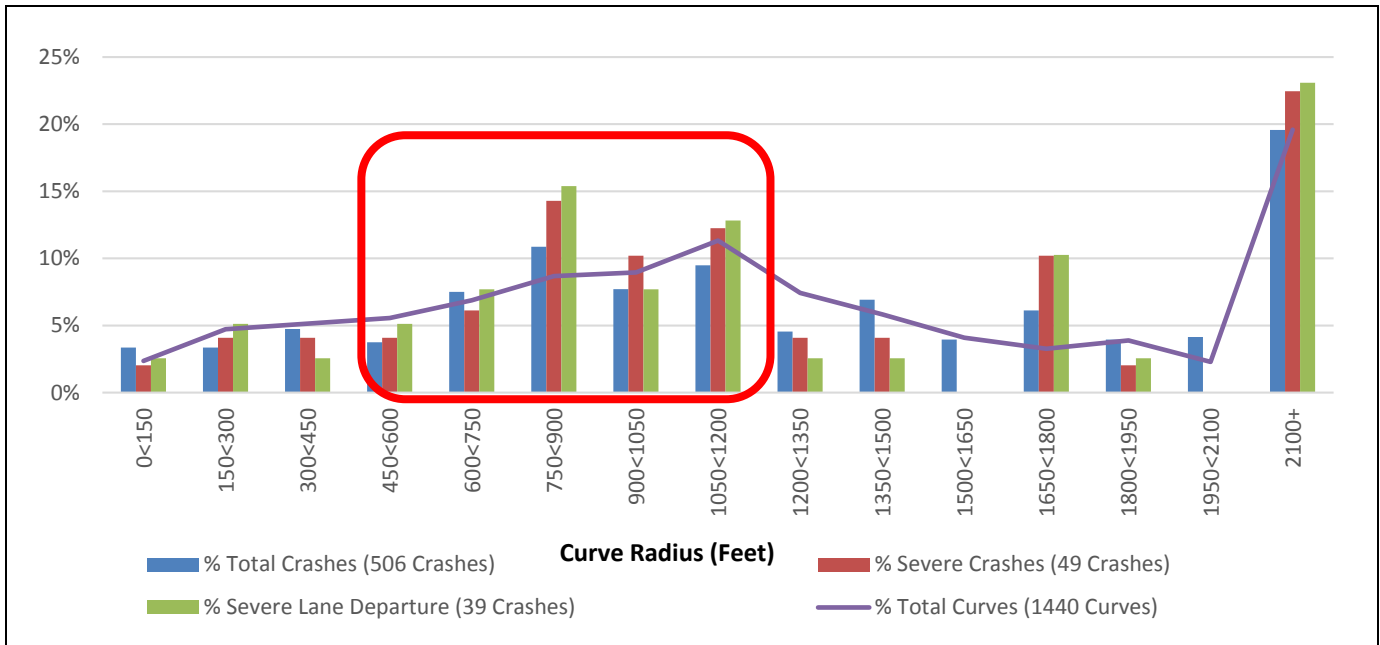


FIGURE 2-7
Rural Curve Crashes by Radii – 500 to 1,200 feet for All Phases
Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

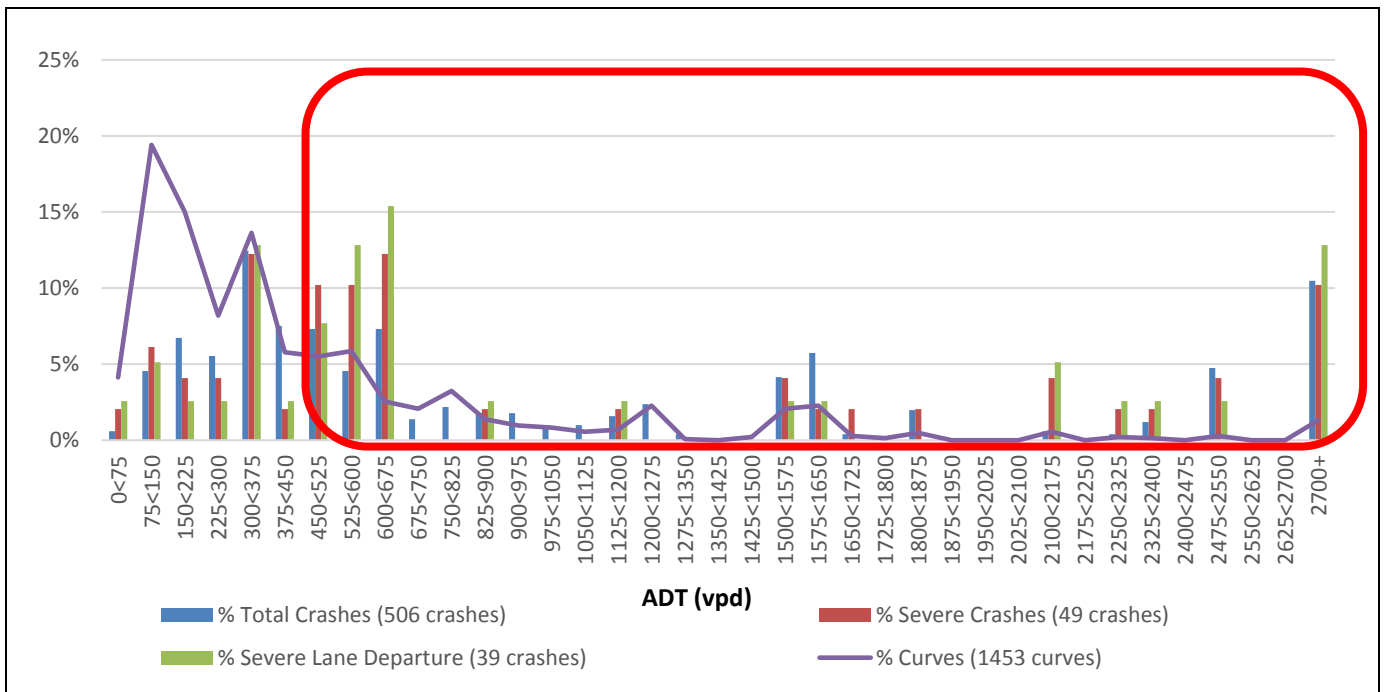


FIGURE 2-8
Rural Curve Crashes by Average Daily Traffic (ADT) – Greater than 450 Vehicles per Day for All Phases
Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)



FIGURE 2-9
Example of a Visual Trap – Minor Road Intersects Roadway on a Curve

Based on 240 total crashes and 22 severe lane-departure crashes along the curves on western region rural roads, those with intersections and visual traps have a higher crash density (are more at risk) than those without such features. These risk factors have also been observed nationally.

Detailed curve analyses and results for the counties are provided in Chapter 4. The five risk factors were used to prioritize curves in the county, with the highest-priority curves receiving the most stars. Curves were reviewed for proximity to high-priority curves and existing conditions as well.

Curves in the western region were screened for compliance with the *Manual on Uniform Traffic Control Devices* (MUTCD; 2009) requirement regarding traffic signs at horizontal curves. Under this requirement, a curve must have an advance horizontal alignment warning sign if the daily traffic is greater than 1,000 vehicles per day and if speed differentials (the difference between the speed limit and the advisory speed) meet certain thresholds. A horizontal alignment sign and advisory speed plaque are recommended when the speed differential is 5 mph, and they are required if the speed differential is 10 mph or greater. Curve radius was used to estimate whether individual curves meet the speed differential requirements for advance warning signs and advisory speed plaques. The estimated advisory speeds (assuming a 55-mph speed limit, 6-percent superelevation, and friction factor that are consistent with the AASHTO Green Book) based on the curve radius are as follows:

- 900 to 1,100 feet – 50 mph
- 700 to 900 feet – 45 mph
- 500 to 700 feet – 40 mph
- 300 to 500 feet – 35 mph
- Under 300 feet – 30 mph or slower

For this analysis, no suggested advisory speed is provided for curves with a radius under 300 feet; these curves should be investigated further by the county to determine the appropriate advisory speed. Additionally, it is recommended that the county complete its own ball-bank indicator assessment of all curves to determine whether the curves on their road system meet the MUTCD requirement and to verify suggested advisory speeds.

If a curve was not selected as a project candidate through the LRSP risk assessment process (although the curve has an ADT greater than 1,000 vehicles per day and a radius under 1,100 feet), the curve was flagged for the county to determine the need for additional signs based on MUTCD guidance.

2.3.3 Rural Intersections – Crashes at Thru-STOP Intersections

At western region rural intersections, a severe crash is most common at Thru-STOP intersections,¹ where 91 percent of severe intersection crashes (51 of 56 severe crashes) occurred from 2009 to 2013 (Figure 2-10). Severe right-angle and single vehicle crashes are the most common types of crashes at these intersections (Figure 2-11).

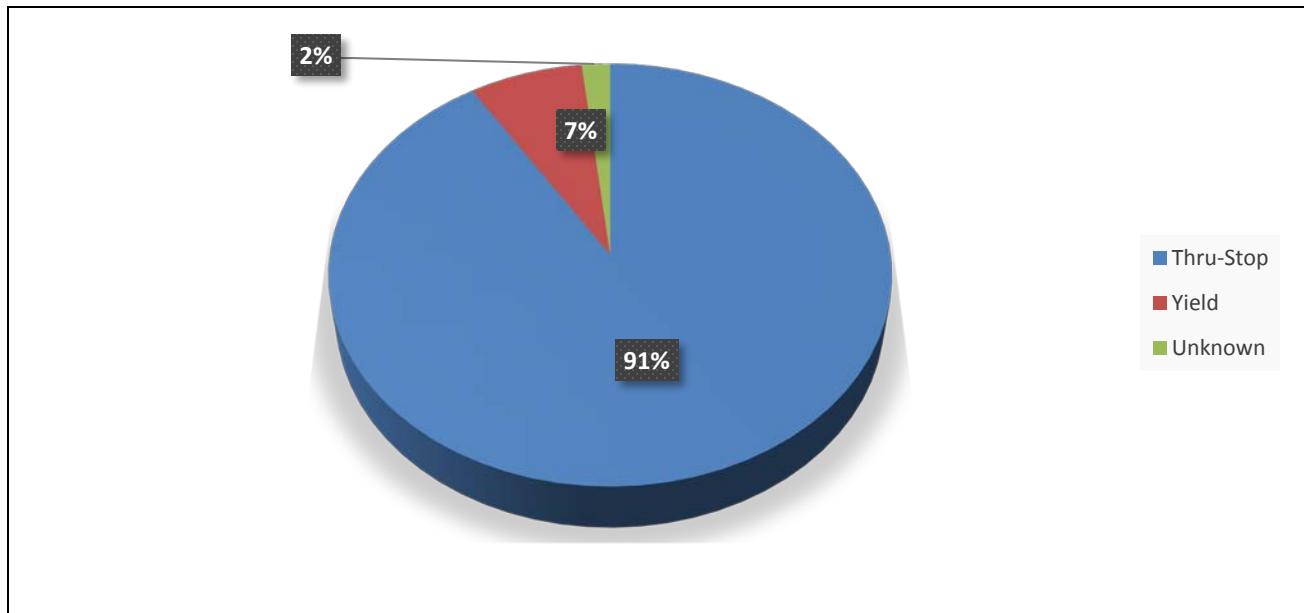


FIGURE 2-10
Phase 3 Rural Severe Crashes by Traffic Control Device (2009 to 2013)

¹ Those intersections where traffic on the more heavily used road may proceed through the intersection without stopping, while traffic on the less-used crossroad must stop at the STOP sign before proceeding through the intersection.

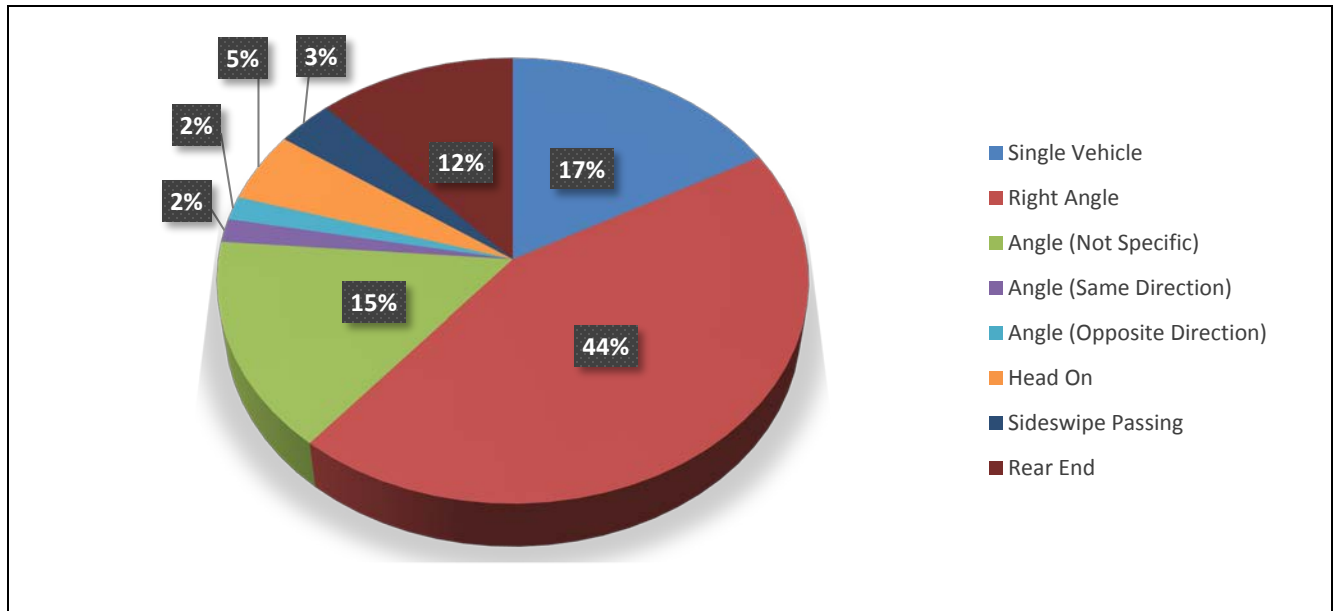


FIGURE 2-11
 Western Region Rural Intersection Severe Crashes by Crash Type (2009 to 2013)

In the western region, 584 rural intersections with 504 Thru-STOP locations were reviewed. The average severe crash density at rural Thru-STOP locations is 0.01 severe crash per intersection per year. This low density supports assessing an intersection risk based on the characteristics of the locations where severe crashes occurred. The following seven rural Thru-STOP risk factors were identified for severe right-angle crashes:

1. **ADT Cross Product** – 83 percent of the severe right angle crashes at rural Thru-STOP intersections occurred at intersections with an ADT Cross Product² of major and minor entering vehicles greater than 80,000 (Figure 2-12). An intersection was considered to have a higher risk of severe right angle crashes if the ADT Cross Product was greater than 80,000. These intersections received a star.
2. **Skew** – As the intersection skew (the angle at which one road intersects another) increases, the crash risk also increases (Figure 2-13). At a 20-degree skew, the crash risk compared to that of a 90-degree intersection is increased by approximately 10 percent. While the region’s severe right-angle crash data set was too small to determine if skew plays a role in crashes, it has been proven nationally that the greater the skew, the greater the likelihood for a crash (Figure 2-14). Intersections with a skew greater than 20 degrees received a star.
3. **Within or Near a Curve** – Research has shown that intersections located within or near a horizontal curve are subject to a higher level of risk. This risk factor was supported by the analysis (Figure 2-14). In this analysis, intersections located within or near a horizontal curve received a star.
4. **Development Present** – Research has shown that intersections with commercial development in one or more quadrants have a higher level of risk, possibly due to vehicles entering or exiting the development. Private residences or farms were not included as

² The ADT Cross Product is the major-street entering volume multiplied by the minor-street entering volume.

development. Intersections with development present had more severe crash rates (Figure 2-14) and therefore received a star.

5. **Railroad Crossing** - Intersections on or near a railroad crossing are subject to increased risk because drivers must navigate the railroad tracks while approaching the intersection. The rural analysis supported this risk factor (Figure 2-14). An intersection with a railroad crossing on one of the approaches received a star.
6. **Previous STOP More than 1 Mile Before the Intersection** - When traveling longer distances without encountering a STOP sign, drivers lose attention, and research has shown those intersections to be at higher risk (Figure 2-14). National data were used to confirm this risk factor. Intersections at which either of the stopped approaches do not encounter a STOP sign within 1 mile received a star.
7. **Total Crashes** - If an intersection had any type of crash from 2009 to 2013, the intersection received a star.

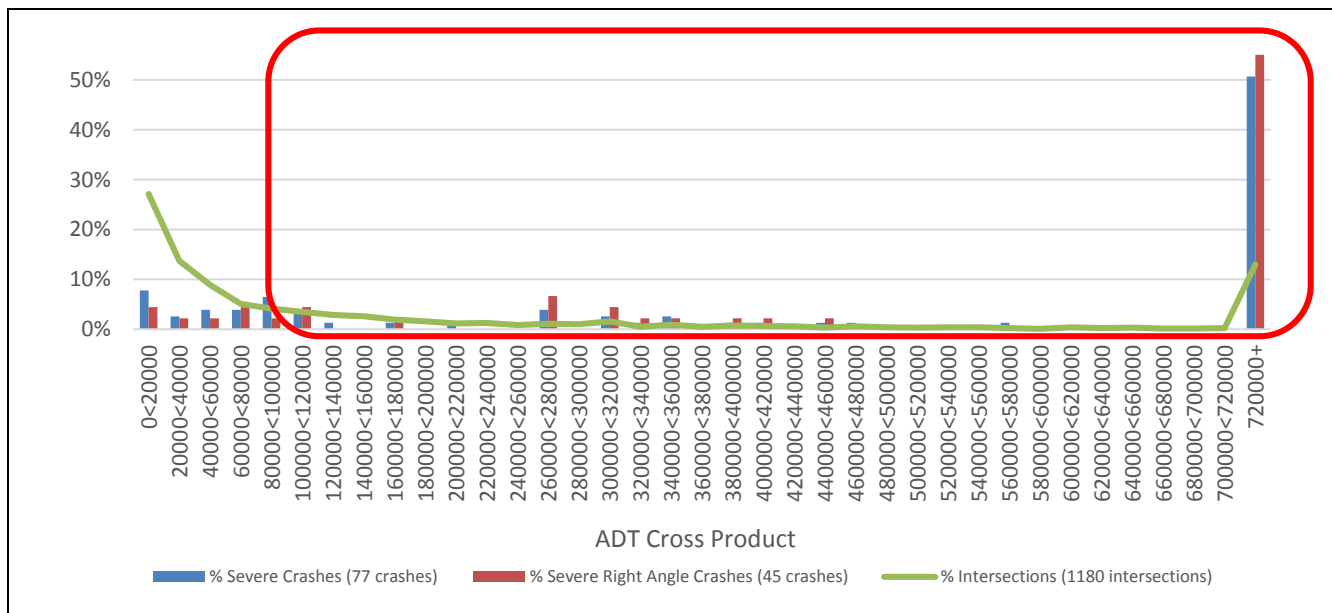


FIGURE 2-12
 Rural ADT Cross Product for All Phases
 Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

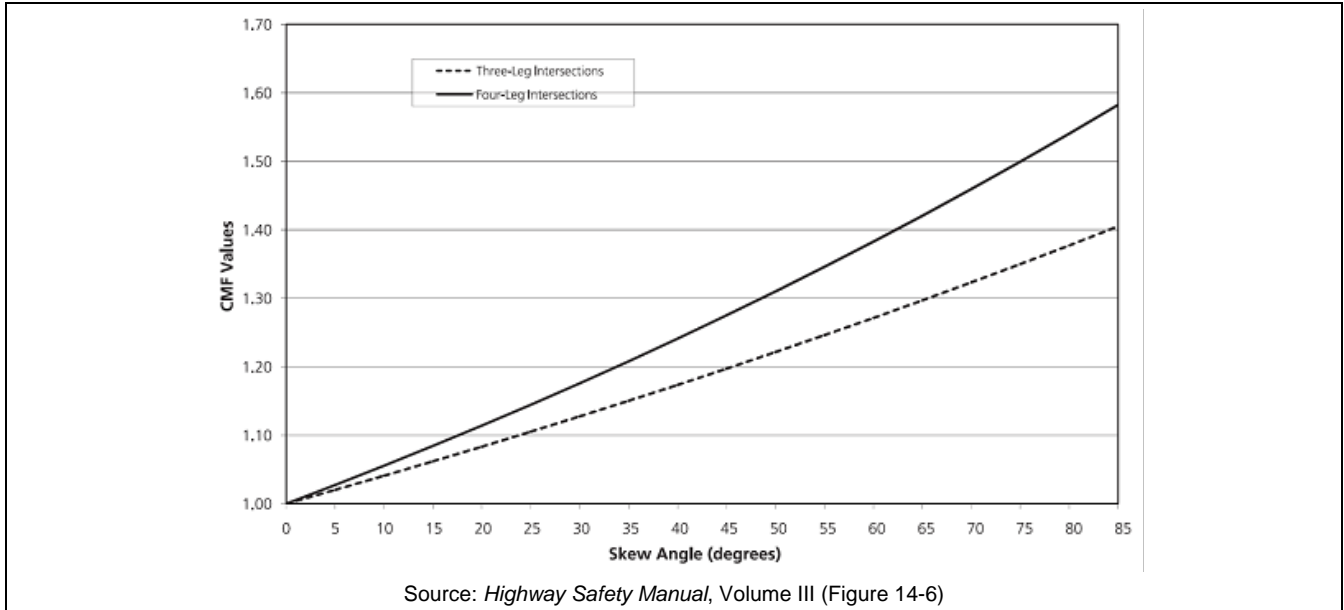


FIGURE 2-13
 Intersection Skew Risk

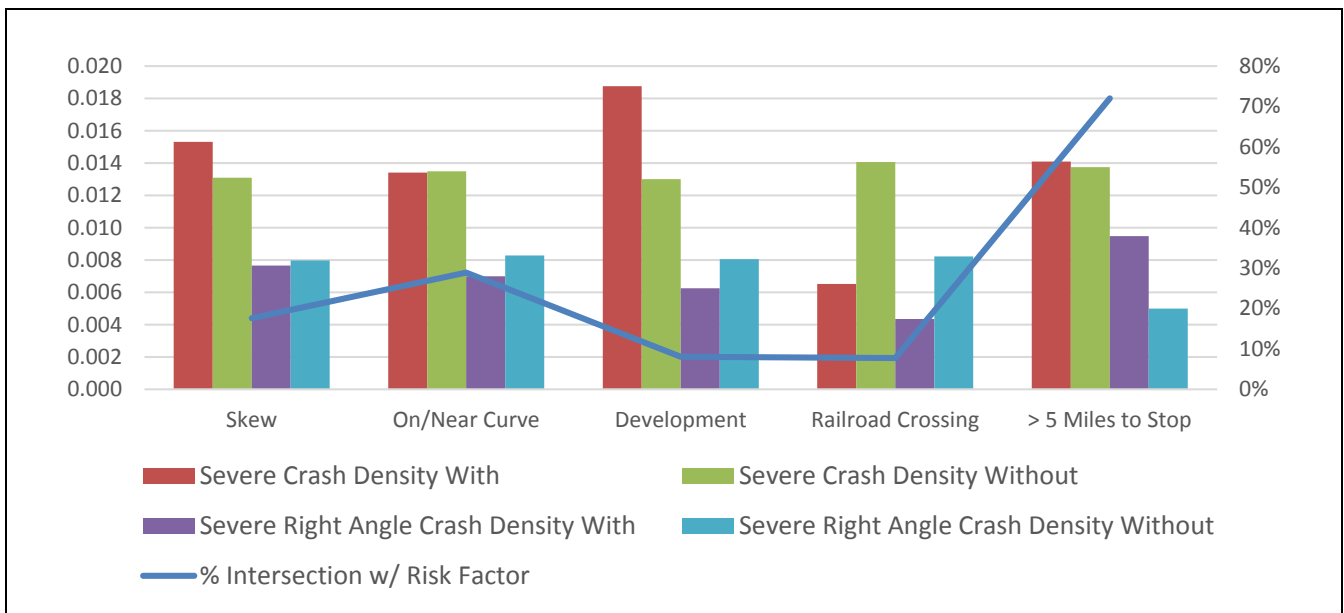


FIGURE 2-14
 Rural Intersection Risk Factors for All Phases
 Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

The western region had 584 total rural intersection crashes from 2009 to 2013, and only 56 of those crashes were severe. Due to the small number of severe crashes, some of the data and risk factors may be misleading based on the county data alone. National data were used to confirm intersection risk factors.

Detailed intersection analyses and results for the counties and cities are provided in Chapter 4. Due to the large number of intersections, each intersection was prioritized using the seven risk factors by giving stars to each risk factor present. The highest-priority intersections received the most stars. In cases where two or more intersections received the same number of stars, crash costs were used to break the tie and determine priority.

2.3.4 Urban Roadway Segments – Cities with Populations Greater than 5,000 (Cities of Dickinson and Williston)

Approximately 120 miles of urban local roads were reviewed, where 2,195 total and 36 severe crashes occurred from 2009 to 2013. Nationally, research has shown that rear-end and head-on crashes are most common on urban local roads. In the cities of Dickinson and Williston, 1,151 rear-end crashes and 203 head-on and sideswipe-opposing crashes occurred from 2009 to 2013.

Although a variety of data was collected for each local roadway segment, only the following four risk factors were identified for the cities of Dickinson and Williston:

1. **Average Daily Traffic (ADT)** – Both rear-end and head-on crashes were overrepresented in road corridors with ADT volumes greater than 5,000 vehicles per day (Figure 2-15). Corridors with an ADT greater than 5,000 vehicles per day received a star.
2. **Access Density** – Rear-end and head-on crashes are overrepresented along corridors with access densities greater than or equal to 30 access points per mile (Figure 2-16), and therefore received a star.
3. **Road Geometry** – Crashes are overrepresented per corridor mile on roadways with four or more lanes (Figure 2-17), and therefore multilane roadways were given a star.
4. **Speed Limit** – Severe rear-end and head-on crashes were overrepresented in low-speed corridors (between 30 and 40 mph) (Figure 2-18), and therefore received a star.

Detailed urban segment analyses and results for Dickinson and Williston are provided in Chapter 4. The four risk factors were used to prioritize roadway segments, with the highest priority segments receiving the most stars. High-priority roadway segments were also reviewed from a corridor perspective so that suggested safety improvement projects create a consistent corridor throughout the urban area.

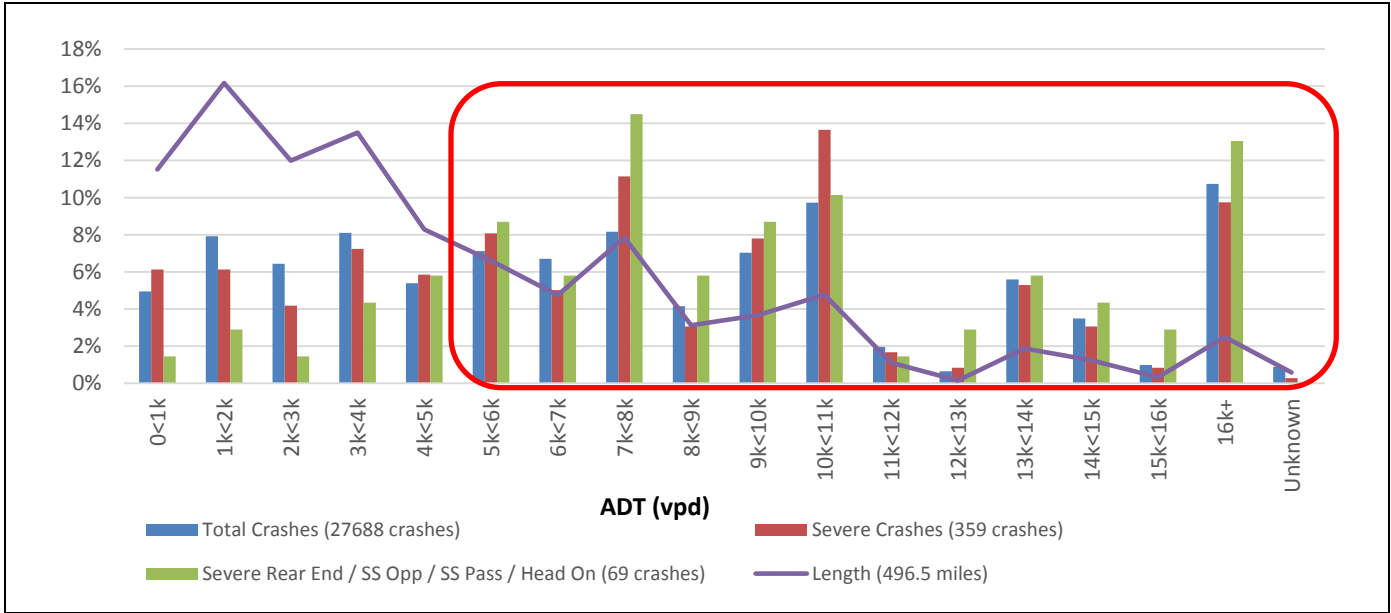


FIGURE 2-15
Urban Roadway Segment Average Daily Traffic (ADT) for All Phases
Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

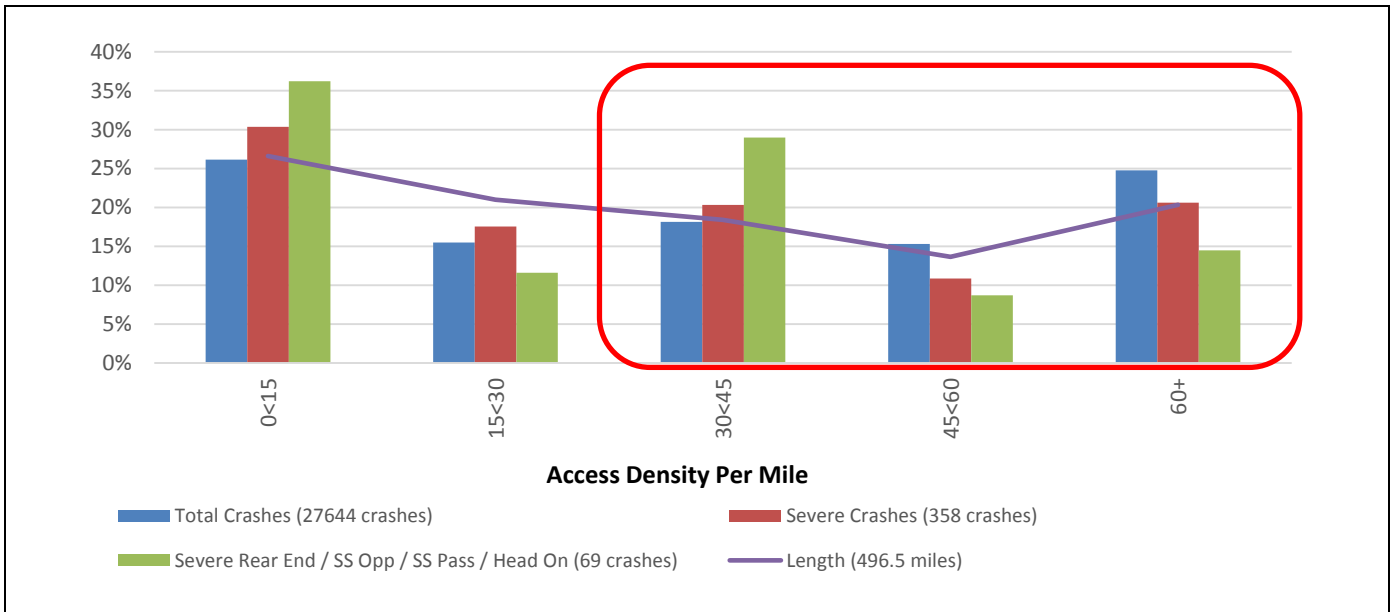


FIGURE 2-16
Urban Roadway Segment Access Density for All Phases
Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

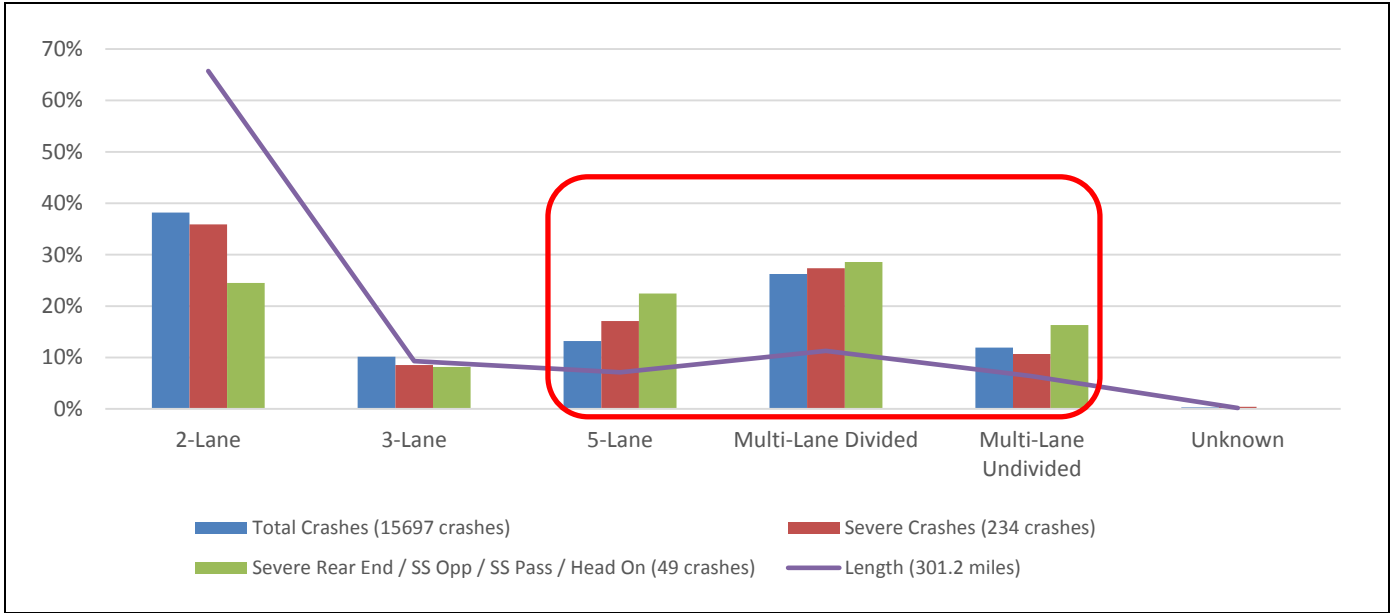


FIGURE 2-17
 Urban Road Geometry for All Phases
 Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

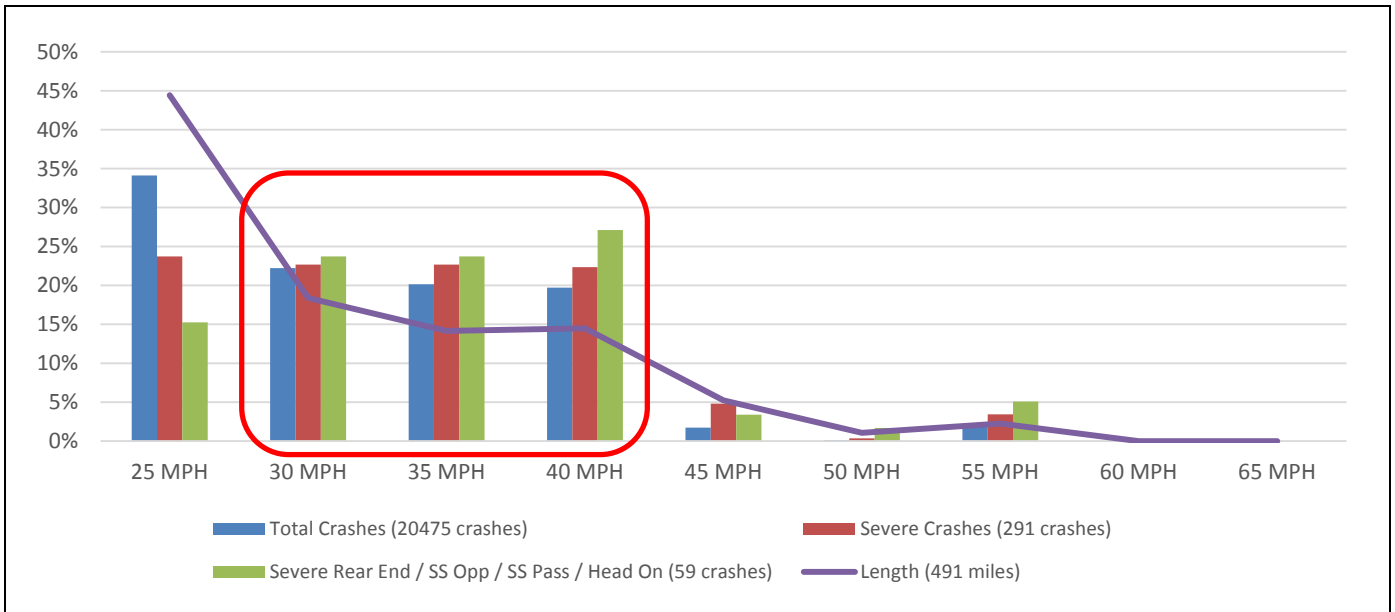


FIGURE 2-18
 Urban Roadway Segment Crashes by Speed for All Phases
 Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

2.3.5 Urban Intersections – Right-Angle Crashes, Cities with Populations Greater than 5,000 (Cities of Williston and Dickinson)

In the cities of Dickinson and Williston, 232 intersections, including 25 signalized intersections, were analyzed. Of the over 2,195 total crashes, only 36 severe crashes occurred at the Dickinson and Williston urban intersections that were analyzed. This data supports assessing an intersection's risk based on the characteristics of those locations with severe crashes. From the variety of information collected for each intersection, the following six risk factors for right angle crashes were chosen:

1. **Traffic Control Device** – Severe crashes are overrepresented at signalized intersections versus other intersection control types in urban areas (Figure 2-19). Therefore, signalized intersections received a star.
2. **Entering ADT** – Higher volumes of vehicles entering intersections was considered a risk factor. Approximately 35 percent of right angle crashes at signalized intersections in the urban areas for all phases occurred at intersections with an entering ADT greater than 17,500 vehicles per day (Figure 2-20). Therefore, any intersection with an entering ADT greater than 17,500 vehicles per day received a star.
3. **Road Geometry** – Severe and right-angle crashes were overrepresented on divided roadways with signalized intersections (Figure 2-21). Therefore, intersections on divided roadways received a star.
4. **Major Corridor Speed Limit** – Low-speed corridors were found to act as a surrogate for severe angle crashes (Figure 2-21). Therefore, intersections with speed limits between 30 and 50 mph received a star.
5. **Total Lanes on Major Approach** – Severe and severe angle crashes were overrepresented at intersections containing five or more approach lanes (Figure 2-22). Therefore, intersections with five or more approach lanes received a star.
6. **Severe Crashes** – Any intersection where one or more severe crashes had occurred received a star.

Detailed urban intersection right angle analyses and results for the cities of Dickinson and Williston are in Chapter 4. The risk factors previously listed were used to help prioritize intersections with the highest-priority intersections receiving the most stars. Right angle crash intersections were reviewed as urban corridors to create a consistent corridor throughout the urban area and to discourage implementing strategies at just one or two high-priority intersections along a corridor if the remaining intersections have the same characteristics.

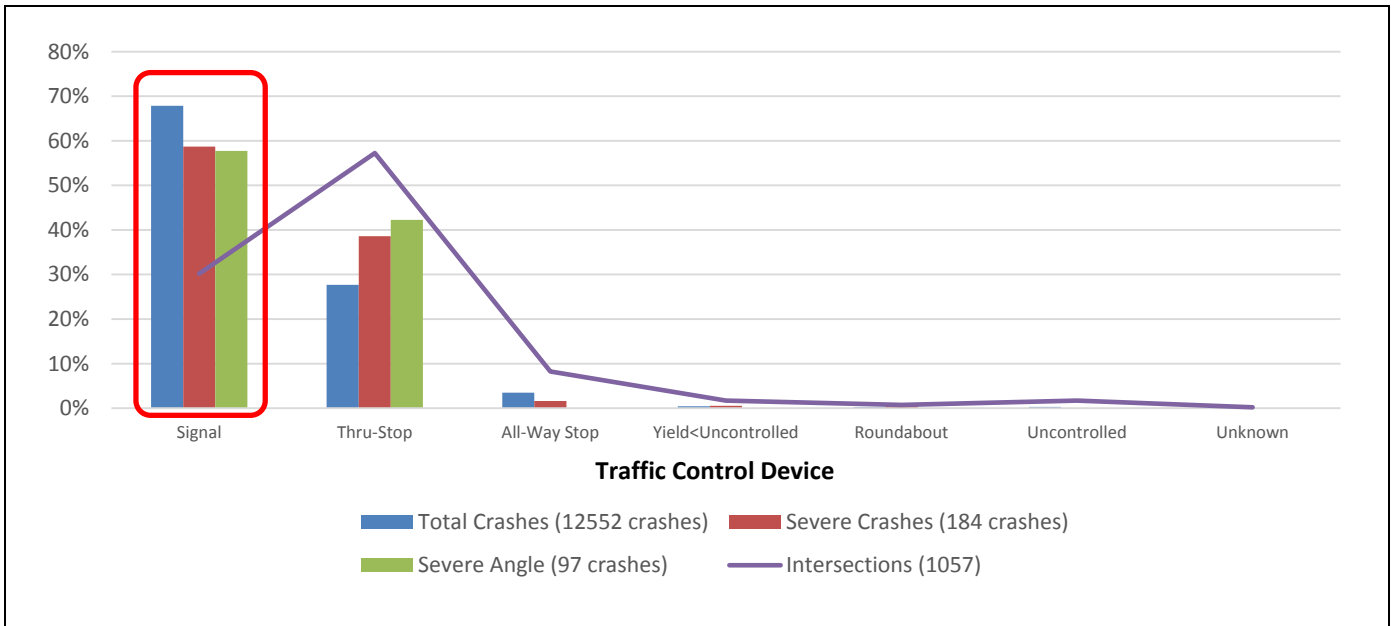


FIGURE 2-19
Urban Crashes by Intersection Traffic Control Device for All Phases
Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

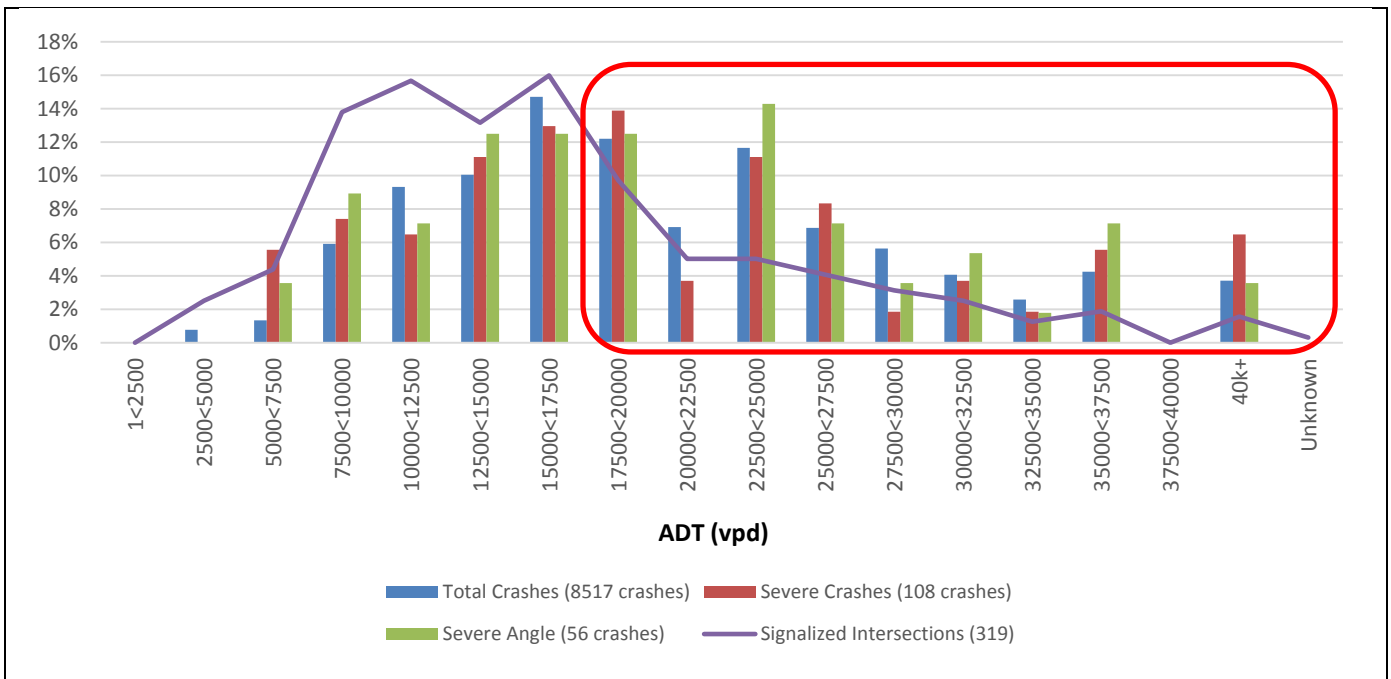


FIGURE 2-20
Urban Crashes by Intersection Entering Vehicles Average Daily Traffic (ADT) for All Phases
Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

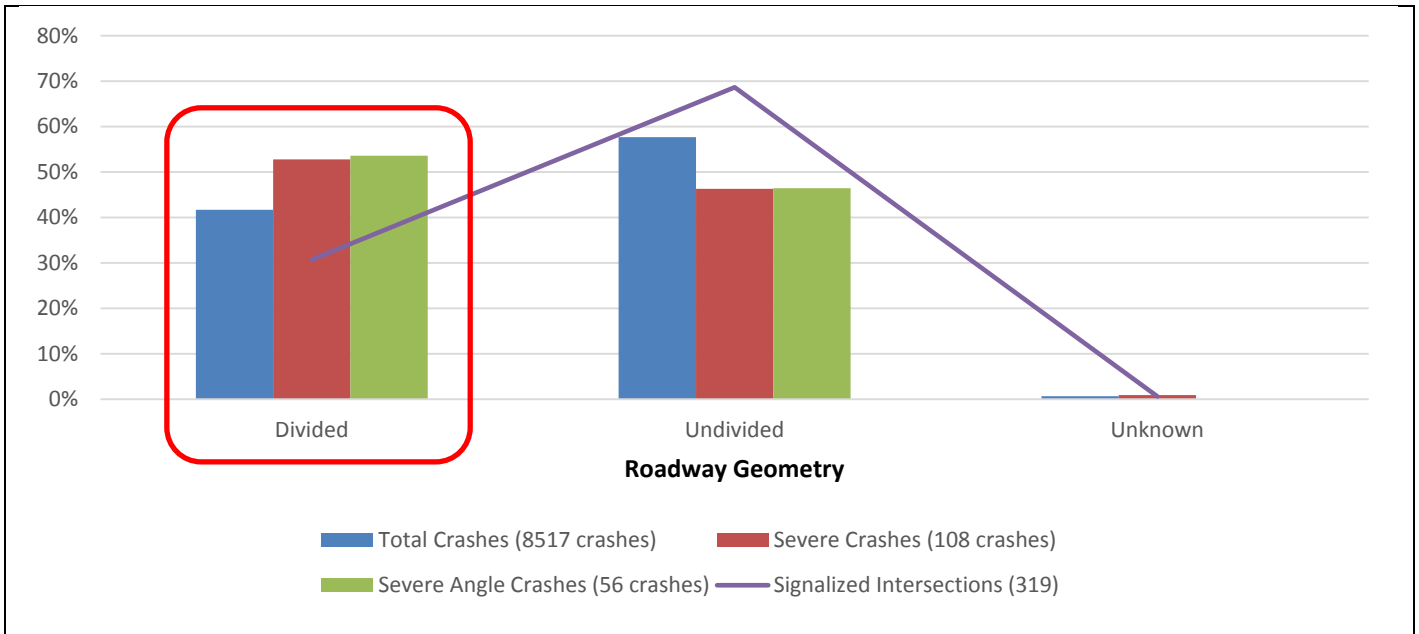


FIGURE 2-21
 Urban Crashes by Road Geometry at Intersections for All Phases
 Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

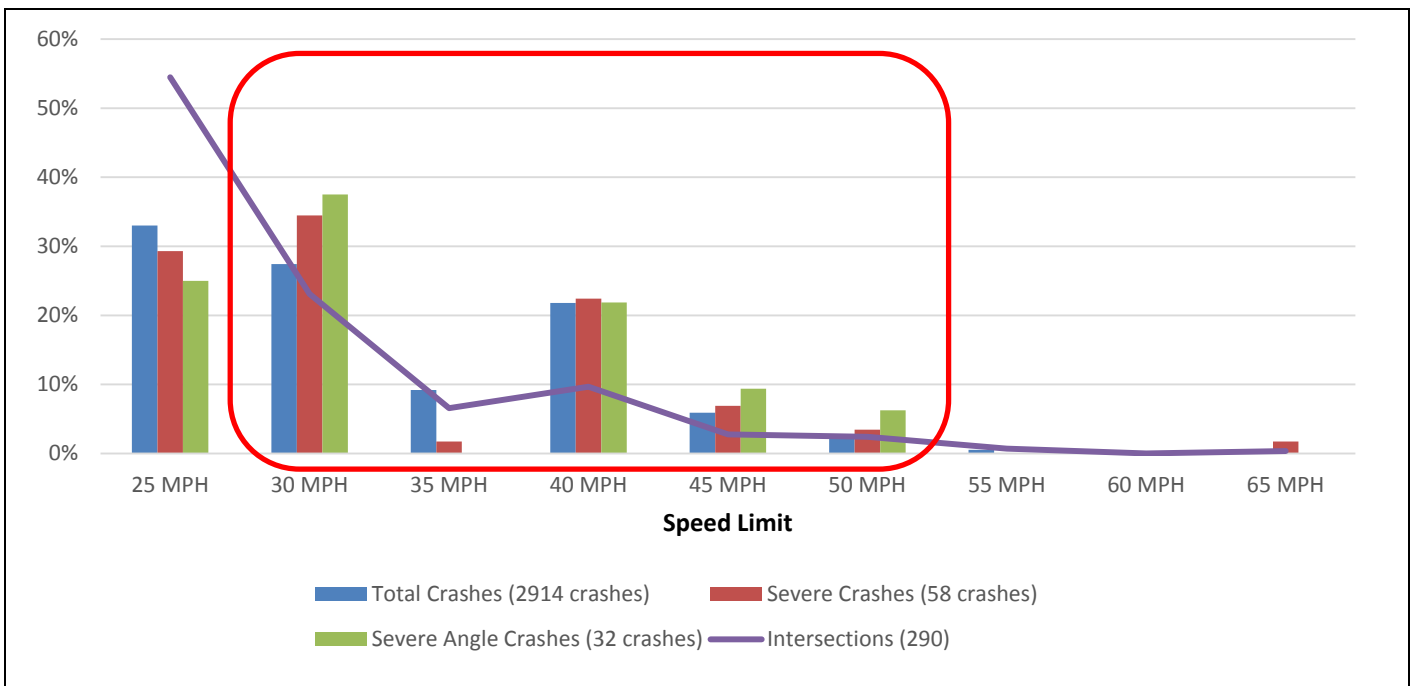


FIGURE 2-22
 Urban Crashes by Intersection Approach Speed Limit for All Phases
 Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

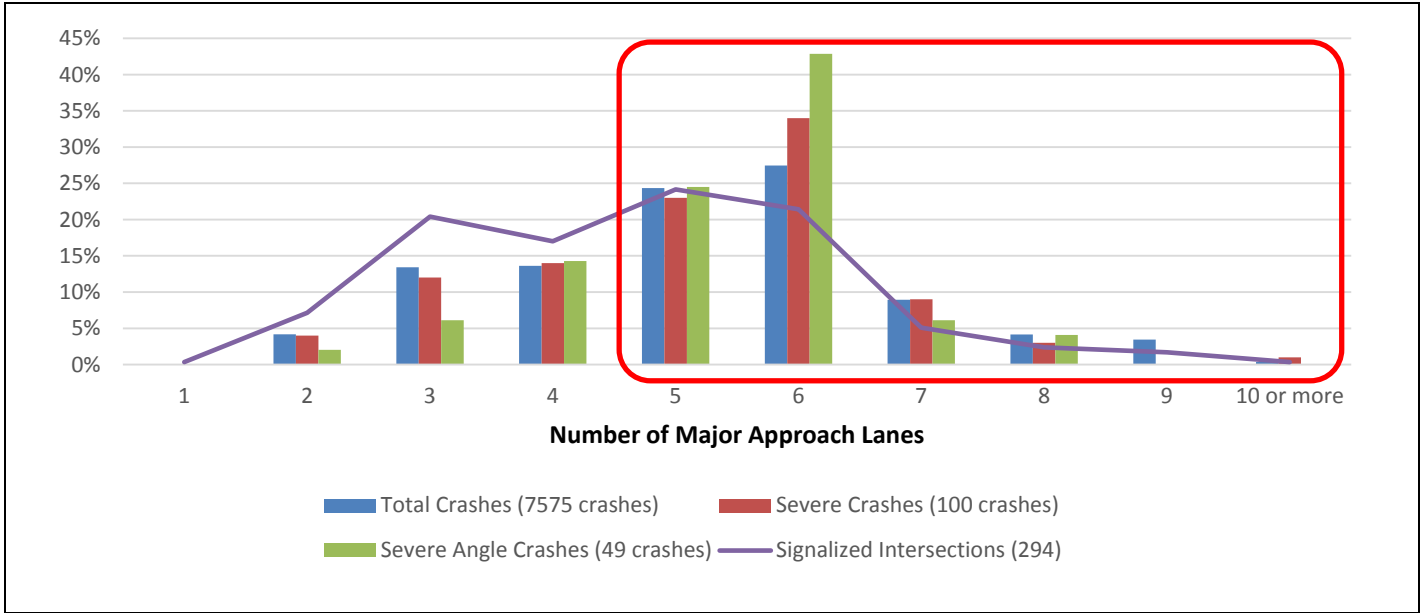


FIGURE 2-23
 Urban Signalized Intersection Crashes by Major Approach Lanes Distribution for All Phases
 Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

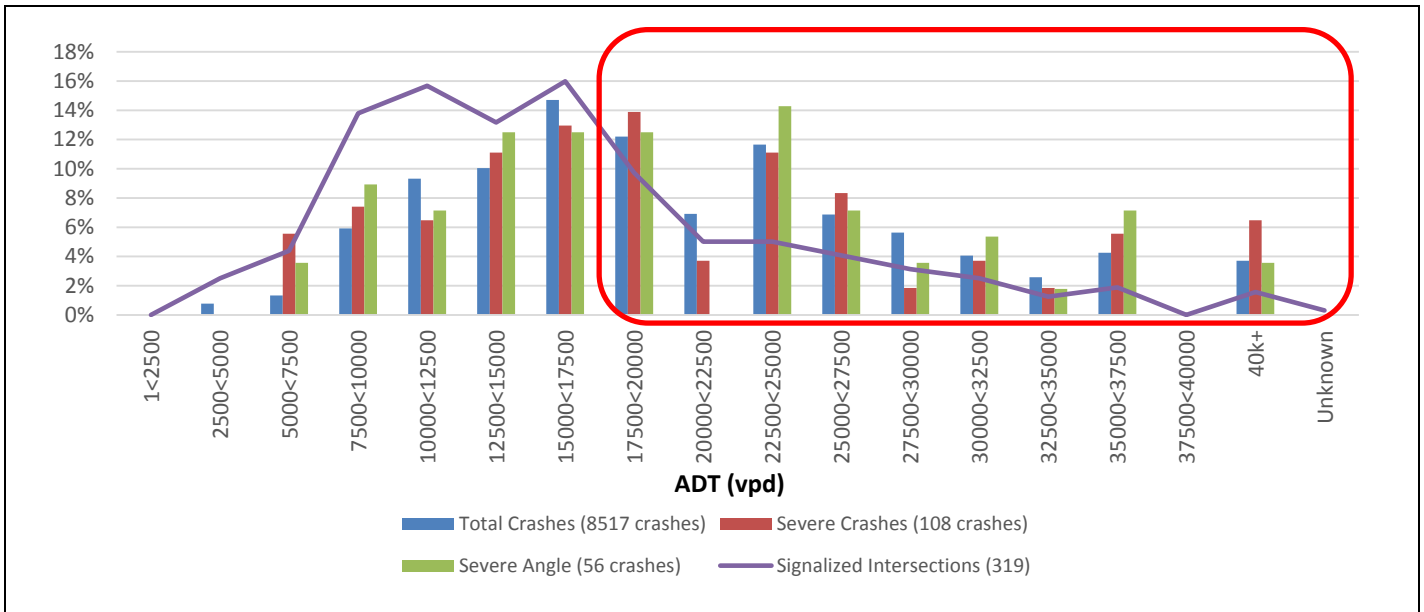


FIGURE 2-24
 Urban Crashes by Intersection Entering Vehicles Average Daily Traffic (ADT) for All Phases
 Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

2.3.6 Urban Intersections – Pedestrian/Bicycle Crashes, Cities with Populations Greater than 5,000 (Cities of Dickinson and Williston)

A similar analysis was completed for pedestrian and bicycle crashes at intersections. A total of 36 severe pedestrian and bicycle crashes occurred at urban North Dakota intersections studied during the first three phases. The following six risk factors were identified based on the analysis:

1. **Traffic Control Device** - Severe pedestrian and bicycle crashes are overrepresented at signalized intersections versus other intersection control types in urban areas (Figure 2-23). Therefore, signalized intersections received a star.
2. **Entering Vehicles ADT** - A high volume of vehicles entering an intersection was considered a risk factor. A majority of the severe pedestrian and bicycle crashes occurred at intersections with an entering vehicles ADT greater than 15,000 vehicles per day (Figure 2-24). Therefore, any intersection with an entering vehicles ADT greater than 15,000 vehicles per day or greater received a star.
3. **Pedestrian Generator** - Intersections with adjacent land uses likely to generate pedestrian traffic (such as a school, playground, bar, or gas station) had a higher pedestrian and bicycle crash risk than other intersections (Figure 2-25). Therefore, an intersection with a pedestrian generator present received a star.
4. **Major Corridor Speed Limit** - Low-speed corridors were found to act as a surrogate for severe pedestrian and bicyclist crashes (Figure 2-26). Therefore, intersections with low speed limits (between 30 and 40 mph) received a star.
5. **Total Lanes on Major Approach** - Pedestrian and bicycle crashes were overrepresented at intersections containing between two and five approach lanes (Figure 2-27). Therefore, intersections with between two and five approach lanes received a star.
6. **Pedestrian and Bicycle Crashes** - Any intersections that had any bicycle or pedestrian crash from 2009 to 2013 received a star.

Detailed urban intersection pedestrian and bicycle analysis and results for the cities of Dickinson and Williston are provided in Chapter 4. The six risk factors were used to prioritize intersections with the highest-priority intersections receiving the most stars. Pedestrian and bicycle crash intersections were reviewed as urban corridors to create a consistent corridor throughout the urban area.

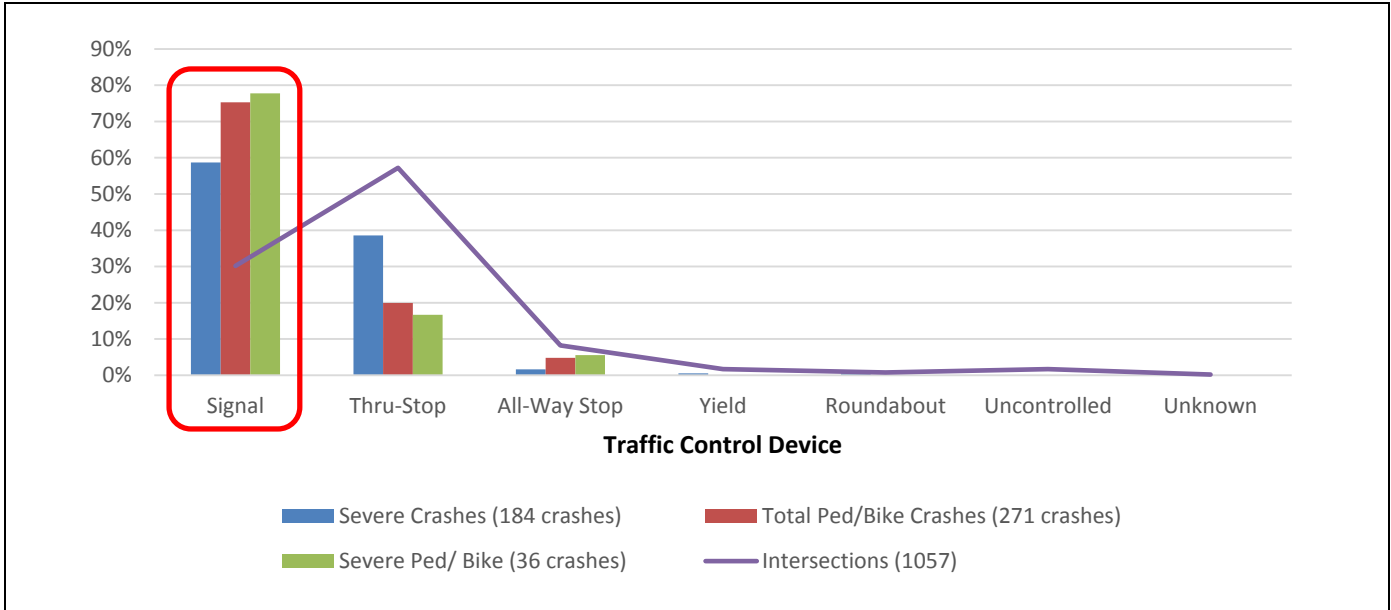


FIGURE 2-25
Urban Pedestrian/Bicycle Crashes by Intersection Traffic Control Devices for All Phases
Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

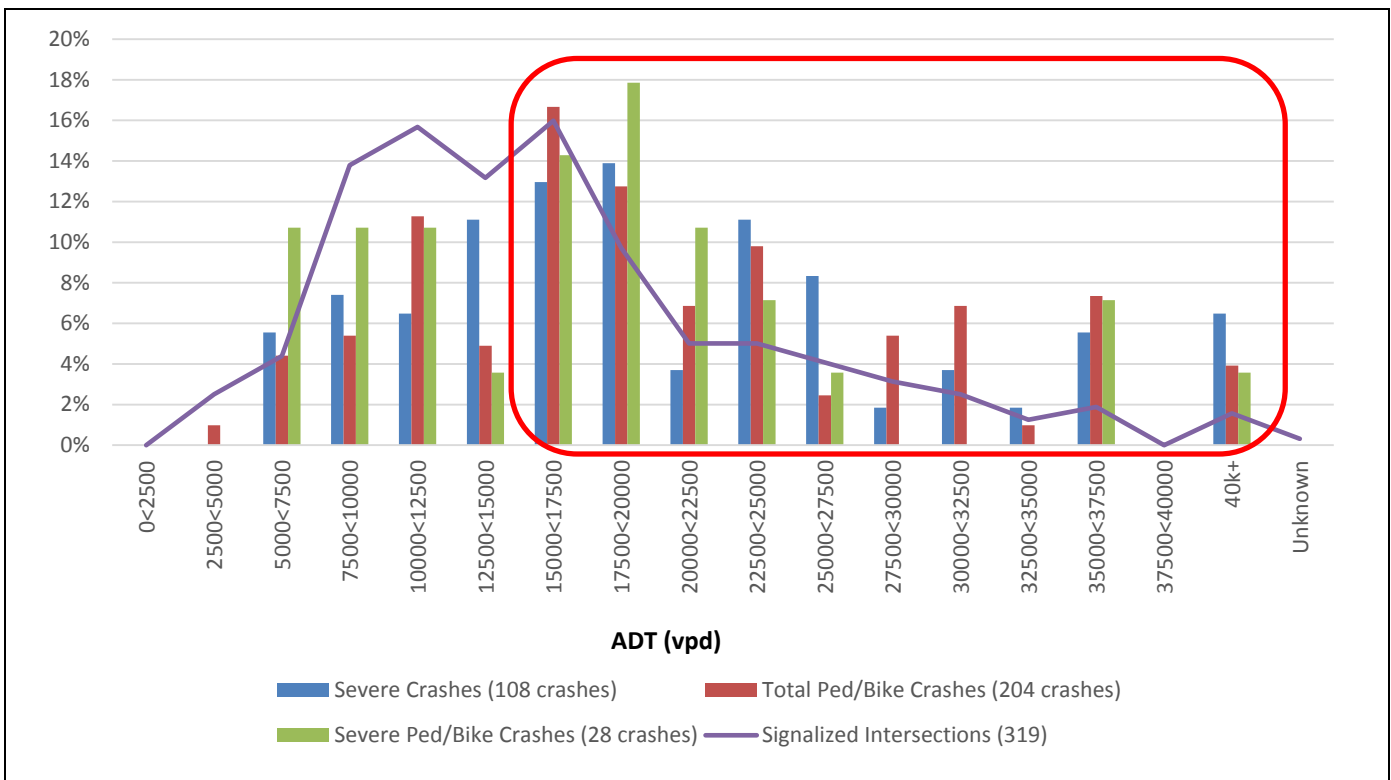


FIGURE 2-26
Urban Pedestrian/Bicycle Crashes by Average Daily Traffic (ADT) for All Phases
Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

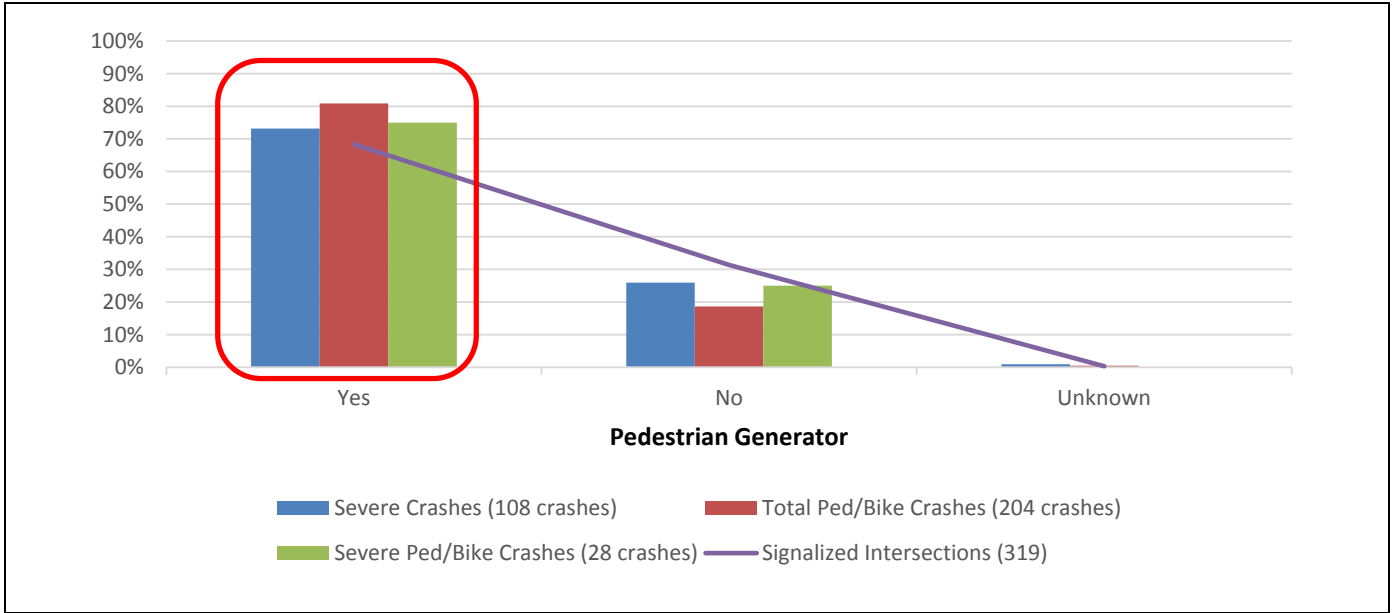


FIGURE 2-27
 Pedestrian/Bicycle Crashes at Urban Intersection with a Pedestrian Generator for All Phases
 Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

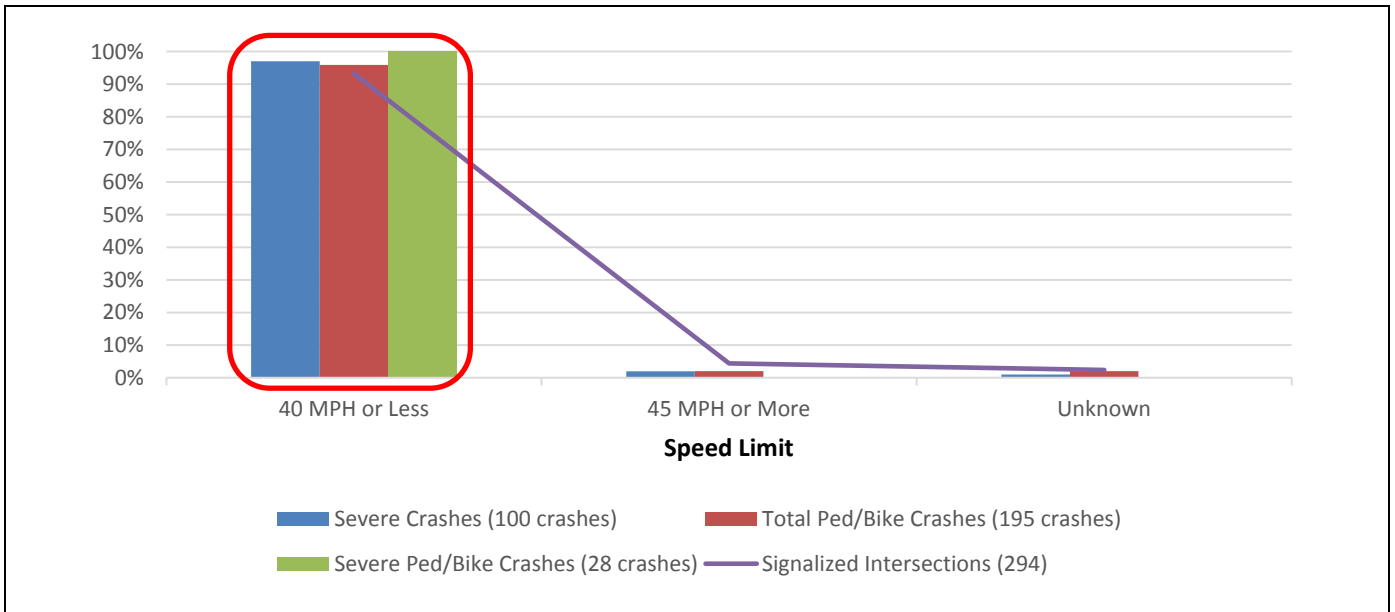


FIGURE 2-28
 Urban Pedestrian/Bicycle Crashes by Speed Limit for All Phases
 Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

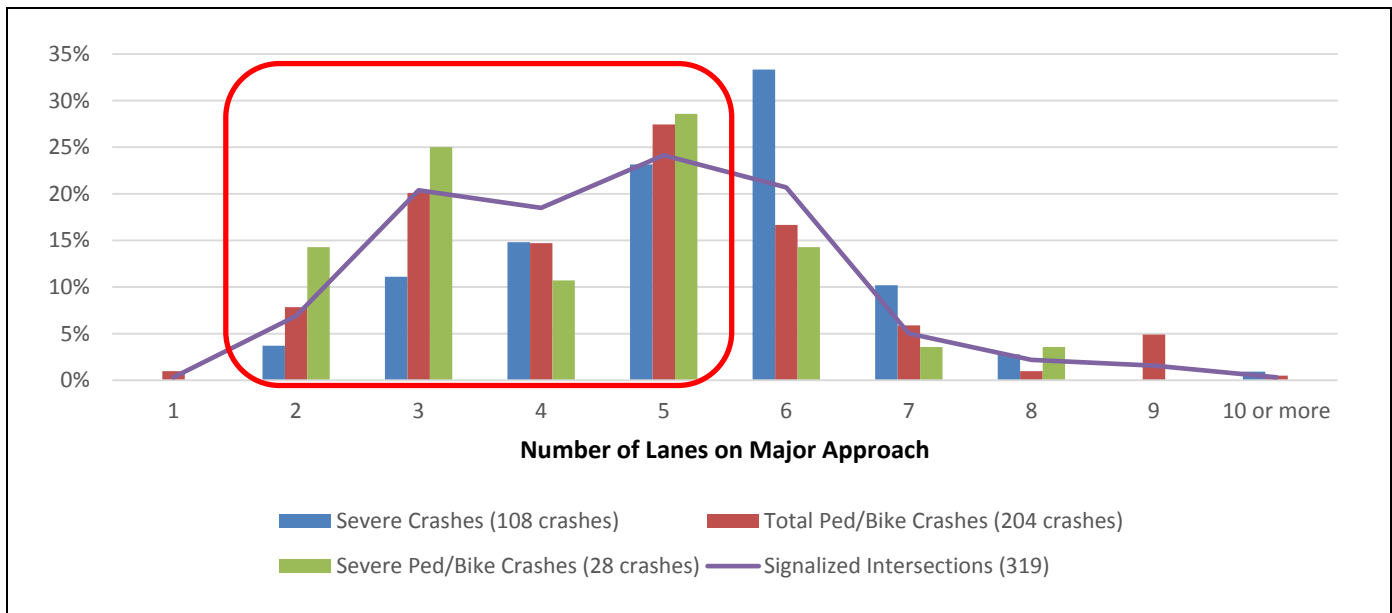


FIGURE 2-29
Urban Pedestrian/Bicycle Crashes by Number of Lanes on the Major Approach Lanes for All Phases
Source: NDDOT Crash Reporting System, 2008-2012 (Phase 1 and Phase 2), 2009-2013 (Phase 3)

2.4 Western Region Risk Summary

Table 2-3 summarizes the risk factors, ranges, and sources used in the western region’s systemic analysis.

TABLE 2-3
Western Region Risk Summary

Risk Factors	Western Region		
	Minimum	Maximum	Source
Rural Roadway Segments			
ADT Range	450	Unlimited	All Rural Phases 1 through 3
Access Density	6	Unlimited	All Rural Phases 1 through 3
Lane Departure Density	0.065	Unlimited	All Rural Phases 1 through 3
Curve Critical Radius Density	0.253	Unlimited	Rural Phase 3
ERA	2	3	All Rural Phases 1 through 3
Rural Curves			
Radius	500	1,200	National
ADT Range	450	Unlimited	All Rural Phases 1 through 3
Intersection on Curve	Present		All Rural Phases 1 through 3
Visual Trap	Present		All Rural Phases 1 through 3
Severe Crashes	1	Unlimited	All Rural Phases 1 through 3

TABLE 2-3
 Western Region Risk Summary

Risk Factors	Western Region		
	Minimum	Maximum	Source
Rural Intersections			
ADT Cross Product	80,000	Unlimited	All Rural Phases 1 through 3
Skew	Present		All Rural Phases 1 through 3
On/Near Curve	Present		All Rural Phases 1 through 3
Development	Present		All Rural Phases 1 through 3
Railroad Crossing	Present		National
Previous STOP >5 Miles	Present		All Rural Phases 1 through 3
Total Crashes	1	Unlimited	All Rural Phases 1 through 3
Urban Roadway Segments			
ADT	5,000	Unlimited	All Urban Phases 1 through 3
Road Geometry	Multilane (4+)		All Urban Phases 1 through 3
Access Density	30	Unlimited	All Urban Phases 1 through 3
Corridor Speeds	30	40	All Urban Phases 1 through 3
Urban Right-Angle Crash Corridors			
Entering ADT	17,500	Unlimited	All Urban Phases 1 through 3
Traffic Control	Signal		All Urban Phases 1 through 3
Major Corridor Speeds	30	50	All Urban Phases 1 through 3
Road Geometry	Divided		All Urban Phases 1 through 3
Total Lanes on Major Approach	≥5 Approach Lanes		All Urban Phases 1 through 3
Severe Crashes	1	Unlimited	All Urban Phases 1 through 3
Urban Pedestrian and Bicycle Crash Corridors			
Traffic Control	Signal		All Urban Phases 1 through 3
Entering ADT	15,000	Unlimited	All Urban Phases 1 through 3
Major Corridor Speeds	30	40	All Urban Phases 1 through 3
Pedestrian Generator	Yes		All Urban Phases 1 through 3
Total Lanes on Major Approach	2	5	All Urban Phases 1 through 3
Pedestrian/Bicycle Crashes	1	Unlimited	All Urban Phases 1 through 3
Notes: ADT = average daily traffic ERA = edge risk assessment			

3.0 Western Region Priority Safety Strategies

3.1 Background

A variety of strategies are available to address each safety emphasis area. The implementation of high-priority strategies will assist state and local agencies in reducing traffic-related fatalities and incapacitating injuries. The primary sources for these strategies are the National Cooperative Highway Research Program (NCHRP) *Report 500* series and the National Highway Traffic Safety Administration (NHTSA) *Countermeasures That Work: A Highway Safety Countermeasure Guide for State Highway Safety Offices*, (Seventh Edition, 2013). Each guide includes a description of the issue, strategies, and model implementation processes. In addition, to assist practitioners in assessing the safety strategies, the guides document the expected effectiveness of each strategy. NCHRP *Report 500* series assigns strategies to one of the following categories:

- **Proven:** These strategies have been used in multiple locations with multiple studies, and have been demonstrated to be effective.
- **Tried:** These strategies have been implemented in many locations; however, no rigorous evaluations have been completed to determine their effectiveness.
- **Experimental:** These strategies represent ideas that are considered to be effective; however, the ideas have not been widely implemented or evaluated.

3.2 Initial/Comprehensive List of Potential Strategies

NCHRP safety strategies were the basis for identifying safety strategies for the LRSP. For the LRSP process, NDDOT team members sought to identify viable safety strategies for the top safety emphasis areas (see Tables 3-1 through 3-12). The LRSP team reviewed the full range of safety strategies, and did an initial screening based on cost and effectiveness. For example, the NCHRP report lists over 70 potential strategies to address intersection safety. The screening conducted by the LRSP team narrowed the list of strategies for all safety emphasis areas down to strategies considered to be the most applicable in North Dakota.

Behavioral strategies include information on the expected effectiveness of the strategy to influence driver behavior based on current best practice and evaluation research results when available.

Each infrastructure strategy includes information on the relative cost to implement or operate, along with the typical timeframe for implementation. Relative costs were separated into low, medium, and high categories.

The relative costs for the lane departure strategies are:

- Low = less than \$10,000 per mile
- Medium = between \$10,000 and \$100,000 per mile
- High = more than \$100,000 per mile

The relative costs for the intersection strategies are:

- Low = less than \$100,000 per location
- Medium = between \$100,000 and \$500,000 per location
- High = more than \$500,000 per location

The typical timeframe to implement the strategy was also separated into three categories:

- Short = less than 1 year to implement
- Medium = between 1 and 2 years to implement
- Long = more than 2 years to implement

TABLE 3-1
 Impaired Driving Strategies (Behavioral Strategies)

Objectives	Strategies	Effectiveness	Programs and Tactics
A – Eliminate Drinking and Driving	A1 – Conduct alcohol screening and brief interventions	Proven	Implement health care provider interventions with crash victim after an alcohol-related crash (traumatic event) to screen for alcohol use problems, educate on risks of impaired driving, and treatment referral. Develop fact sheets and materials to be used.
	A2 – Support community programs for alternative transportation	Proven	Employ “Safe Cab” initiatives via partnership among beer distributors, bar owners and/or county/city community programs. Conduct public outreach on accessible safe-ride alternatives.
	A3 – Promote North Dakota “No Refusal” Law	Moderate	Educate high-risk populations/communities on North Dakota’s new “No Refusal” law where consequences of DUI test refusal are greater than test failure.
	A4 – Promote North Dakota sobriety initiatives for DUI offenders	Proven	Promote 24/7, DUI courts, and ignition interlock programs through educating local judicial and legal counsel members, probation officers, counseling and treatment providers as well as the general public.
B – Enforce DWI Laws and Strengthen Adjudication of DUI Offenses	B1 – Expand use of high-visibility DUI enforcement saturations including sobriety checkpoints	Proven	Conduct multi-agency, multi-squad car enforcement efforts. Agencies work in collaboration to provide data-driven, high-visibility education/media outreach and enforcement for high-risk roadways.
	B2 – Educate and enforce zero tolerance laws for drivers under age 21	Tried	Conduct education and high-visibility enforcement through community events including local media and public outreach about underage drinking and driving.
	B3 – Strengthen DUI convictions and sentencing through justice system evaluation and outreach	Tried	Assess local DUI prosecution and sentencing data to determine DUI plea bargain and conviction rates, as well as a comparative analysis with other North Dakota district courts. Conduct outreach with judicial personnel (prosecutors and judges) where data indicates higher DUI dismissal or plea bargain rates.
	B4 – Strengthen alcohol compliance of liquor-providing establishments	Tried	Advocate for responsible alcohol server and retailer training and compliance checks. Promote judicial monitoring of “last place of drink” for bar-related DUI offenders and notify establishments of their over-serving.

TABLE 3-2
 Seat Belt Use Strategies (Behavioral Strategies)

Objectives	Strategies	Effectiveness	Programs and Tactics
A – Publicize and Enforce Seat Belt Use Laws	A1 – Conduct high-visibility enforcement to maximize restraint use	Proven	Conduct a multi-agency, multi-squad car enforcement effort. Agencies work in collaboration to provide data-driven, saturated, high-visibility enforcement coupled with media outreach targeted toward high-risk populations. Conduct enhanced enforcement on North Dakota’s secondary roads. Incorporate enhanced nighttime enforcement including multi-agency (when possible) and multiple squad cars in well-lit areas where slow moving vehicles are passing and conducting seat belt observations for a limited time.
	A2 – Enforce North Dakota’s secondary belt use law	Proven	Reinforce officers issuing second belt use ticket during traffic stops.
	A3 – Pursue tribal ordinances for primary enforcement of seat belt law	Proven	Under tribal ordinance, pursue primary seat belt enforcement for occupants in all seating positions.
B – Maximize Use of Occupant Restraints by All Vehicle Occupants	B1 -- Encourage employer traffic safety programs and policies	Tried	Encourage employers to offer traffic safety education programs to employees and to enact traffic safety policies with clear consequences for failure to comply.
	B2 – Conduct brief intervention regarding unbelted risks	Experimental	Health care provider conducts brief intervention with crash victim after an unbelted crash (traumatic event) on unbelted risks and consequences.
	B3 -- Provide insurance incentives	Experimental	Promote local insurance provider incentives (for example, reduced premium rates) for safe driving practices including belt use at the time of traffic crash.

TABLE 3-3
 Speed and Aggressive Driving Strategies (Behavioral Strategies)

Objectives	Strategies	Effectiveness	Programs and Tactics
A – Deter Aggressive Driving for High-risk Populations and Locations	A1 – Identify high-risk speed locations/corridors for enforcement.	Proven	Strengthen crash data analysis to define high-risk speed/aggressive driving locations (including intersections) for enhanced enforcement and public outreach efforts.
	A2 – Conduct high-visibility enforcement of speeding and aggressive driving	Proven	Conduct a multi-agency, multi-squad car enforcement effort. Agencies work in collaboration to provide data-driven, saturated, high-visibility enforcement at high-risk speed/aggressive driving roadways and intersections coupled with media outreach to high-risk populations.
	A3 – Pursue local/tribal use of automated enforcement in high-risk areas	Proven	Pursue the use of automated enforcement in high-risk highway work zones and school crossing zones through the use of local/tribal safety ordinances.
B – Maximize Driver Compliance and Awareness	B1 – Conduct brief interventions for speed-related injuries	Tried	Implement health care provider brief interventions with crash victims after crash (traumatic event) due to excessive speed on speed risks and consequences.
	B2 – Increase driver awareness of speed using speed reader boards	Proven	Expand use of speed reader boards providing feedback to drivers on their actual speed (e.g., flash warnings when speeds exceeds limit). Most effective in slowing traffic on residential streets, near school zones, and around playgrounds.

TABLE 3-4
 Young Driver Strategies (Behavioral Strategies)

Objectives	Strategies	Effectiveness	Programs and Tactics
A – Publicize, and Enforce Laws Pertaining to Young Drivers	A1 – Conduct high visibility enforcement of GDL, no cell and texting laws, underage drinking and driving, and seat belt use laws	Proven	Conduct enhanced enforcement and public outreach for young driver safety. Publicizing is best done through community events to attract local media and a community public education campaign about young driver laws, enhanced enforcement, and the necessary parental involvement.
B – Actively Engage Parents in Managing Teen Driving Skill Development	B1 – Encourage driver education providers (local schools and private providers) to require parent education component	Tried	Promote required parent education component of local driver education programs (private and public school providers) to educate parents about teen driving risks, Graduated Driving License (GDL) provisions and their protections, parental role in supervising teen driving skill development, encourage selection of safer vehicles for teen driver, and to facilitate parent/teen driving agreements.
	B2 – Promote use of in-vehicle teen safety technology	Experimental	To help reduce and eliminate teen driving distractions and high-risk driving maneuvers (excessive speed, hard acceleration, deceleration, and swerves) promote the use of in-vehicle monitoring devices for parental monitoring and coaching.
	B3 – Promote safe teen driving outreach	Tried	Encourage driver education, local insurance, and public health organizations to provide teens and their parents with brochures, guides, and web resources to help parents understand risks, GDL provisions, their role, and how to develop a Parent/Teen Driving Agreement, and online driving logs.
	B4 – Provide information on insurance provider parent-teen safe driving programs	Tried	Inform parents of local insurance programs providing policy discounts for parents and their teen enrolling in parent-teen safe driving programs.
C – Promote Young Driver Awareness of Risks	C1 – Brief interventions regarding driving risks and consequences	Experimental	When teen driver receives a moving violation or is involved in a crash, health care provider conducts brief intervention with crash victim after crash (traumatic event) on driving risks and consequences
	C2 – Conduct peer-to-peer safety outreach	Moderate	Promote peer education of traffic safety through peer-to-peer outreach campaigns and contests to engage teens on teen driving risks and socially reinforced safe driving behaviors.

TABLE 3-5
Cross-Cutting Safety Strategy (Behavioral Strategy)

Objectives	Strategies	Effectiveness	Programs and Tactics
A – Improved Quality and Timeliness of Crash Data	A1 – Local and tribal enforcement use of Traffic and Criminal Software (TraCS)	Proven	Promote local and tribal enforcement full deployment of TraCS for in-the-field incident reporting and electronic submission of crash reports to the NDDOT.

TABLE 3-6
Speeding Strategies (Infrastructure Strategies)

Objectives	Strategies	Effectiveness	Cost to Implement and Operate ¹	Timeframe for Implementation ²
A – Set Appropriate Speed Limits	A1 – Install speed signage using variable message signs in school zones	Tried	Low	Medium
B – Communicate Appropriate Speeds through Use of Traffic Control Devices	B1 – Implement dynamic speed feedback signs, including dynamic message boards at rural to urban transitions	Tried	Low	Medium
	B2 – Use in-pavement measures to communicate the need to reduce speeds	Tried	Moderate	Short
C – Ensure that Roadway Supports Appropriate and Safe Speeds	C1 – Effect safe speed transitions through design elements and on approaches to lower-speed areas	Tried	High	Long
<p>Notes: ¹ Cost: Low = <\$100,000 per intersection; Moderate = \$100,000 to \$500,000 per intersection; High = >\$500,000 per intersection ² Implementation: Short = <1 year; Medium = 1 to 2 years; Long = >2 years Source: NCHRP Report 500 Series, 2004</p>				

TABLE 3-7
Lane Departure Strategies (Infrastructure Strategies)

Objectives	Strategies	Effectiveness	Cost to Implement and Operate ¹	Timeframe for Implementation ²
A – Keep Vehicles from Encroaching on the Roadside	A1 – Install edge rumble strips (shoulder or edge line)	Proven	Low	Short
	A2 – Install enhanced pavement markings, 6-inch edge line, or embedded wet-reflective pavement markings on section with narrow or no paved shoulders	Experimental/ Tried	Low	Short
	A3 – Provide enhanced shoulders, lighting, delineation (for example, Chevrons), or pavement markings for sharp horizontal curves	Tried / Proven	Low	Short
	A4 – Provide skid-resistance pavement surfaces	Proven	Moderate	Medium
	A5 – Apply shoulder treatments *Eliminate shoulder drop-offs *Safety edge *Widen and/or pave shoulders	Experimental/ Proven	Moderate	Medium
B – Minimize the Likelihood of Crashing into an Object or Overturning if the Vehicle Travels Off the Shoulder	B1 – Design safer slopes and ditches to prevent rollovers	Proven	Moderate to High	Medium
	B2 – Remove/relocate objects in hazardous locations	Proven	Moderate to High	Medium
C – Reduce the Severity of the Crash	C1 – Improve design and application of barrier and attenuation systems	Tried	Moderate to High	Medium
D – Keep Vehicles from Encroaching into Opposite Lane	D1 – Install centerline rumble strips for two-lane roads	Tried	Low	Short
	D2 – Reallocate total two-lane roadway width (lane and shoulder) to include a “buffer median”	Tried	Low	Medium
E – Minimize the Likelihood of Crashing into an Oncoming Vehicle	E1 – Use alternating passing lanes or four-lane sections at key locations (Swedish "2+1")	Tried	Moderate to High	Medium

Notes:

¹ Cost: Low = <\$10,000 per mile; Moderate = \$10,000 to \$100,000 per mile; High = >\$100,000 per mile

² Implementation: Short = <1 year; Medium = 1 to 2 years; Long = >2 years

Source: NCHRP Report 500 Series, 2003

TABLE 3-8
Signalized Intersection Strategies (Infrastructure Strategies)

Objectives	Strategies	Effectiveness	Cost to Implement and Operate ¹	Timeframe for Implementation ²
A – Reduce Frequency and Severity of Intersection Conflicts through Traffic Control and Operational Improvements	A1 – Optimize signal operation (phasing/timing, etc.)	Tried / Proven	Low	Short
	A2 – Optimize clearance intervals	Proven	Low	Short
	A3 – Employ signal coordination along a corridor or route	Proven	Low	Medium
	A4 – Employ emergency vehicle preemption	Proven	Moderate	Medium
B – Reduce Intersection Conflicts through Geometrics	B1 – Provide/improve left-turn channelization	Proven	Moderate	Long
C – Improve Pedestrian Safety with Signal Improvements	C1 – Install countdown timers	Tried	Low	Short
	C2 – Re-time signals to provide a leading pedestrian interval (advanced walk)	Tried	Low	Short
D – Improve Driver Awareness of Intersections and Signal Control	D2 – Improve visibility of signals (overhead indications, 12-inch lenses, background shields, LEDs) and signs (mast arm mounted street names) at intersections	Tried	Low	Short
E – Improve Driver Compliance with Traffic Control Devices	E1 – Supplement conventional enforcement of red-light running with confirmation lights; include a public information campaign to increase awareness and compliance	Tried	Low	Short
F – Improve Safety through other Infrastructure Treatments	F1 – Restrict or eliminate parking on intersection approaches	Proven	Low	Short

Notes:

¹ Cost: Low = <\$100,000 per intersection; Moderate = \$100,000 to \$500,000 per intersection; High = >\$500,000 per intersection

² Implementation: Short = <1 year; Medium = 1 to 2 years; Long = >2 years

Source: NCHRP Report 500 Series, 2004

TABLE 3-9
Unsignalized Intersection Strategies (Infrastructure Strategies)

Objectives	Strategies	Effectiveness	Cost to Implement and Operate ¹	Timeframe for Implementation ²
A – Reduce the Frequency and Severity of Intersection Conflicts through Geometric Design Improvements	A1 – Provide left-turn lanes at intersections	Proven	Moderate	Medium
	A2 – Provide offset turn lanes at intersections	Tried	Moderate to High	Medium
	A3 – Realign intersection approaches to reduce or eliminate intersection skew	Proven	High	Medium
	A4 – Improve pedestrian and bicycle facilities to reduce conflicts between motorists and nonmotorists	Varies	Moderate	Medium
	A5 – Use indirect left-turn treatments to minimize conflicts at divided highway intersections	Tried	Moderate	Medium
B – Improve Sight Distance at Unsignalized Intersections	B1 – Clear sight triangle on approaches and in medians by clearing grub, eliminating parking, etc.	Tried	Low	Short
C – Improve Driver Awareness of Intersections as Viewed from the Intersection Approach	C1 – Improve visibility of intersections by providing enhanced signing, delineation or pavement markings/messages (stop bar, larger regulatory signs, LED stop signs, etc.)	Tried	Low	Short
	C2 – Improve visibility of intersections by providing appropriate street lighting	Proven	Low to Moderate	Medium
	C3 – Install larger regulatory and warning signs at intersections, including the use of dynamic warning signs at appropriate intersections	Tried	Low t	Short
	C4 – Call attention to the intersection by installing rumble strips or splitter islands on intersection approaches	Tried	Low to Moderate	Medium
D – Appropriate Intersection Traffic Control to Minimize Crash Frequency and Severity	D1 – Construct roundabouts at appropriate locations	Proven	High	Long
<p>Notes: ¹ Cost: Low = <\$50,000 per intersection; Moderate = \$50,000 to \$500,000 per intersection; High = >\$500,000 per intersection ² Implementation: Short = <1 year; Medium = 1 to 2 years; Long = >2 years Source: NCHRP <i>Report 500</i> Series, 2003</p>				

TABLE 3-10
 Urban Segment Strategies (Infrastructure Strategies)

Objectives	Strategies	Effectiveness	Cost to Implement and Operate ¹	Timeframe for Implementation ²
A – Include Pedestrian and Bicycle Accommodations	A1 – Install sidewalks in appropriate locations	Proven	Moderate to High	Medium
	A2 – Minimize pedestrian crossing distances using curb extensions or median islands	Proven	Low	Medium
B – Improve Roadway Configuration to Accommodate Left Turns	B1 – Restripe roadway to a three-lane (road diet) or five-lane cross section	Proven	Low	Medium
C – Improve Access Management Near Intersections	C1 – Restrict or eliminate turning maneuvers by providing channelization or closing median openings	Tried	Low	Short
	C2 – Restrict access to properties using driveway closures or turn restrictions	Tried	Low	Medium
	C3 – Restrict cross-median access near intersections	Tried	Low	Medium
Notes: ¹ Cost: Low = <\$50,000 per intersection; Moderate = \$50,000 to \$500,000 per intersection; High = >\$500,000 per intersection ² Implementation: Short = <1 year; Medium = 1 to 2 years; Long = >2 years Source: NCHRP <i>Report 500</i> Series, 2003				

TABLE 3-11
Heavy Truck Safety Strategies (Behavioral Strategies)

Objectives	Strategies	Effectiveness	Programs and Tactics
A – Improve Driver Skills	A1 – Promote heavy truck driver training and education	Proven	Promote and disseminate information to commercial employers, independent operators/drivers, farmers and farming cooperatives about available driver training courses through the NDDOT, North Dakota Motor Carriers Association, North Dakota Local Technical Assistance Program, Federal Motor Carrier Safety Administration, and other training providers.
	A2 – Expand locally available commercial driver license (CDL) instructors and training Schools.	Proven	Expand the availability of CDL instructors and schools. Course content should cover topics included in the North Dakota Drivers License Division CDL Manual (available at local Drivers License Office and online at www.dot.nd.gov). Currently, one approved North Dakota CDL driver training school (www.nitalaska.com).
B – Strengthen Employer Driver Safety Initiatives Development	B1 – Promote development and reinforcement of employer driver safety policies and programs	Tried	Encourage employers to establish traffic safety policies with clear consequences – recognition for compliance and sanctions for failure to comply. Incorporate research results (for example, National Institute for Occupational Safety and Health (NIOSH) Center for Motor Vehicle Safety, North Dakota State University (NDSU) Upper Great Plains Transportation Institute, etc.) to support safe and effective work organization, hours of work, and driver fatigue polices and program interventions to prevent work-related motor vehicle crashes.
	B2 – Promote use of in-vehicle teen safety technology	Experimental	To help reduce and eliminate commercial driver distractions and high-risk driving maneuvers (excessive speed, and swerves) promote the use of in-vehicle monitoring devices for employer coaching. Promote post-crash driver coaching using safety technology data.
C – Strengthen Public Awareness of Safe Driving	C1 – Promote “Share The Road” outreach to public using cooperative agency/industry/academic delivery	Tried	Conduct public outreach on safe driving of passenger vehicles around heavy trucks through cooperative delivery methods with safety partners including: ND Highway Patrol – Motor Carriers Division, ND Motor Carriers Association, ND FMCSA, local high schools and colleges, and other safety stakeholders.
D – Enhance Safety through Enhanced Enforcement	D1 – Conduct enhanced enforcement of aggressive passenger vehicles	Proven	Analyze crash data to define high-risk locations for enhanced enforcement and public outreach efforts. Examine roadways with added enforcement where speed limits have been reduced. Conduct a multi-agency, multi-squad car enforcement effort. Agencies work in collaboration to provide data-driven, saturated, high-visibility enforcement at high-risk speed corridors/roadways coupled with media outreach.
	D2 – Conduct high-visibility enforcement of heavy trucks	Proven	Analyze crash data to define high-risk speed locations for enhanced enforcement and public outreach efforts. Examine roadways with added enforcement where speed limits have been reduced. Conduct a multi-agency, multi-squad car enforcement effort. Agencies work in collaboration to provide high-visibility enforcement at high-risk speed corridors/roadways coupled with media outreach.
Sources: NCHRP Report 500 Series (2004), NIOSH Center for Motor Vehicle Safety: Strategic Plan for Research and Prevention, 2014-2018 (2014), and various other resources			

TABLE 3-12
Heavy Truck Safety Strategies (Infrastructure Strategies)

Objectives	Strategies	Effectiveness	Cost to Implement and Operate ¹	Timeframe for Implementation ²
A – Keep Vehicles from Encroaching on the Roadside	A1 – Install edge rumble strips (shoulder or edge line)	Proven	Low	Short
	A2 – Install enhanced pavement markings, 6-inch edge line, or embedded wet-reflective pavement markings on section with narrow or no paved shoulders	Experimental/ Tried	Low	Short
	A3 – Provide enhanced shoulders, lighting, delineation (for example, Chevrons), or pavement markings for sharp horizontal curves	Tried / Proven	Low	Short
	A4 – Provide skid-resistance pavement surfaces	Proven	Moderate	Medium
	A5 – Apply shoulder treatments *Eliminate shoulder drop-offs *Safety edge *Widen and/or pave shoulders	Experimental/ Proven	Moderate	Medium
B – Minimize the Likelihood of Crashing into an Object or Overturning if the Vehicle Travels off the Shoulder	B1 – Design safer slopes and ditches to prevent rollovers	Proven	Moderate to High	Medium
	B2 – Remove/relocate objects in hazardous locations	Proven	Moderate to High	Medium
C – Minimize the Likelihood of Crashing into an Oncoming Vehicle	C1 – Use center buffers, alternating passing lanes or four-lane sections at key locations (Swedish “2+1”)	Tried	Moderate to High	Medium
	C2 – Install centerline rumble strips for two-lane roads	Tried	Low	Short
	C3 – Use climbing lanes at steep grades	Tried	Moderate to High	Medium
D – Reduce the Frequency and Severity of Intersection Conflicts	D1 – Provide turn lanes at intersections	Proven	Moderate	Medium
	D2 – Widen intersection to accommodate truck turn path to eliminate encroachment	Varies	Moderate	Medium
	D3 – Improve visibility of intersections by providing appropriate street lighting	Proven	Low to Moderate	Medium
	D4 – Install intersection dynamic warning systems	Tried	Low	Short
<p>Notes: ¹ Cost: Low = <\$10,000 per mile; Moderate = \$10,000 to \$100,000 per mile; High = >\$100,000 per mile ² Implementation: Short = <1 year; Medium = 1 to 2 years; Long = >2 years Source: NCHRP Report 500 Series, 2004</p>				

3.3 Safety Strategies Workshop

Two Safety Planning Workshops were held as part of the LRSP Phase 3 analysis. The June 4, 2014 meeting in Dickinson included representatives from six counties and the Mandan, Hidatsa, and Arikara (MHA) Nation in the southwestern region. The June 5, 2014 meeting in Williston included representatives from five counties and the City of Williston in the northwestern region. The primary focus of the safety workshops was to discuss and prioritize the safety strategies.

The basic workshop structure included introductions and an overview of the current NDDOT safety program. This was followed by local speakers. Becky Byzewski (Safe Communities Program), Fahtima Finley (MHA Nation), and Capt. Eldon Mehrer (Motor Carriers Division North Dakota Highway Patrol) shared information on local safety initiatives and programs in the southern portion of the western region. Sgt. Jamie Huschka (North Dakota Highway Patrol), Capt. Eldon Mehrer (Motor Carriers Division North Dakota Highway Patrol), and Chief Arthur Walgren (Watford City Police Department) shared information on local safety initiatives and programs in the northern portion of the western region. The morning concluded with a review of the latest crash data on the local roadway system. In the afternoon, the workshop participants discussed potential safety strategies and began the process of prioritizing the strategies. The groups reviewed and discussed driver-behavior and roadway infrastructure strategies. The final agenda item was a voting exercise in which each participant voted for their preferred strategies as a way to focus future efforts for the local roadway programs in their region.

Workshop participants included county, city and tribal road safety engineering, enforcement, and education representatives; elected official representatives from the North Dakota Governor's Office and the North Dakota Senate; North Dakota State University (NDSU); federal road safety staff; and NDDOT staff in order to include a variety of backgrounds and experiences to enable valuable interaction and discussions during the workshop.

3.4 Prioritizing Safety Strategies

Through the group (infrastructure and driver behavior) discussions and voting exercises, the top safety strategies for the western region are:

- **Behavioral strategies**
 - Speed: Identify high-risk speed locations/corridors for enhanced enforcement
 - Young Drivers: Encourage driver education providers (local schools and private providers) to require parent education component
- **Infrastructure strategies**
 - Lane Departure: Install edge rumble strips (shoulder or edge line)
 - Unsignalized Intersection: Provide left-turn lanes at intersections
 - Unsignalized Intersection: Install larger regulatory and warning signs at intersections, including the use of dynamic warning signs at appropriate intersections
 - Heavy Truck: Provide turn lanes at intersections

- Heavy Truck: Install enhanced pavement markings, 6-inch edge line, or embedded wet-reflective pavement markings on section with narrow or no paved shoulders
- Signalized Intersections: Install countdown timers

Infrastructure safety projects that are developed as part of this LRSP are considered eligible for funding through the state’s Highway Safety Improvement Program (HSIP). The managers of this program have identified implementation cost and effectiveness as priorities in their evaluation process of selecting projects for funding. Low-cost projects allow the limited funding to support a wider deployment and the use of proven-effective strategies provides the highest level of confidence that a given project will result in an overall crash reduction.

The ability of the selected strategies to reduce crashes is based on information in the FHWA’s Crash Modification Factors (CMF) Clearinghouse and other published research. Table 3-13 provides a summary for driver behavior strategies reviewed in Chapter 5 of this report. In addition, Table 3-13 provides a summary of the crash reduction factors that were found in the CMF Clearinghouse for infrastructure safety strategies considered and/or suggested for the western region, along with an estimated unit cost for each strategy. Most factors reported are based on research that was assigned higher-quality ratings.

TABLE 3-13
Proposed Strategies, Crash Reduction Factors, and Typical Installation Costs

Strategy	Crash Reduction Factor ^a	Typical Installation Costs
Impaired Driving		
Support community programs for alternative transportation	Up to 15% reduction in alcohol-related crashes	Low to moderate, depending on fares and tavern contributions
Promote sobriety initiatives for DUI offenders	Varies, depending on the program structure	
Educate and enforce zero tolerance laws for drivers under age 21	Up to 30% reduction when highly publicized	Up to \$50 per hour of officer overtime
Speeding and Aggressive Driving		
Conduct high-visibility targeted enforcement of speeding and aggressive driving	3%	Up to \$50 per hour of officer overtime
Young Drivers		
Encourage driver education providers to require parent education component	2%	\$1,500 per school district
Seat Belt Use		
Enforce secondary seat belt use law	3% to 5% increase in seat belt use; depending on intensity of enforcement	Up to \$50 per hour of officer overtime
Pursue local support for primary seat belt law	Up to a 9% increase in seat belt use after a state law is passed	Low to moderate
Rural Segments		
4-inch latex edge line		\$1,320 per mile
4-inch latex centerline		\$660 per mile
6-inch latex edge line	10% to 45% all rural serious crashes	\$1,980 per mile
Shoulder or edge line rumble strips	20% run off road crashes	\$5,850 per mile

TABLE 3-13
Proposed Strategies, Crash Reduction Factors, and Typical Installation Costs

Strategy	Crash Reduction Factor ^a	Typical Installation Costs
Ground in wet-reflective markings		\$36,000 per mile
Centerline rumble strips	40% head-on/sideswipe-crashes	\$3,600 per mile
6-inch centerline		\$1,020 per mile
Rural Curves		
Chevrons	20% to 30%	\$3,960 per curve
Arrow board only		\$1,200 per curve
Advance warning sign and advisory speed plaque		\$1,440 per curve
2-foot paved shoulder and shoulder rumble strips	20% to 30% run-off-the-road crashes	\$54,400 per mile +\$5,850 per mile
Rural Intersections		
Roundabout	20% to 50% all crashes/ 60% to 90% right-angle crashes	\$4,200,000 per intersection
Directional median (RCI or J-Turn)	17% all crashes/ 100% angle crashes	\$1,080,000 per intersection
Mainline dynamic warning sign	50% all crashes/ 75% serious right-angle crashes	\$60,000 per intersection
Close median		\$30,000 per intersection
Intersection lighting	25% to 40% nighttime crashes	\$10,200 per streetlight
Upgrade signs and pavement markings	40% upgrade of all signs and pavement markings/ 15% for STOP AHEAD pavement marking	\$2,640 per approach ^b
Clear sight triangle	37% serious injury crashes ^c	\$2,940 per intersection ^d
Urban		
Conversions (three-lane/five-lane)	30% to 50%	\$48,000 per mile [three-lane] \$54,000 per mile [five-lane] +\$36,000 per signalized intersection for updates (for example, loop and signal head placement)
Access management	5% to 31%	\$360,000 per mile ^e
Signal – confirmation lights	25% to 84% reduction in violations	\$1,200 per two approaches
Pedestrian/bicycle – advanced walk	Up to 60% pedestrian/vehicle crashes	\$600 per intersection
Pedestrian/bicycle – countdown timers	25% vehicle/pedestrian crashes	\$12,000 per intersection
Pedestrian/bicycle – curb extensions	Increase in vehicles yielding to pedestrians	\$36,000 per corner
Pedestrian/bicycle – median refuge island	46% in vehicle/pedestrian crashes	\$24,000 per approach

TABLE 3-13
 Proposed Strategies, Crash Reduction Factors, and Typical Installation Costs

Strategy	Crash Reduction Factor ^a	Typical Installation Costs
<p>Notes:</p> <p>^a Crash reduction factors based on review of CMF Clearinghouse and other published research</p> <p>^b Includes \$540 per STOP sign, \$540 per junction sign assembly, \$600 per STOP AHEAD sign, \$600 per STOP AHEAD pavement marking message, and \$360 per stop bar</p> <p>^c Reduction based on increasing sight distance triangle</p> <p>^d Inclusive of sign upgrades identified and materials and labor for clearing of sight triangle.</p> <p>^e For management of unsignalized intersection movements within a corridor that has a divided median. Typical project may include minor street diverters, signed turn restrictions, and median closings.</p> <p>N/A = not applicable</p>		

4.0 Western Region Infrastructure Safety Projects

4.1 Western Region Proactive Project Decision Process

The primary objectives of the LRSP effort are to identify low-cost, safety-related infrastructure projects focused on each county's documented safety emphasis areas and target crash types. These emphasis areas account for the greatest number of serious crashes occurring on the local road system. Mitigating the factors that contribute to these crashes will assist each county in reducing serious crashes on the local road system.

Projects were developed that include identifying a specific improvement at a specific location based on risk factors described in Chapter 2 and the high-priority safety strategies described in Chapter 3. Improvement strategies are consistent with the NDDOT's SHSP with a focus on proven effectiveness at reducing the target crash type and low cost of implementation. Proven-effective strategies give safety program managers the highest level of confidence that the deployment will result in a reduction of crashes. Low-cost strategies allow improvements to be widely deployed across a system to address the low density of crashes and are less expensive than complete reconstruction of high-risk locations. Project development and mitigation focused on the following improvements:

- **Rural**
 - Lane-departure crashes along roadway segments and in curves
 - Intersection-related crashes
- **Urban**
 - Rear-end and head-on crashes on roadway segments
 - Angle crashes and pedestrian and bicycle crashes at intersections

As described in Chapter 2, heavy vehicles crashes are a priority for the western region and the NDDOT will take the lead in addressing these crashes since the majority occurred on state highways. Of the severe crashes involving heavy vehicles on the local road system, the predominant crash types in the western region suggest that the systemic projects for county roads and city streets effectively address these crashes. Therefore, agencies may refer to the suggested infrastructure countermeasures for at-risk locations for heavy vehicle crashes.

For consistency across the western region, project decision trees were created so that locations with similar characteristics across the region received the same suggested mitigation treatment. Projects were chosen based on the identification of at-risk locations and the availability of proven strategies for crash reduction. This resulted in a systemic focus on rural paved roadway segments, horizontal paved curves, and rural intersections. In cities with populations over 5,000, the focus was on arterial and collector roadway segments and intersections along these segments. Projects were originally suggested based on the technical analysis and then revised in accordance with input from the local agencies and the NDDOT.

High-priority rural roadway segment projects focused on addressing the most common type of serious segment-related crash – a single-vehicle, lane-departure crash – by implementing road edge improvements to alert drivers when they are drifting too far along the road edge (Figure 4-1).

High-priority rural curve projects focused on enhancing the curve delineation to improve the driver’s ability to successfully navigate the curves (Figure 4-2). As shown in the figure, a curve is eligible for a safety improvement project in three ways.

High-priority rural intersection projects (Figure 4-3) focused on addressing the most common type of serious intersection crash – a right-angle collision – by making the intersection more visible to drivers and by reducing the number of intersection conflicts. Examples of suggested projects are shown in Figure 4-4.

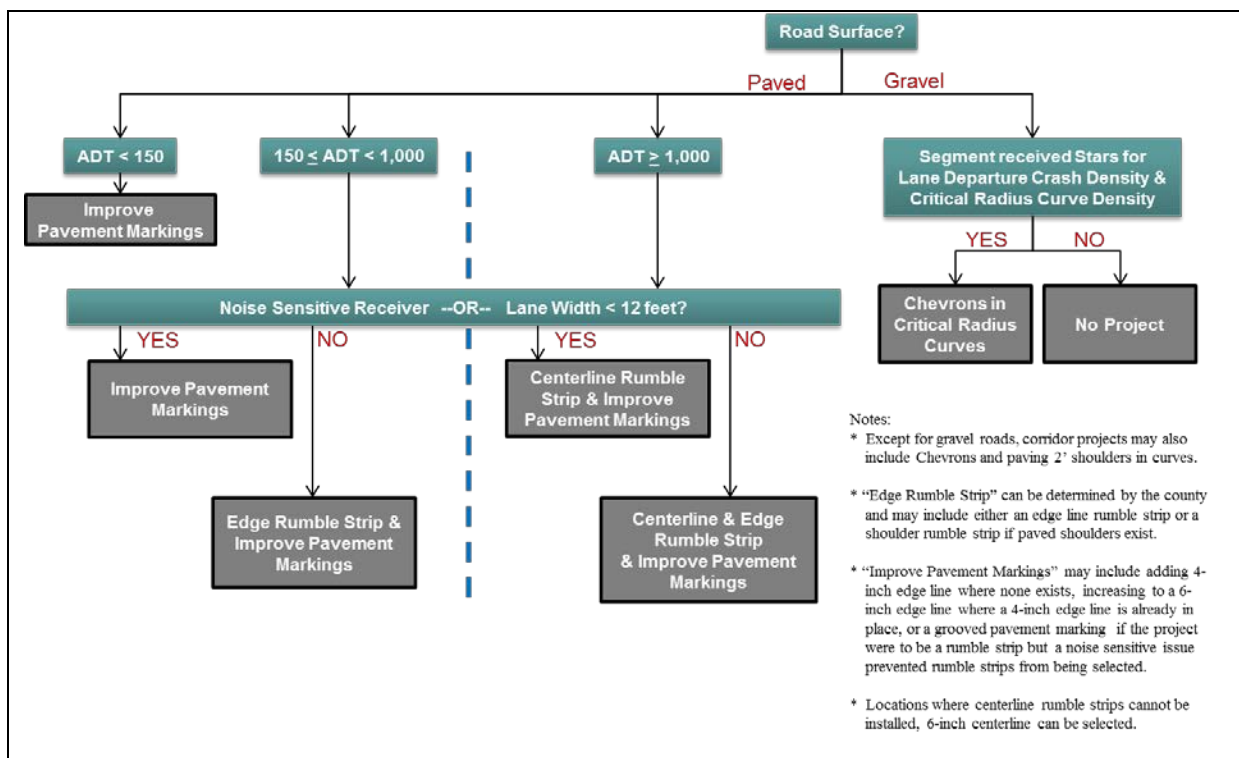


FIGURE 4-1
 High-Priority Rural Roadway Segment Project Decision Tree

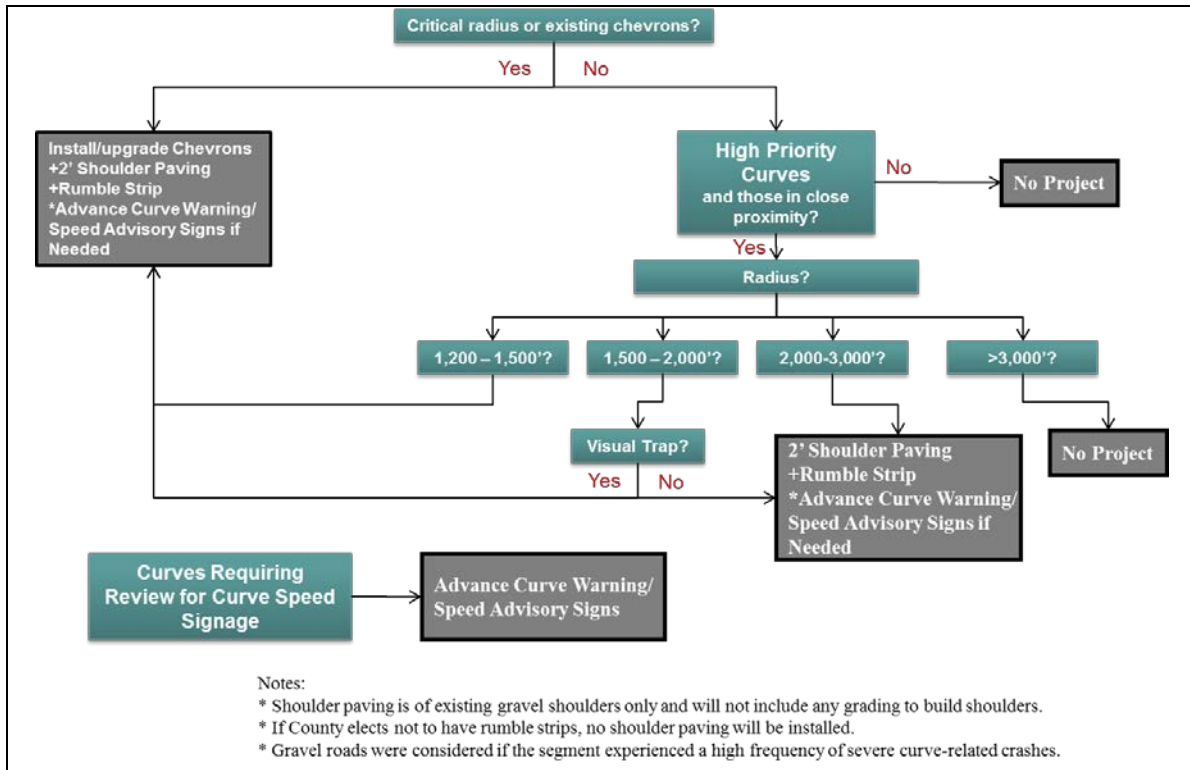


FIGURE 4-2 High-Priority Rural Curve Project Decision Tree

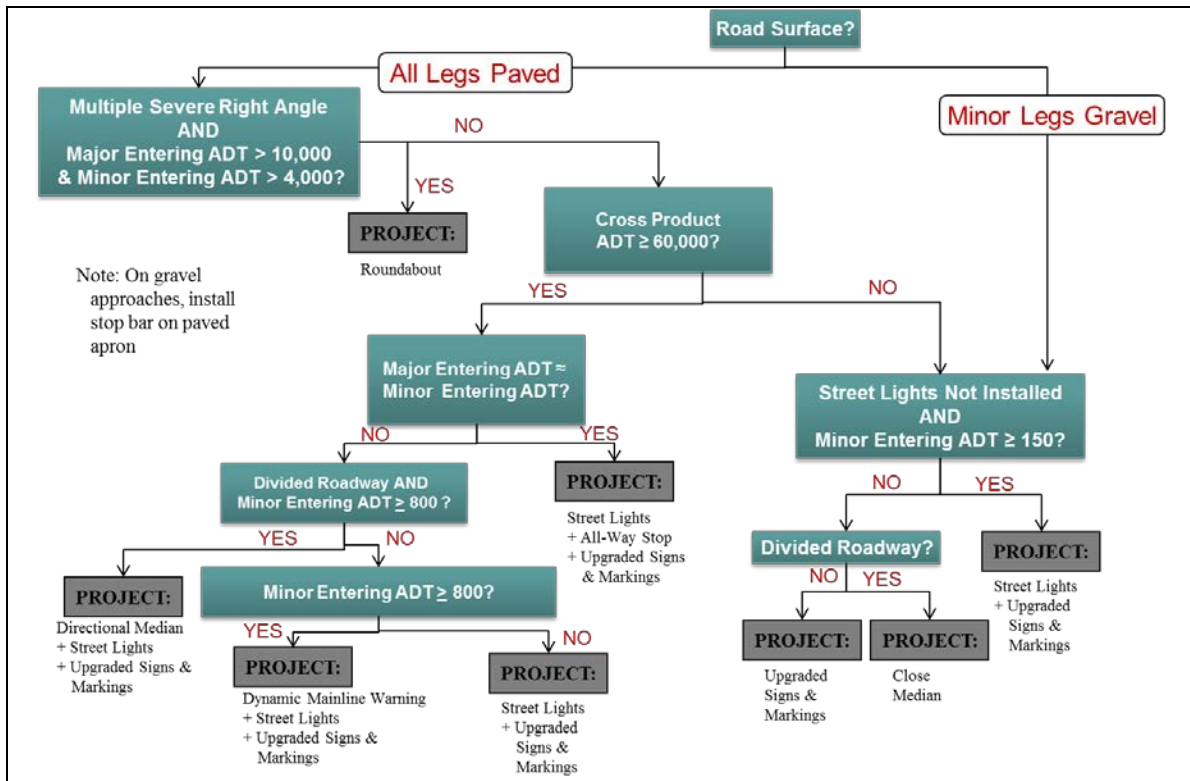


FIGURE 4-3 High-Priority Rural Intersection Project Decision Tree

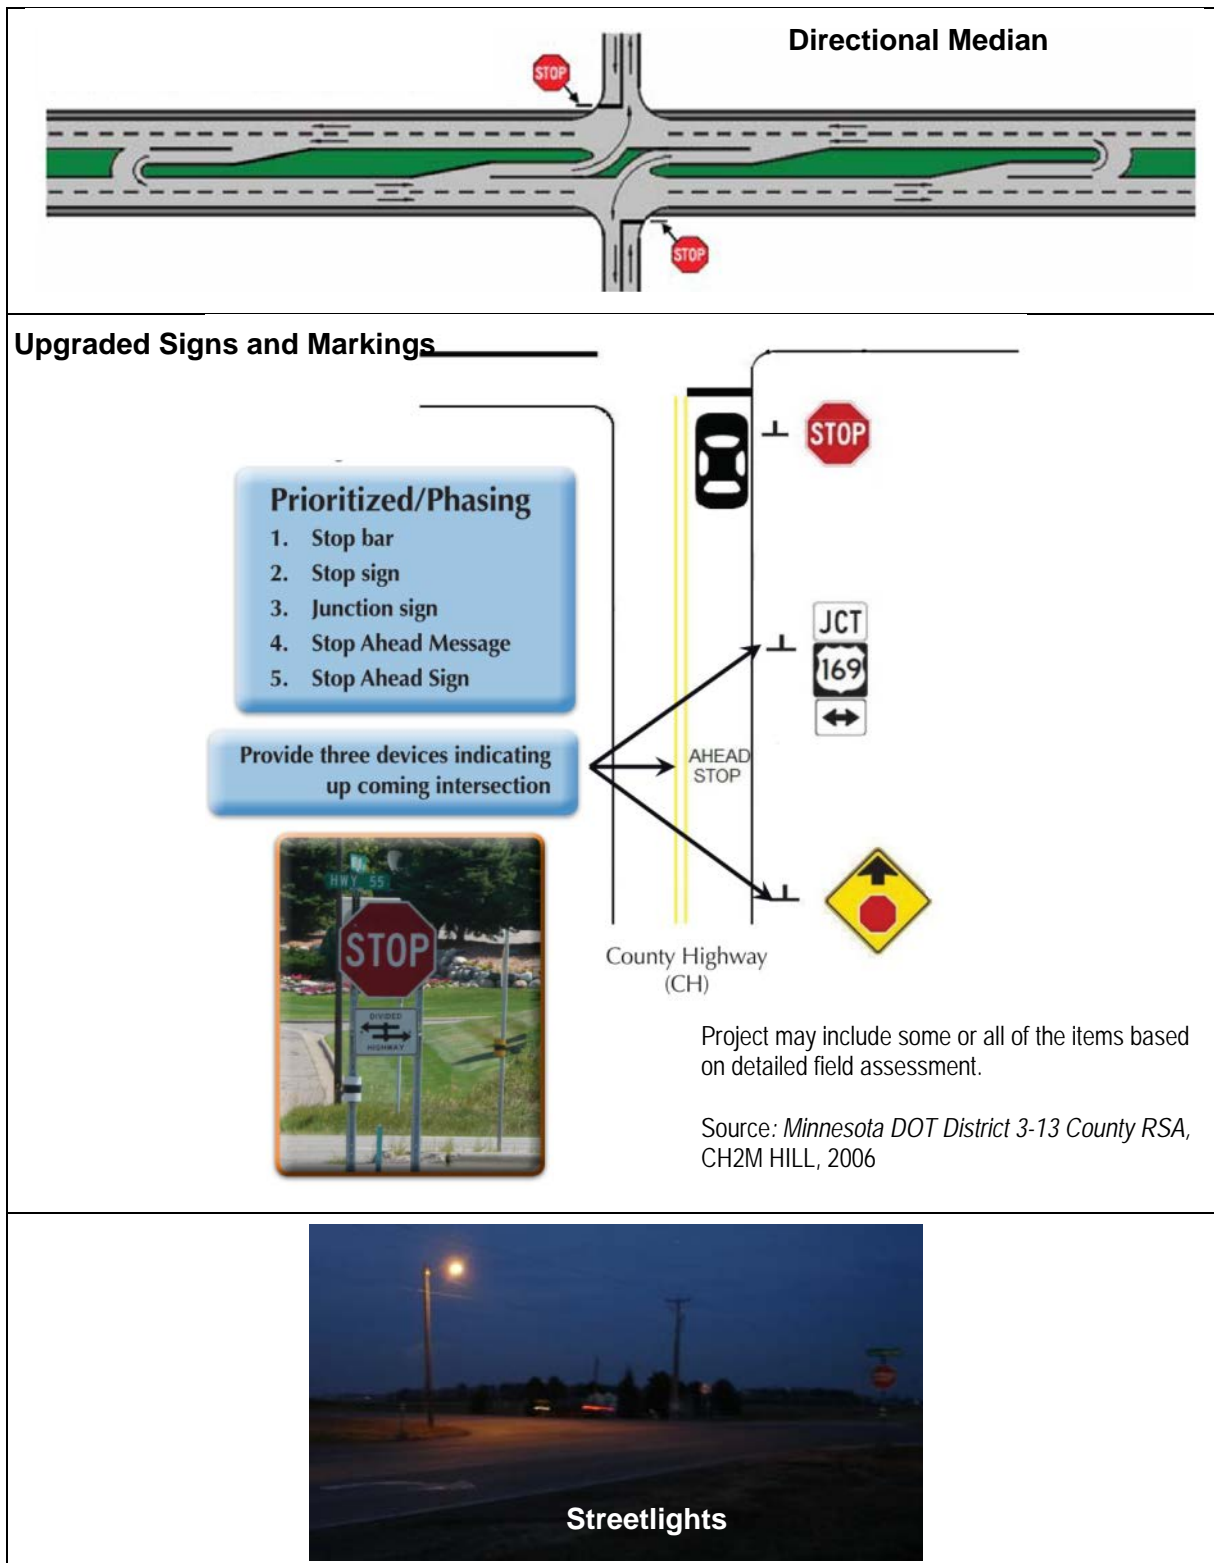


FIGURE 4-4
 Intersection Safety Strategies Considered for Deployment

High-priority urban roadway segment projects focused on reducing rear-end and head-on crashes by creating buffer space in the middle of the roadway. This buffer space would be created by converting to a three-lane or five-lane roadway and by better managing access along divided arterials (Figure 4-5).

High-priority urban right-angle intersection projects focused on reducing right-angle crashes by reducing red-light running and managing access to reduce the number of conflict points along a corridor, particularly at signalized intersections (Figure 4-6).

High-priority urban pedestrian and bicycle intersection projects focused on reducing pedestrian and bicycle crashes by providing shorter crossing distances, curb extensions or median refuge islands, as well as advanced walk intervals and countdown timers at signalized intersections (Figure 4-7).

Project forms were completed for each high-priority intersection, curve, and roadway segment, including a description of the location, brief crash history, ranking factors, and the identified safety strategy. These forms were formatted so they could be submitted directly through the HSIP process, but may require supplemental information for the evaluation and scoring process.

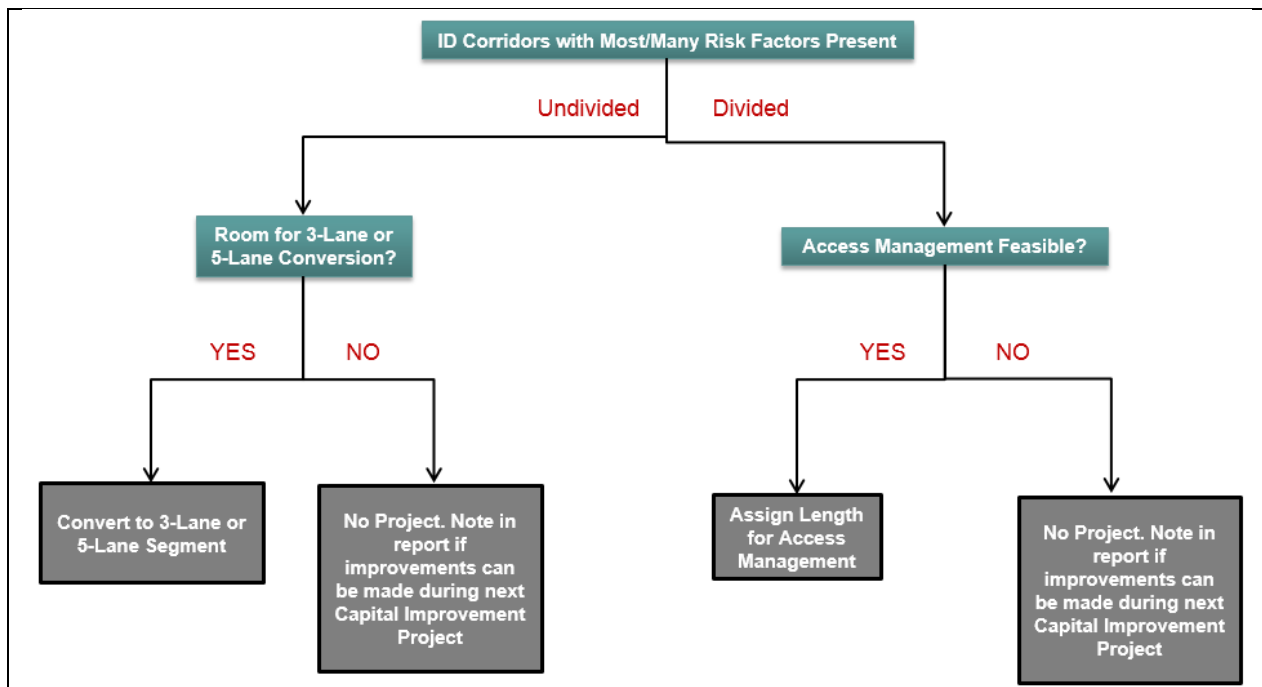


FIGURE 4-5
 High-Priority Urban Roadway Segment (Turning) Project Decision Tree

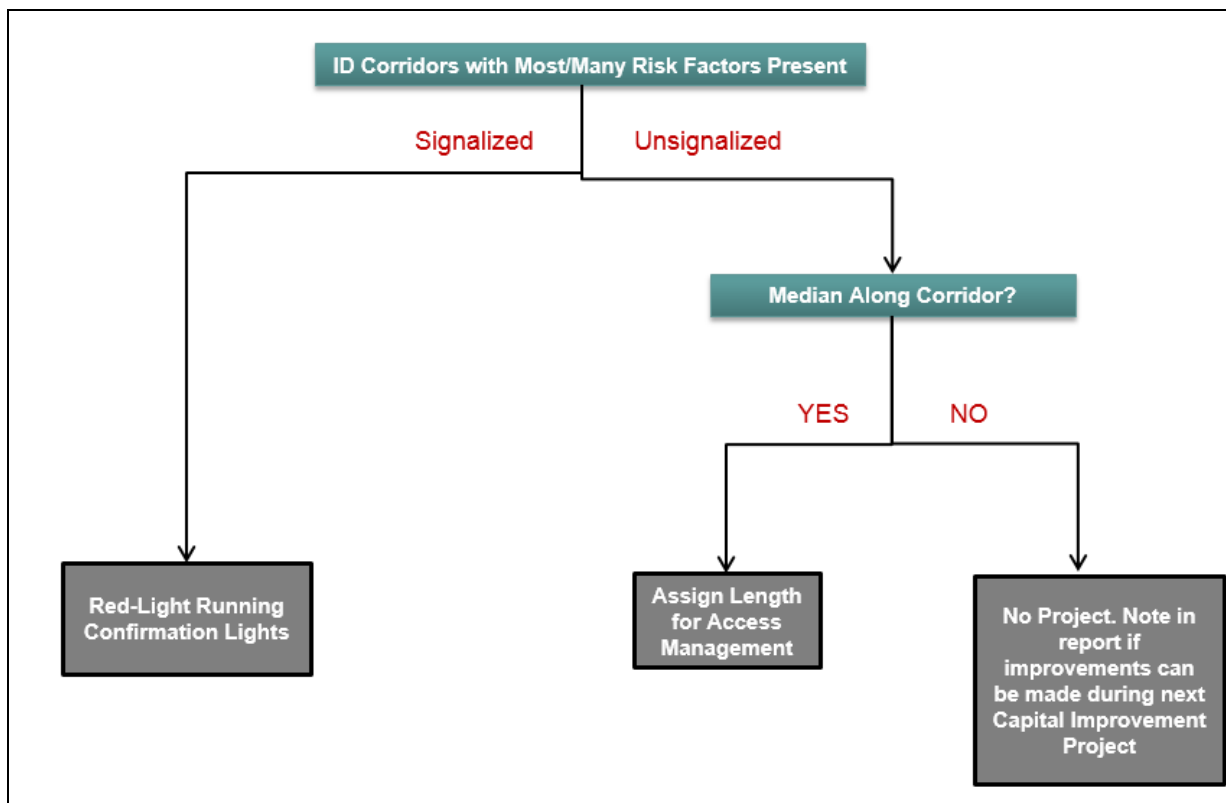


FIGURE 4-6
 High-Priority Urban Right-Angle Intersection (Signalized) Project Decision Tree

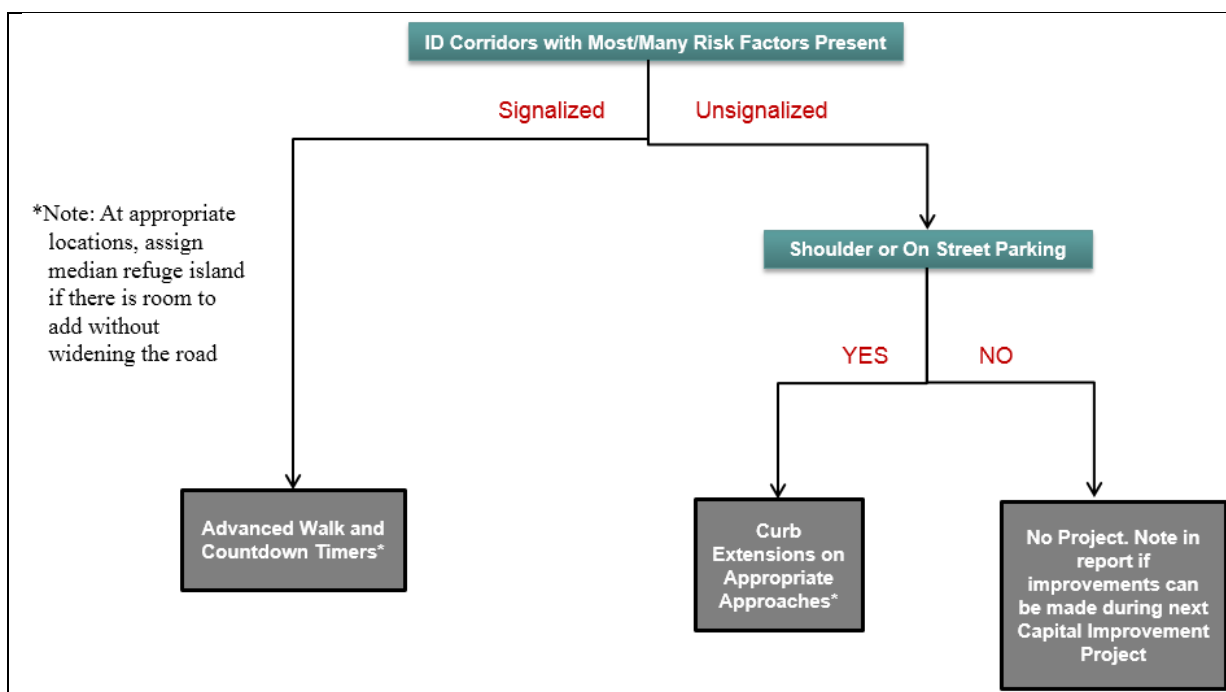


FIGURE 4-7
 High-Priority Urban Pedestrian and Bicyclist Intersection Project Decision Tree

The suggested low-cost safety projects for the western region are described in the following sections. The costs assigned to each project are planning level estimates and do not include right-of-way or some other supplemental costs such as signal revisions or replacement for three-lane conversion projects. Because of funding limitations, all potential projects would not be completed in 1 year. The actual schedule for implementing individual projects will necessitate securing funding from the state’s HSIP. The safety planning process followed for the western region is consistent with the North Dakota SHSP. In addition, several of the high-priority safety strategies are among those recommended for the state road system in the state’s SHSP.

It is not expected or required that each county or city pursue safety projects in the suggested ranking order. The ranking suggests general priorities, given that actual project development decisions will be made by each county or city staff based on economic, social, and political issues and in coordination with other pavement and reconstruction projects that are part of the county’s Capital Improvement Program.

Many project details are still undetermined, including general project termini. Each county or city will determine specific project details (such as termini and exceptions) as decisions regarding implementation of specific projects are made. These decisions may require that the county coordinate with various municipal departments, the public, and other county transportation departments.

The total cost of projects suggested for the western region is \$16,180,361. A cost breakout by project type and county/city is provided in Table 4-1.

TABLE 4-1
Western Region Total Safety Project Costs

Rural Projects	Roadway Segments	Intersections	Curves	Total
Adams County	\$69,471	\$84,960	\$65,733	\$220,164
Billings County	\$54,332	\$84,360	\$90,438	\$229,130
Bowman County	\$77,652	\$148,560	\$181,957	\$408,169
Burke County	\$33,488	\$94,200	\$18,651	\$146,339
Divide County	\$82,719	\$142,200	\$16,355	\$241,274
Dunn County	\$89,973	\$330,360	\$42,660	\$462,993
Golden Valley County	\$36,060	\$27,720	\$21,240	\$85,020
Grant County	\$0	\$75,240	\$96,480	\$171,720
Hettinger County	\$82,345	\$59,520	\$18,752	\$160,616
McKenzie County	\$187,125	\$647,760	\$111,235	\$946,120
McLean County	\$140,181	\$3,485,940	\$49,221	\$3,675,343
Mercer County	\$366,048	\$300,720	\$119,618	\$786,386
Mountrail County	\$51,084	\$2,679,780	\$24,141	\$2,755,005
Renville County	\$163,800	\$65,880	\$137,187	\$366,867
Slope County	\$7,605	\$31,200	\$22,107	\$60,912
Stark County	\$504,203	\$375,180	\$57,701	\$937,085
Williams County	\$316,395	\$1,626,780	\$205,197	\$2,148,372
Theodore Roosevelt National Park	\$125,700	\$13,320	\$0	\$139,020
Urban Projects	Roadway Segments	Intersections – Right-Angle	Intersections – Pedestrians and Bicyclists	Total
City of Dickinson	\$632,667	\$8,400	\$558,000	\$1,199,067
City of Williston	\$596,160	\$6,000	\$438,600	\$1,040,760

Adams County

The total project cost suggested for Adams County is \$220.164. The project cost breakout for intersection, roadway segment, and curve projects are listed in Table 4-2. High-priority locations that received a project are shown in Figure 4-8. These locations are described in further detail in Appendix: Adams County, along with priority rankings and suggested project sheets.

TABLE 4-2
 Adams County Project Costs

Project Type	Cost
Intersections	\$84,960
Roadway Segments	\$69,471
Curves	\$65,733
Total	\$220,164

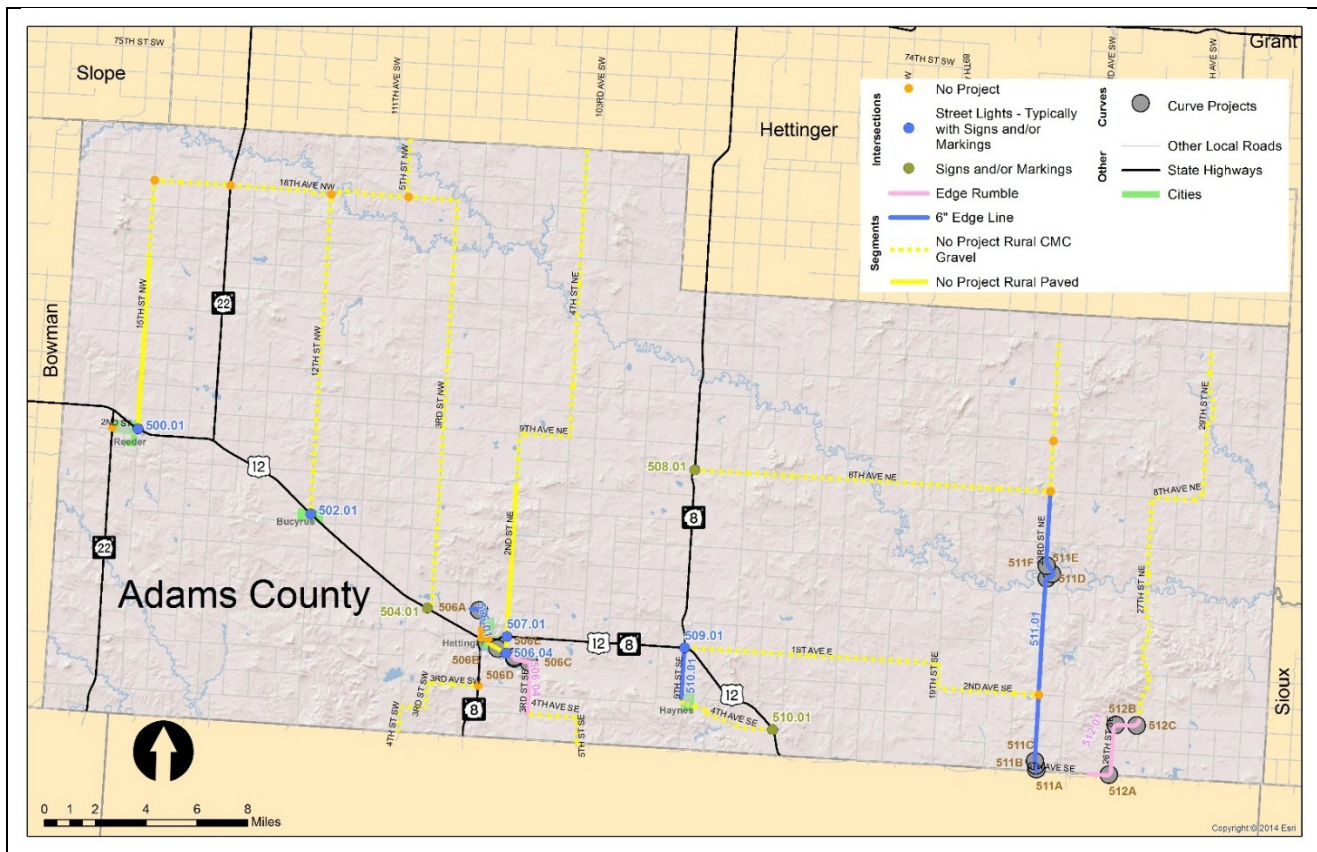


FIGURE 4-8
 Adams County Project Locations Map

Billings County

The total project cost suggested for Billings County is \$229,130. The project cost breakout for intersection, roadway segment, and curve projects are listed in Table 4-3. High-priority locations that received a project are shown in Figure 4-9. These locations are described in further detail in Appendix: Billings County, along with priority rankings and suggested project sheets.

TABLE 4-3
Billings County Project Costs

Project Type	Cost
Intersections	\$84,360
Roadway Segments	\$54,332
Curves	\$90,438
Total	\$229,130

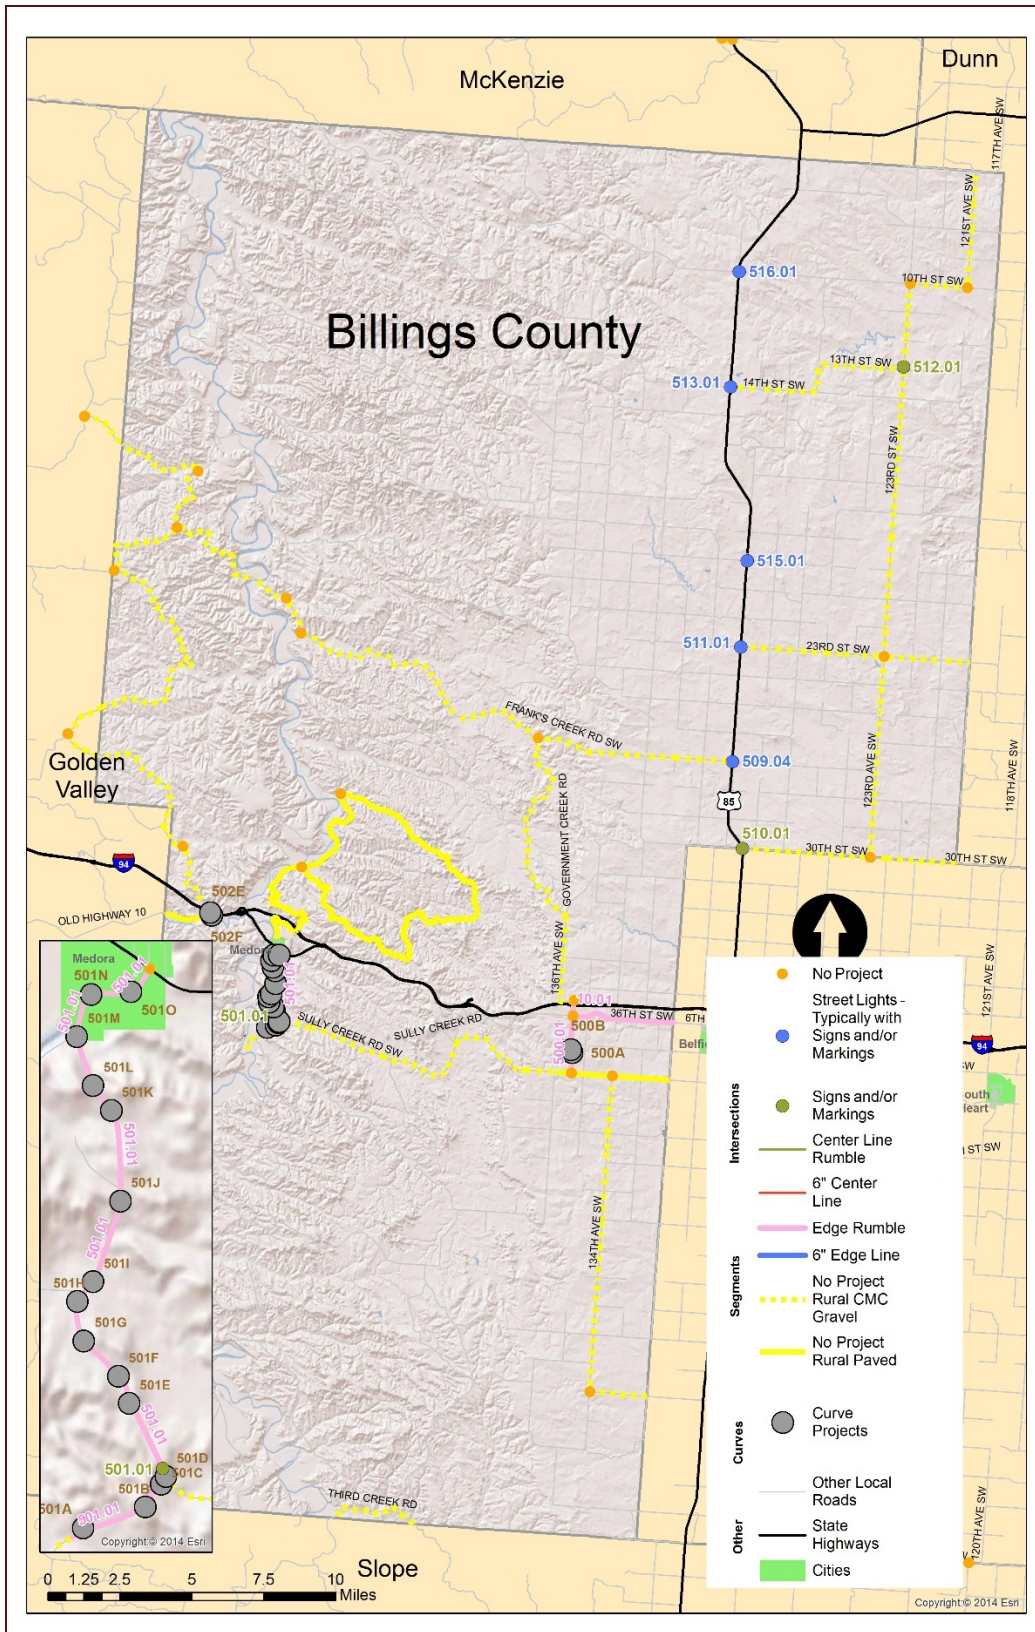


FIGURE 4-9
 Billings County Projects Location Map

Bowman County

The total project cost suggested for Bowman County is \$408,169. The project cost breakout for intersection, roadway segment, and curve projects are listed in Table 4-4. High-priority locations that received a project are shown in Figure 4-10. These locations are described in further detail in Appendix: Bowman County, along with priority rankings and suggested project sheets.

TABLE 4-4
 Bowman County Project Costs

Project Type	Cost
Intersections	\$148,560
Roadway Segments	\$77,652
Curves	\$181,957
Total	\$408,169

One roadway segment identified as a high-priority location did not receive projects. Half of this segment is located within the city limits of Bowman and is an urban designed roadway where rural projects would not apply. The remaining portion of the roadway segment was too short to be considered for a corridor project (Table 4-5).

TABLE 4-5
 Bowman County Priority Roadway Segment Locations without Suggested Treatments

Segment ID	Local Name	Segment Start	Segment End	Location Notes
508.01	11th Avenue NW	US 12	6th Street NW	Short segment – removed from consideration

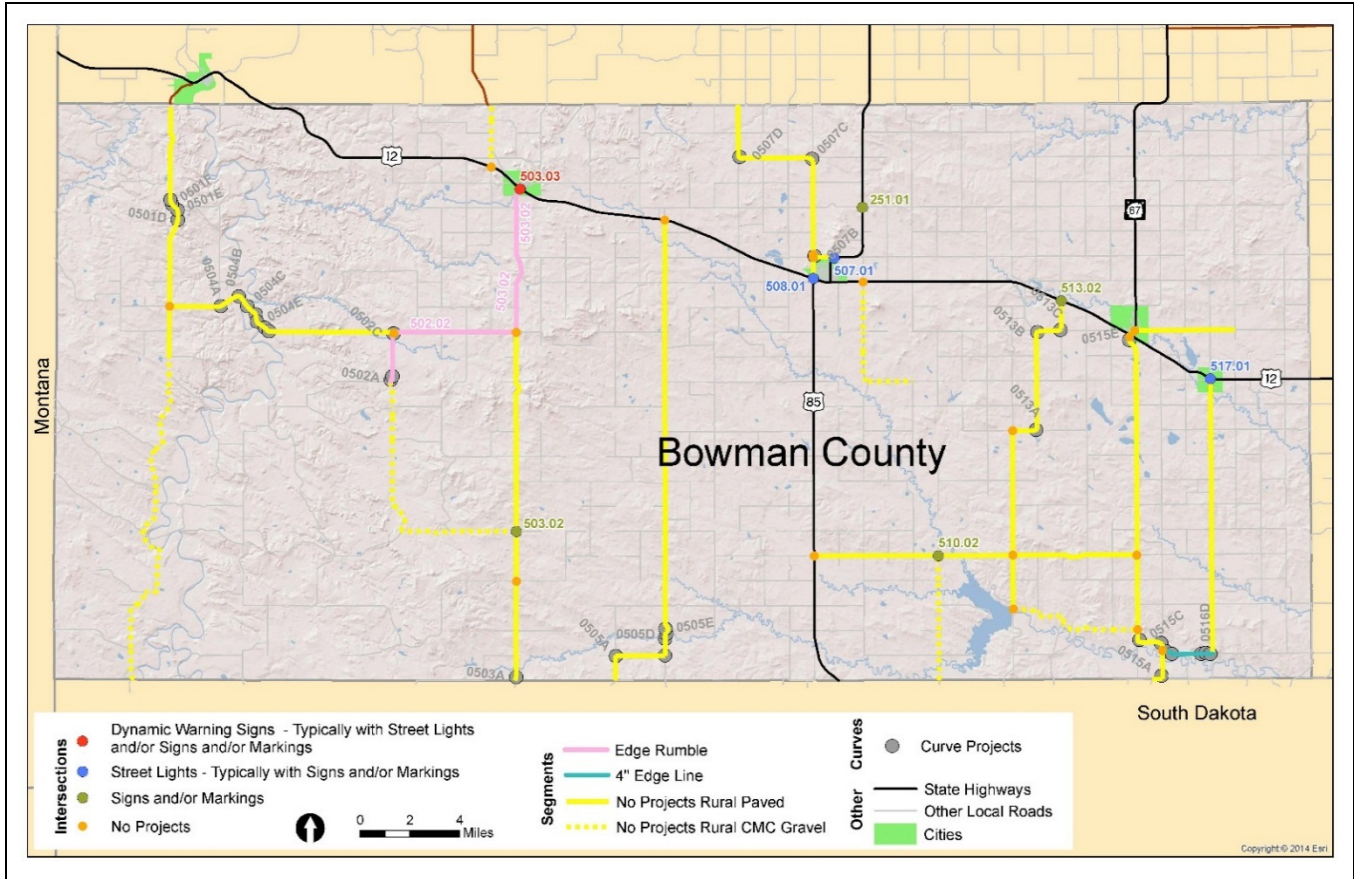


FIGURE 4-10
 Bowman County Project Locations Map

Burke County

The total project cost suggested for Burke County is \$146,339. The project cost breakout for intersection, roadway segment, and curve projects are listed in Table 4-6. High-priority locations that received a project are shown in Figure 4-11. These locations are described in further detail in Appendix: Burke County, along with priority rankings and suggested project sheets.

TABLE 4-6
 Burke County Project Costs

Project Type	Cost
Intersections	\$94,200
Roadway Segments	\$33,488
Curves	\$18,651
Total	\$146,339

Two roadway segments identified as high-priority locations did not receive projects. These roadway segments were recently rehabilitated under the oil county project; therefore, no projects were suggested since these new treatments reduce lane-departure crashes (Table 4-7).

TABLE 4-7
 Burke County Priority Roadway Segment Locations without Suggested Treatments

Segment ID	Local Name	Segment Start	Segment End	Location Notes
17.01	69th Avenue NW/ 93rd Street NW/ 70th Avenue NW	Burke/Ward County Line	ND 8/Main Street	Edge rumble projects constructed as part of oil county projects
11.01	88th Avenue NW/ Kings Highway/ 86th Avenue NW/ 85th Avenue NW	ND 50/ 79th Street NW	Burke 8/ 94th Street NW	Edge rumble projects constructed as part of oil county projects

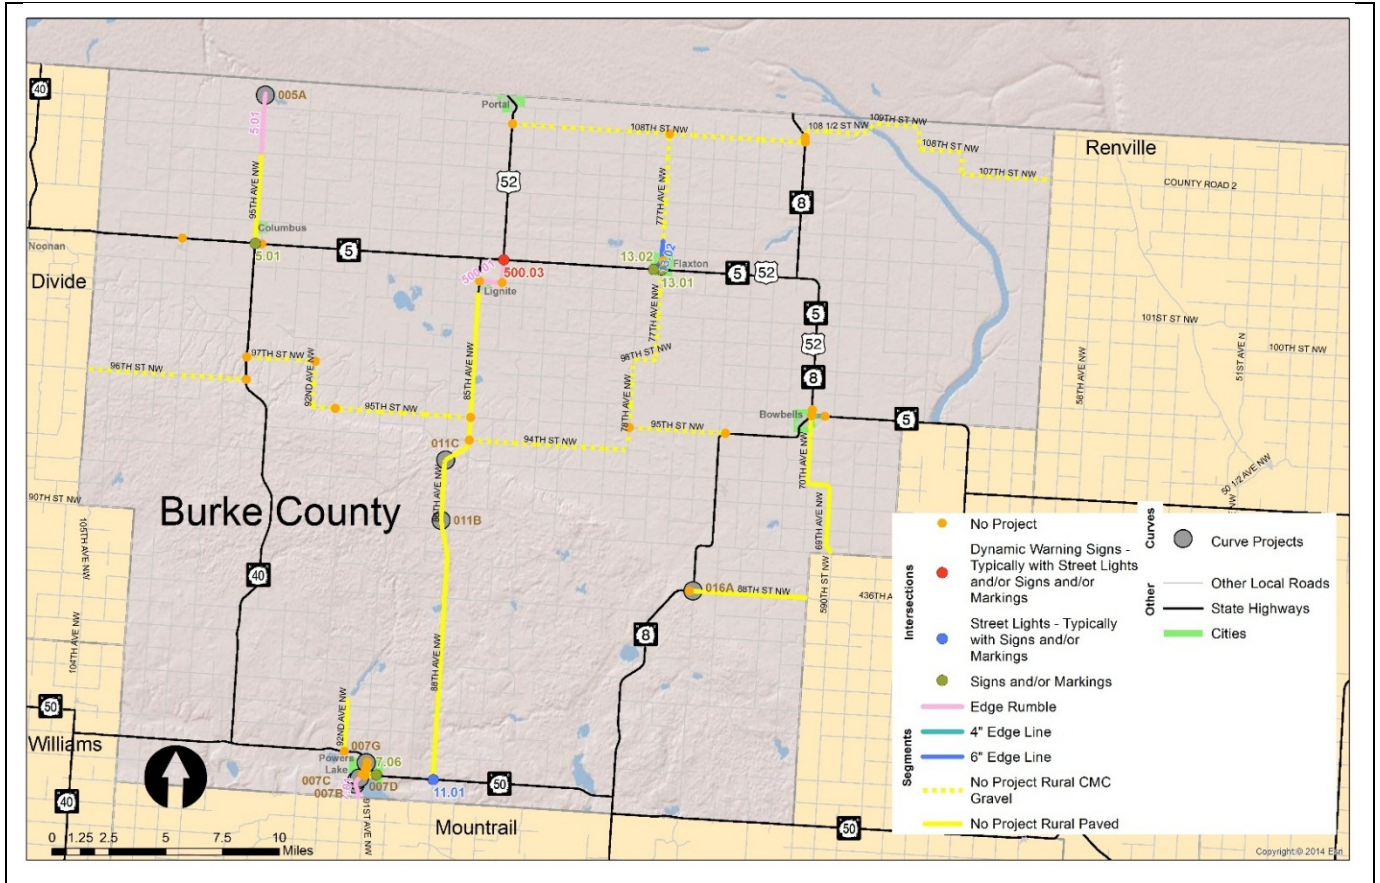


FIGURE 4-11
 Burke County Project Locations Map

Divide County

The total project cost suggested for Divide County is \$241,274. The project cost breakout for intersection, roadway segment, and curve projects are listed in Table 4-8. High-priority locations that received a project are shown in Figure 4-12. These locations are described in further detail in Appendix: Divide County, along with priority rankings and suggested project sheets.

TABLE 4-8
 Divide County Project Costs

Project Type	Cost
Intersections	\$142,200
Roadway Segments	\$82,719
Curves	\$16,355
Total	\$241,274

One roadway segment identified as a high-priority location did not receive a project. This roadway segment was recently rehabilitated under the oil county project; therefore, no project was suggested since this new treatment reduces lane-departure crashes (Table 4-9).

TABLE 4-9
 Divide County Priority Roadway Segment Locations without Suggested Treatments

Segment ID	Local Name	Segment Start	Segment End	Locations Notes
3.01	153rd Avenue NW/ 152nd Avenue NW	Montana/North Dakota State Line	97th Street NW	Edge rumble projects constructed as part of oil county projects

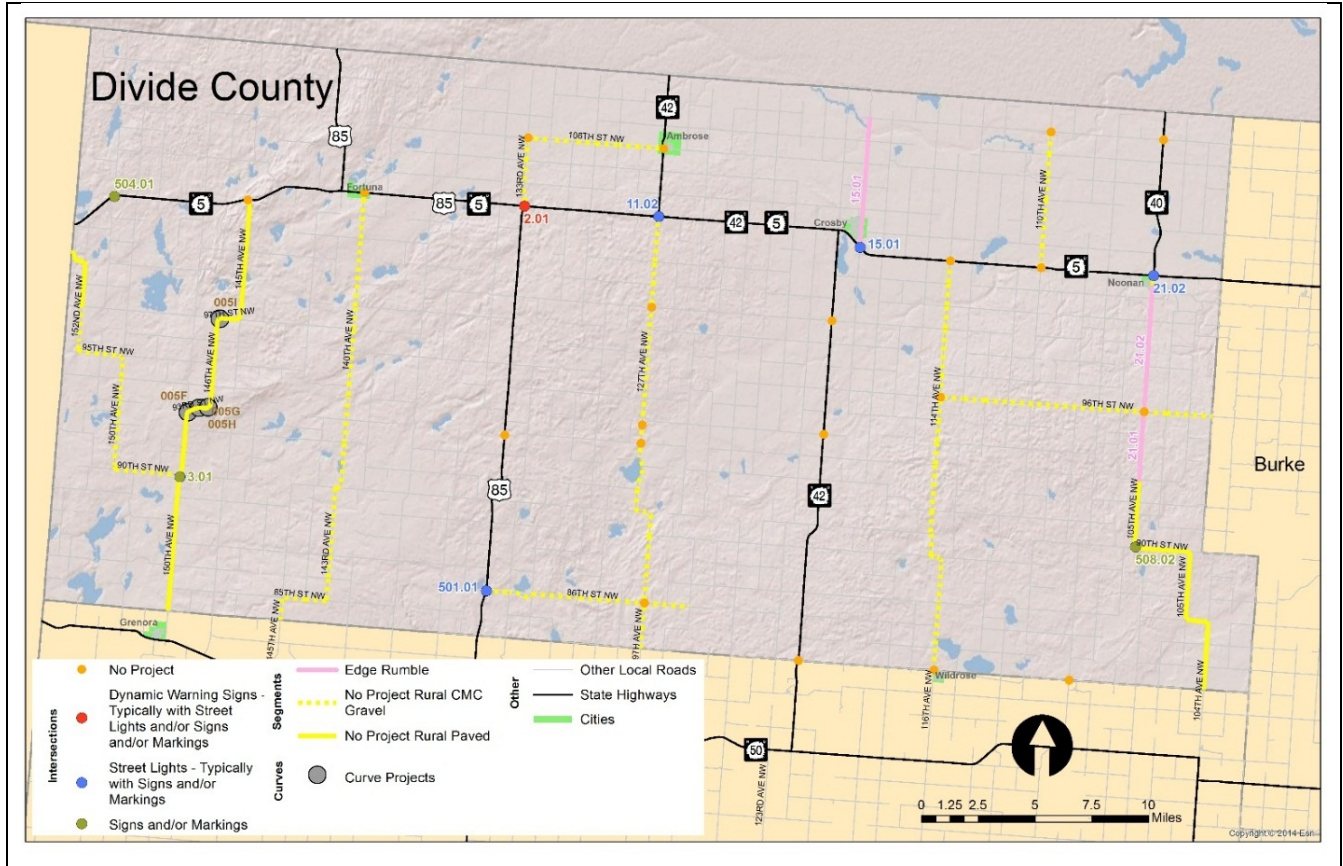


FIGURE 4-12
 Divide County Project Locations Map

Dunn County

The total project cost suggested for Dunn County is \$462,993. The project cost breakout for intersection, roadway segment, and curve projects are listed in Table 4-10. High-priority locations that received a project are shown in Figure 4-13. These locations are described in further detail in Appendix: Dunn County, along with priority rankings and suggested project sheets.

TABLE 4-10
 Dunn County Project Costs

Project Type	Cost
Intersections	\$330,360
Roadway Segments	\$89,973
Curves	\$42,660
Total	\$462,993

One roadway segment identified as a high-priority location did not receive projects. The paved portion of this segment is approximately 0.85 mile before it becomes gravel. Due to the lack of paved roadway along this corridor, this roadway segment was removed from project consideration (Table 4-11).

TABLE 4-11
 Dunn County Priority Roadway Segment Locations without Suggested Treatments

Segment ID	Local Name	Segment Start	Segment End	Location Notes
510.02	12th Street NW	109th Avenue SW	ND 22	Short segment – removed from consideration

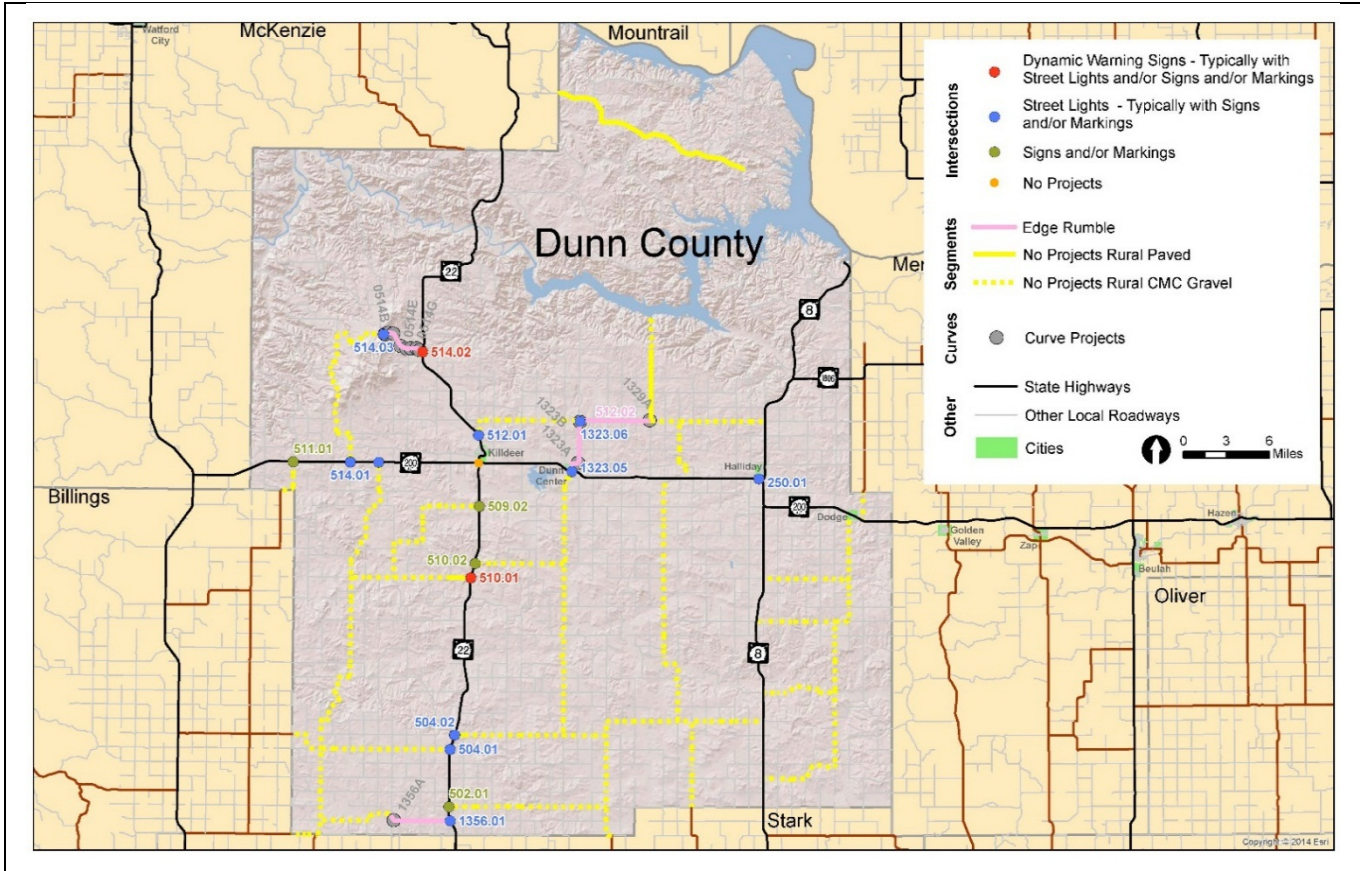


FIGURE 4-13
 Dunn County Project Locations Map

Golden Valley County

The total project cost suggested for Golden Valley County is \$85,020. The project cost breakout for intersection, roadway segment, and curve projects are listed in Table 4-12. High-priority locations that received a project are shown in Figure 4-14. These locations are described in further detail in Appendix: Golden Valley County, along with priority rankings and suggested project sheets.

TABLE 4-12
 Golden Valley County Project Costs

Project Type	Cost
Intersections	\$27,720
Roadway Segments	\$36,060
Curves	\$21,240
Total	\$85,020

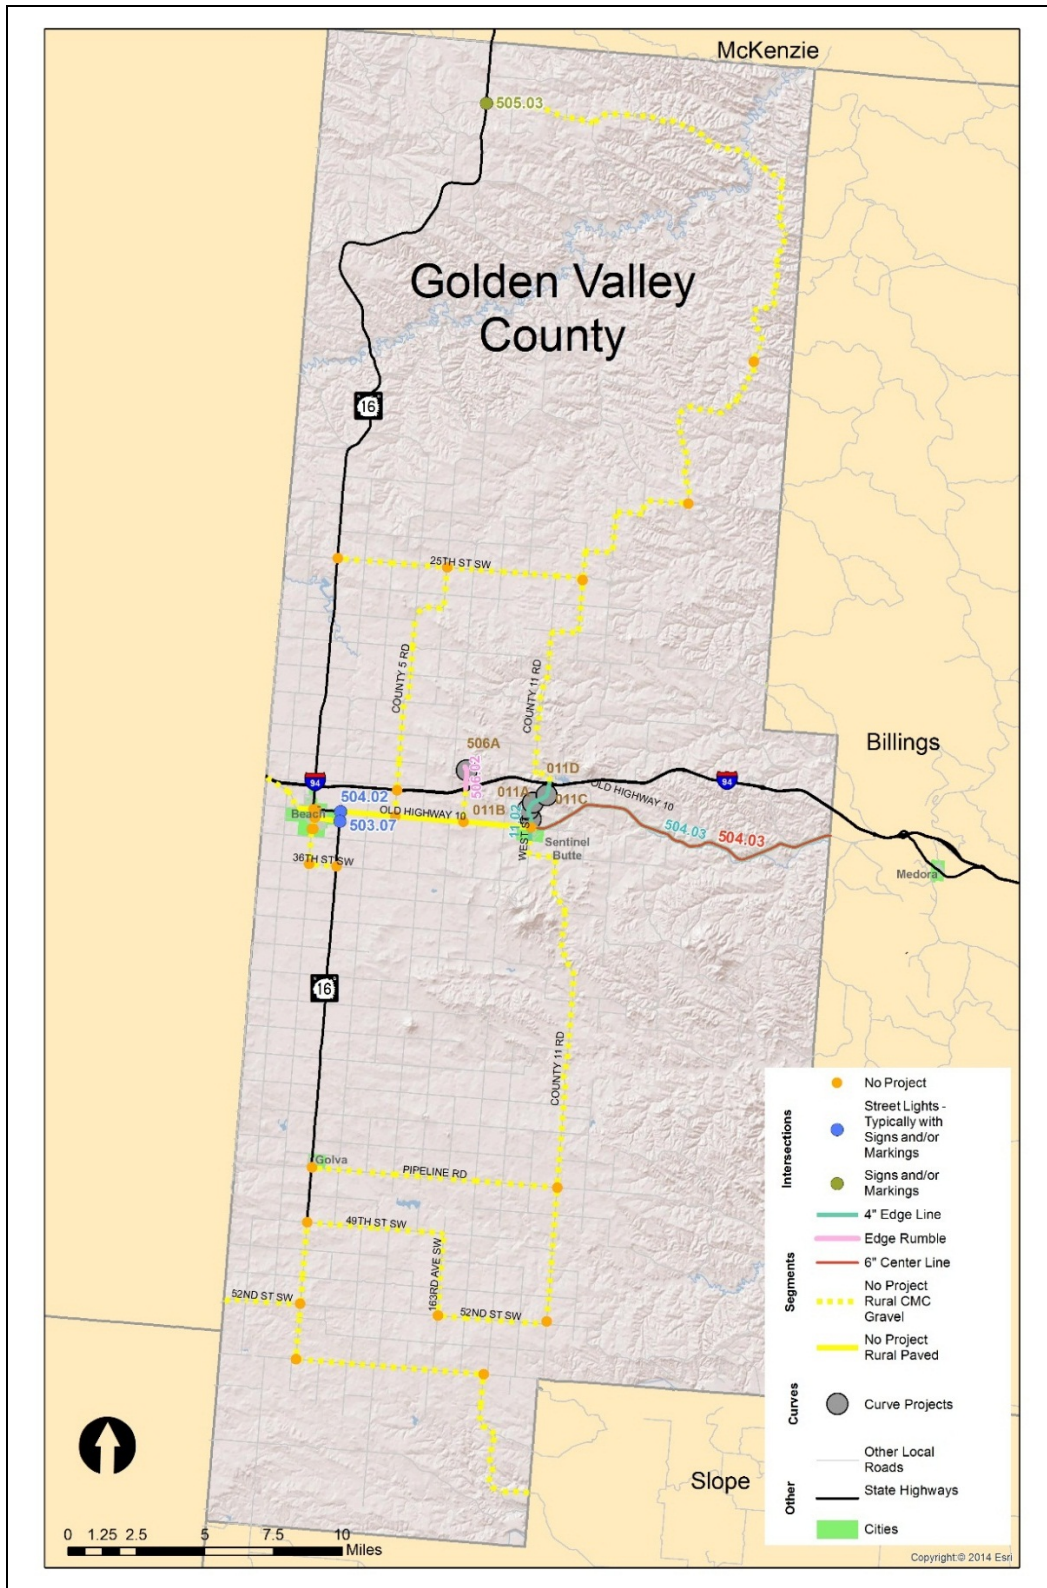


FIGURE 4-14
 Golden Valley County Project Locations Map

Grant County

The total project cost suggested for Grant County is \$171,720. The project cost breakout for intersection, roadway segment, and curve projects are listed in Table 4-13. High-priority locations that received a project are shown in Figure 4-15. These locations are described in further detail in Appendix: Grant County, along with priority rankings and suggested project sheets.

TABLE 4-13
 Grant County Project Costs

Project Type	Cost
Intersections	\$75,240
Roadway Segments	\$0
Curves	\$96,480
Total	\$171,720

One roadway segment identified as a high-priority location did not receive projects. The majority of this segment is located within the city limits of Carson and is an urban designed roadway where rural projects would not apply. The remaining portion of the roadway segment was too short to be considered for a corridor project (Table 4-14).

TABLE 4-14
 Grant County Priority Roadway Segment Locations without Suggested Treatments

Segment ID	Local Name	Segment Start	Segment End	Location Notes
503.03	55th Avenue SW/ Idaho Street	4th Avenue/ Minnesota Street	ND 21	Short segment – removed from consideration

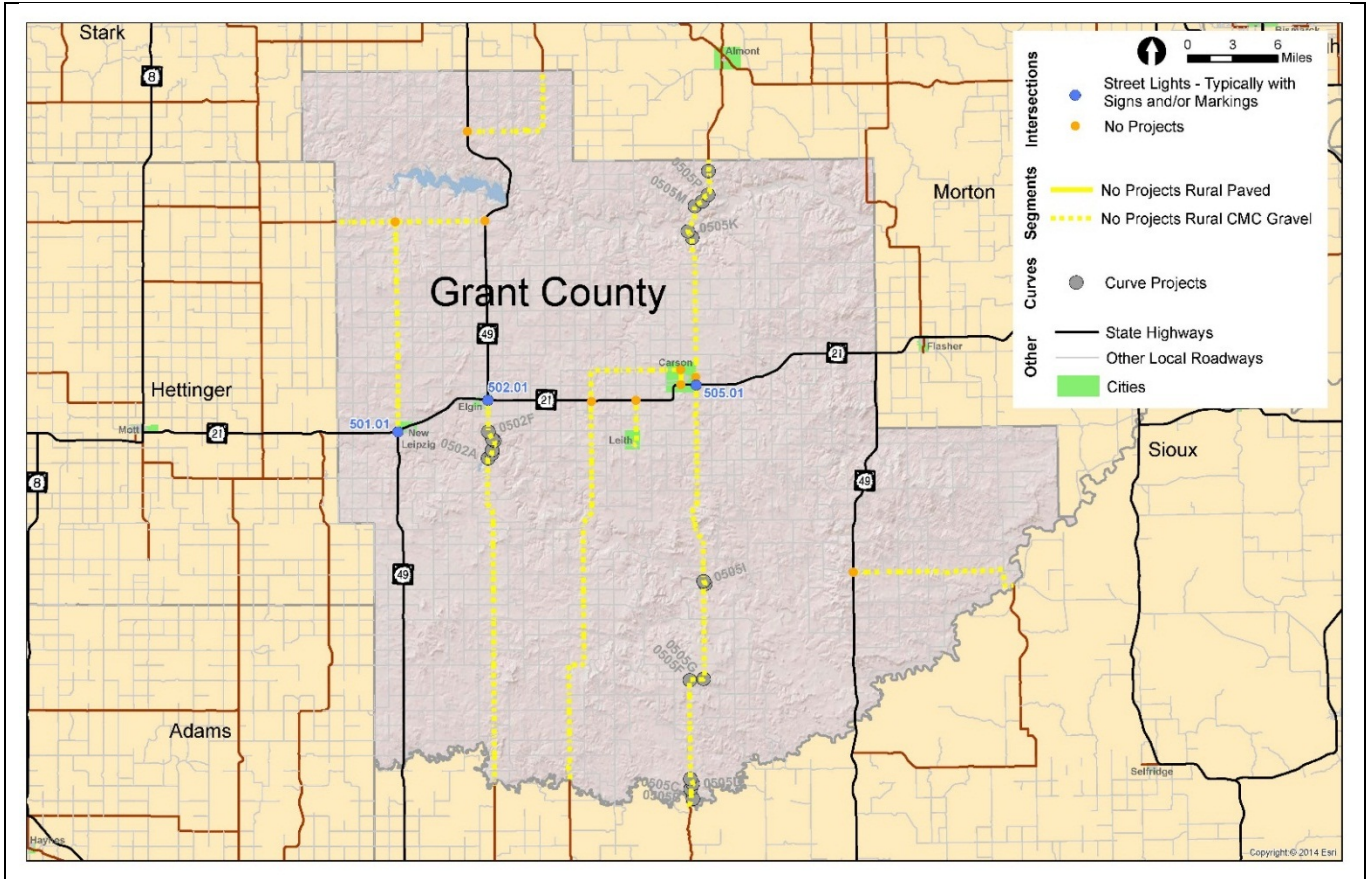


FIGURE 4-15
 Grant County Project Locations Map

Hettinger County

The total project cost suggested for Hettinger County \$160,616. The project cost breakout for intersection, roadway segment, and curve projects are listed in Table 4-15. High-priority locations that received a project are shown in Figure 4-16. These locations are described in further detail in Appendix: Hettinger County, along with priority rankings and suggested project sheets.

TABLE 4-15
 Hettinger County Project Costs

Project Type	Cost
Intersections	\$59,520
Roadway Segments	\$82,345
Curves	\$18,752
Total	\$160,616

Two roadway segments identified as high-priority locations did not receive projects. These segments are predominately located within the city limits of New England and are urban designed roadways where rural projects would not apply. The portions of these roadway segments outside of city jurisdiction were too short to be considered for corridor projects (Table 4-16).

TABLE 4-16
 Hettinger County Priority Roadway Segment Locations without Suggested Treatments

Segment ID	Local Name	Segment Start	Segment End	Location Notes
509.02	12th Street	Main Street	ND 22	Short segment – removed from consideration
509.01	Main Street	ND 21	W 12th Street	Short segment – removed from consideration

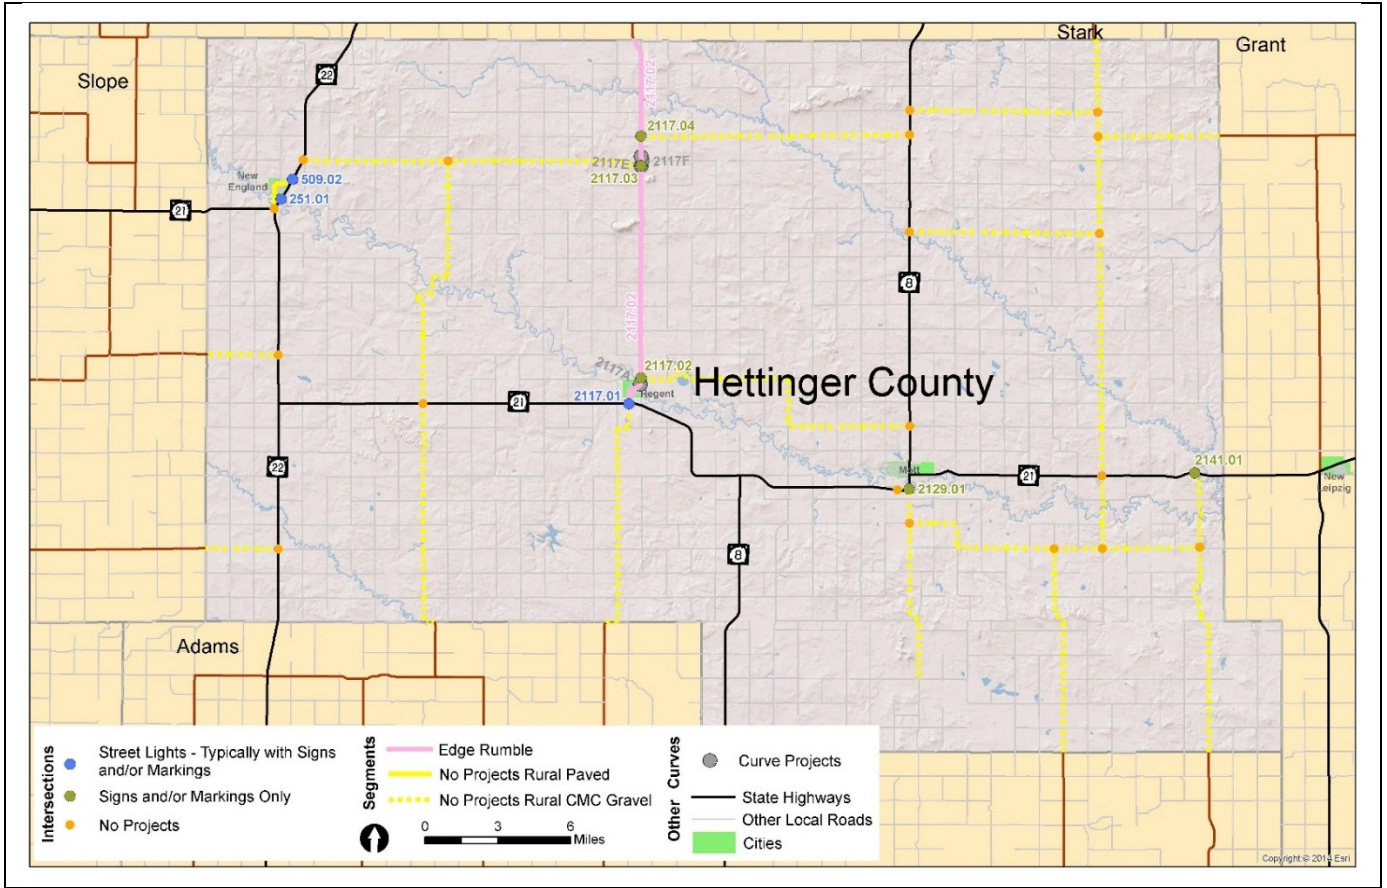


FIGURE 4-16
 Hettinger County Project Locations Map

McKenzie County

The total project cost suggested for McKenzie County \$946,120. The project cost breakout for intersection, roadway segment, and curve projects are listed in Table 4-17. High-priority locations that received a project are shown in Figure 4-17. These locations are described in further detail in Appendix: McKenzie County, along with priority rankings and suggested project sheets.

TABLE 4-17
McKenzie County Project Costs

Project Type	Cost
Intersections	\$647,760
Roadway Segments	\$187,125
Curves	\$111,235
Total	\$946,120

Five roadway segments that were identified as high-priority locations did not receive projects. These roadway segments were recently reconstructed; therefore, no projects were suggested since these new treatments reduce lane departure crashes (Table 4-18). In addition, three paved roadway segments had more than one severe crash, but were not high in the priority ranking. These roadway segments did not receive projects because these corridors were recently reconstructed with safety countermeasures.

TABLE 4-18
McKenzie County Priority Roadway Segment Locations without Suggested Treatments

Segment ID	Local Name	Segment Start	Segment End	Location Notes
14.01	106th Avenue NW/106.5 Avenue NW/ 31st Street NW/107th Avenue NW/ 32nd Street NW	ND 23	ND 73	Reconstructed using new design standards, edge and centerline rumbles
30.02	19th Street NW/130th Avenue NW/ 20th Street NW/134th Avenue NW/ 23rd Street NW	136th Avenue NW (McKenzie 27) (N)	ND 200	Reconstructed using new design standards, edge and centerline rumbles
10.01	39th Street NW/40th Street NW	ND 1806	ND 23	Reconstructed using new design standards, edge and centerline rumbles
16.01	156th Avenue NW/34th Street NW/ 35th Street NW/148th Avenue NW/ 147th Avenue NW/146th Avenue NW/ 38th Street NW/39th Street NW/ 155th Avenue NW	30.5 Street NW	US 85	Reconstructed using new design standards, edge and centerline rumbles
53.01	Bear Den Road/21st Street NW/ 109.5 Avenue NW/23rd Street NW/ 110th Avenue NW	ND 73	End Pavement	Reconstructed using new design standards, edge and centerline rumbles

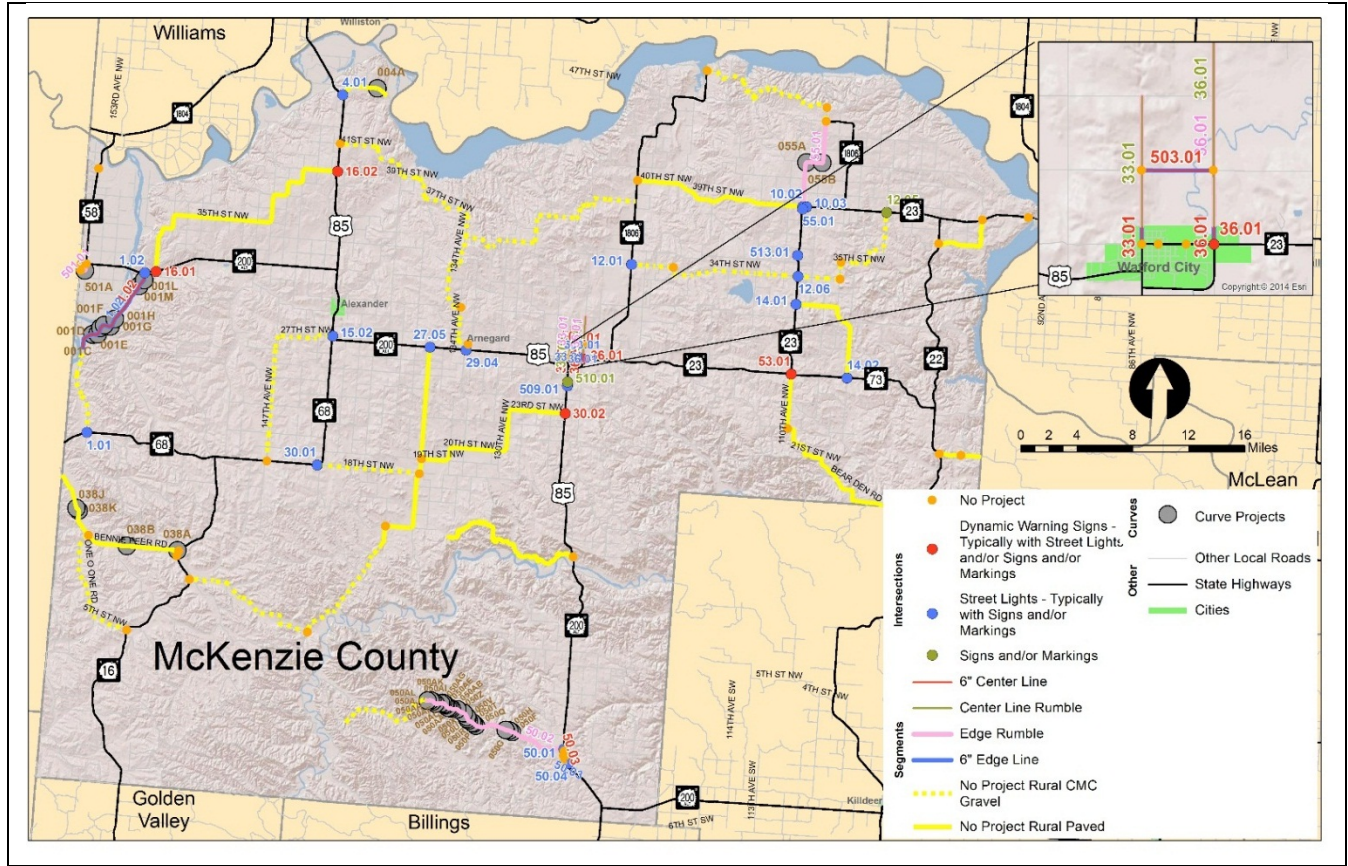


FIGURE 4-17
 McKenzie County Project Locations Map

McLean County

The total project cost suggested for McLean County \$3,675,343. The project cost breakout for intersection, roadway segment, and curve projects are listed in Table 4-19. High-priority locations that received a project are shown in Figure 4-18. These locations are described in further detail in Appendix: McLean County, along with priority rankings and suggested project sheets.

TABLE 4-19
 McLean County Project Costs

Project Type	Cost
Intersections	\$3,485,940
Roadway Segments	\$140,181
Curves	\$49,221
Total	\$3,675,343

Four intersections and one roadway segment (Tables 4-20 and 4-21) identified as high-priority locations did not receive projects. Three of these intersections are located within city limits and were removed from project consideration. The remaining intersection is yield-controlled.

TABLE 4-20
 McLean County Priority Intersection Locations without Suggested Treatments

Intersection ID	Description	Location Notes
15.04	Central Avenue NW & Trooper Avenue (McLean 15)	Within city limits of Garrison – removed from consideration
33.02	W Wing Street (McLean 33) & Main Street	Within city limits of Mercer – removed from consideration
33.03	McLean 33 & 4th Avenue NW (McLean 35)	Yield-controlled – removed from consideration
2.07	Carvell Street & 3rd Avenue SE	Within city limits of Max – removed from consideration

TABLE 4-21
 McLean County Priority Roadway Segment Locations without Suggested Treatments

Segment ID	Local Name	Segment Start	Segment End	Location Notes
27.02	Roosevelt Street	South Avenue (ND 41)	McLean 12	Short segment – removed from consideration

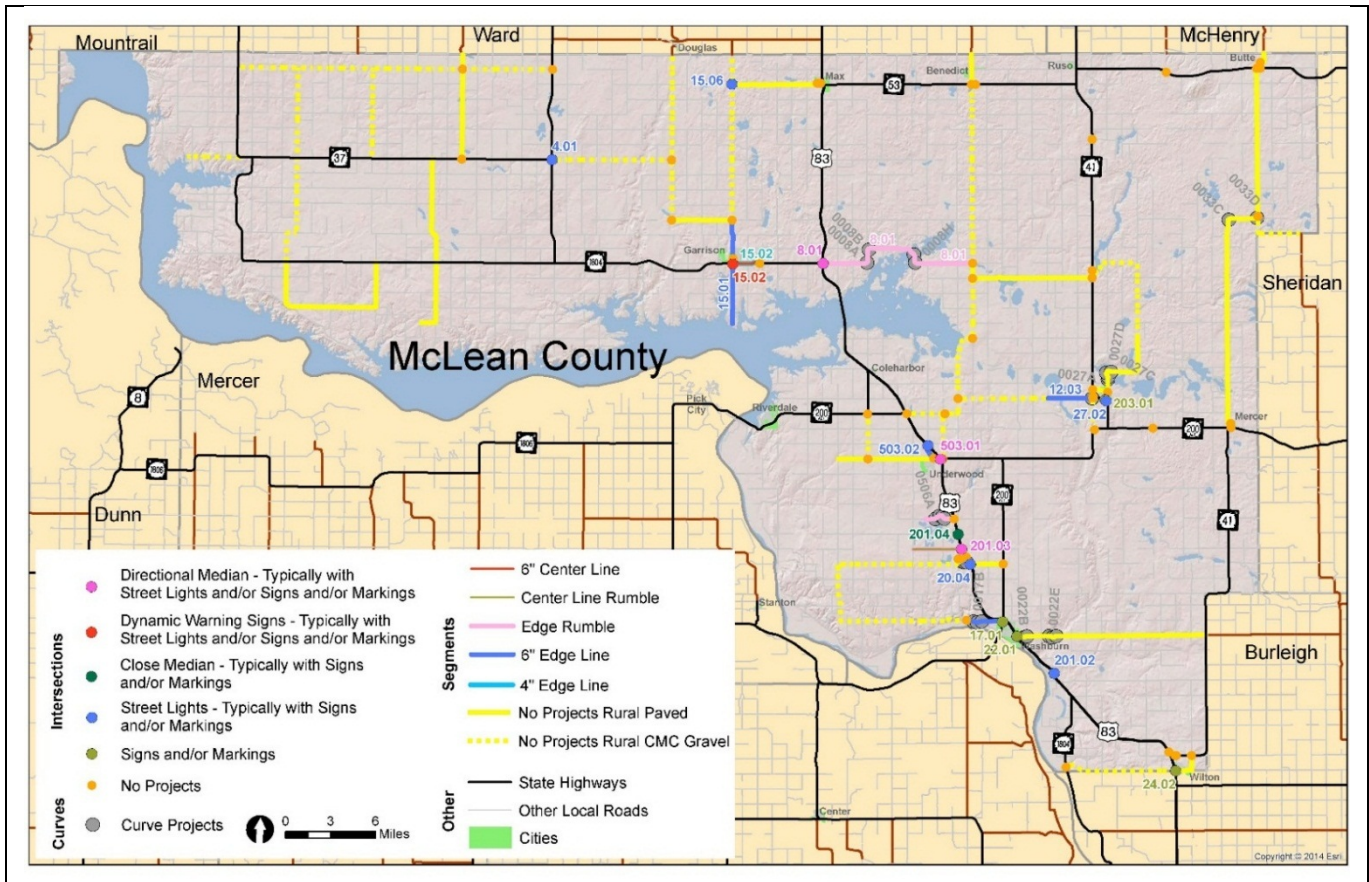


FIGURE 4-18
 McLean County Project Locations Map

Mercer County

The total project cost suggested for Mercer County \$786,386. The project cost breakout for intersection, roadway segment, and curve projects are listed in Table 4-22. High-priority locations that received a project are shown in Figure 4-19. These locations are described in further detail in Appendix: Mercer County, along with priority rankings and suggested project sheets.

TABLE 4-22
 Mercer County Project Costs

Project Type	Cost
Intersections	\$300,720
Roadway Segments	\$366,048
Curves	\$119,618
Total	\$786,386

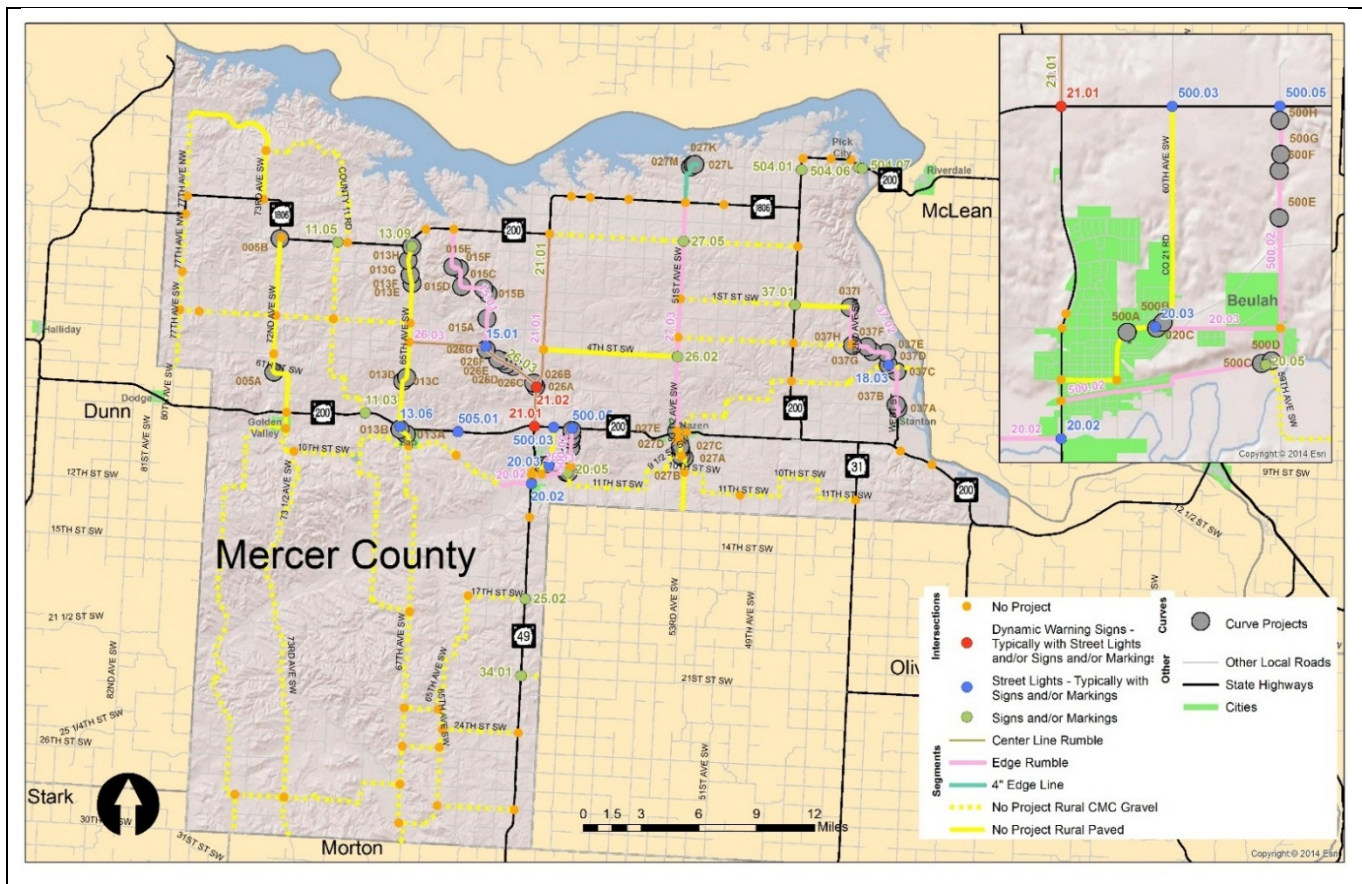


FIGURE 4-19
 Mercer County Project Locations Map

Mountrail County

The total project cost suggested for Mountrail County \$2,755,005. The project cost breakout for intersection, roadway segment, and curve projects are listed in Table 4-23. High-priority locations that received a project are shown in Figure 4-20. These locations are described in further detail in Appendix: Mountrail County, along with priority rankings and suggested project sheets.

TABLE 4-23
 Mountrail County Project Costs

Project Type	Cost
Intersections	\$2,679,780
Roadway Segments	\$51,084
Curves	\$24,141
Total	\$2,755,005

One roadway segment identified as a high-priority location did not receive projects (Table 4-24). Part of this segment is located within the city limits of Carson and is an urban designed roadway where rural projects would not apply. The remaining portion of the roadway segment was too short to be considered for a corridor project.

TABLE 4-24
 Mountrail County Priority Roadway Segment Locations without Suggested Treatments

Segment ID	Local Name	Segment Start	Segment End	Location Notes
521.01	62nd Street NW	US 2	Main Street N	Short segment – removed from consideration

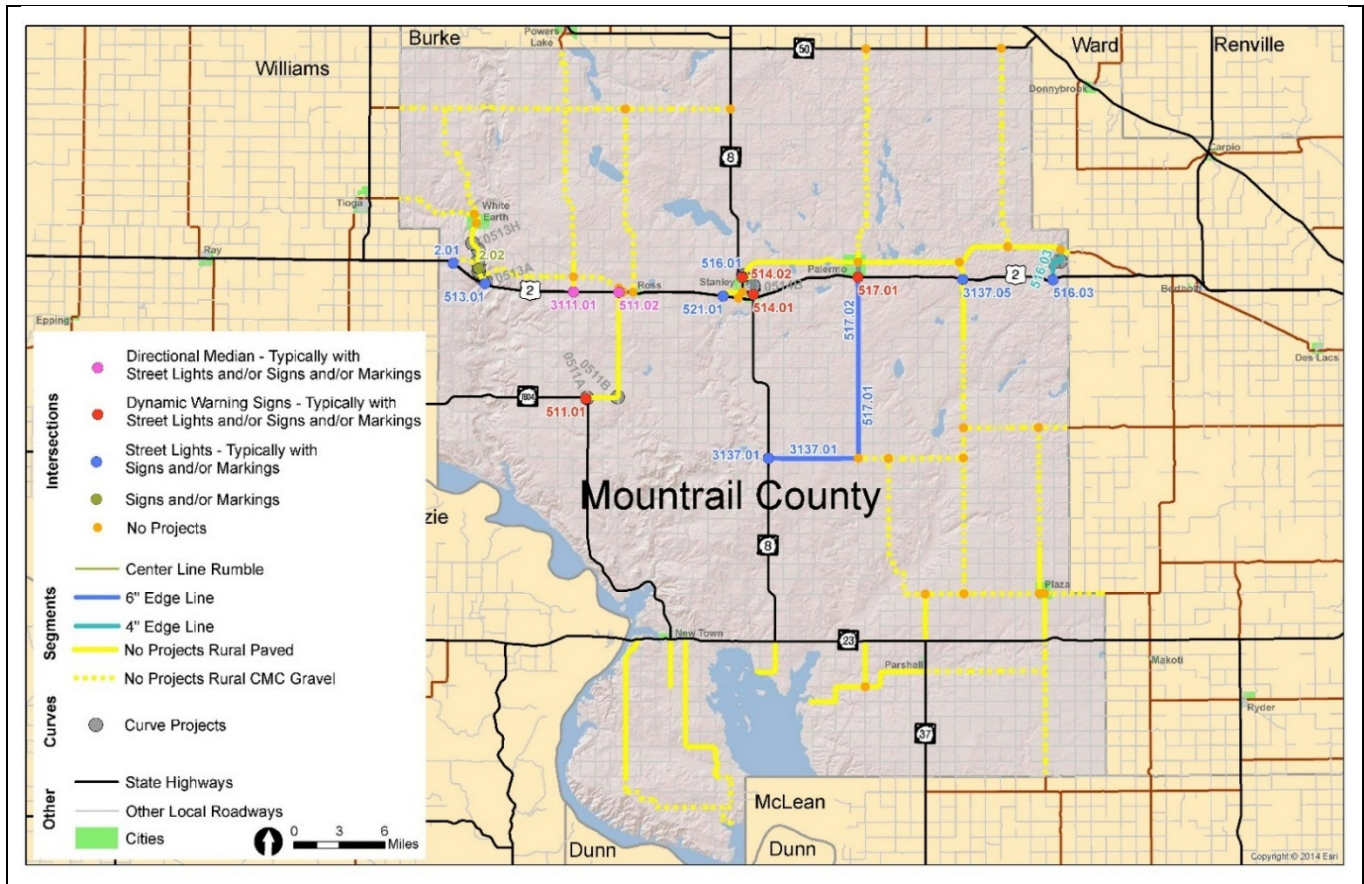


FIGURE 4-20
 Moutrail County Project Locations Map

Renville County

The total project cost suggested for Renville County \$366,867. The project cost breakout for intersection, roadway segment, and curve projects are listed in Table 4-25. High-priority locations that received a project are shown in Figure 4-21. These locations are described in further detail in Appendix: Renville County, along with priority rankings and suggested project sheets.

TABLE 4-25
 Renville County Project Costs

Project Type	Cost
Intersections	\$65,880
Roadway Segments	\$163,800
Curves	\$137,187
Total	\$366,867

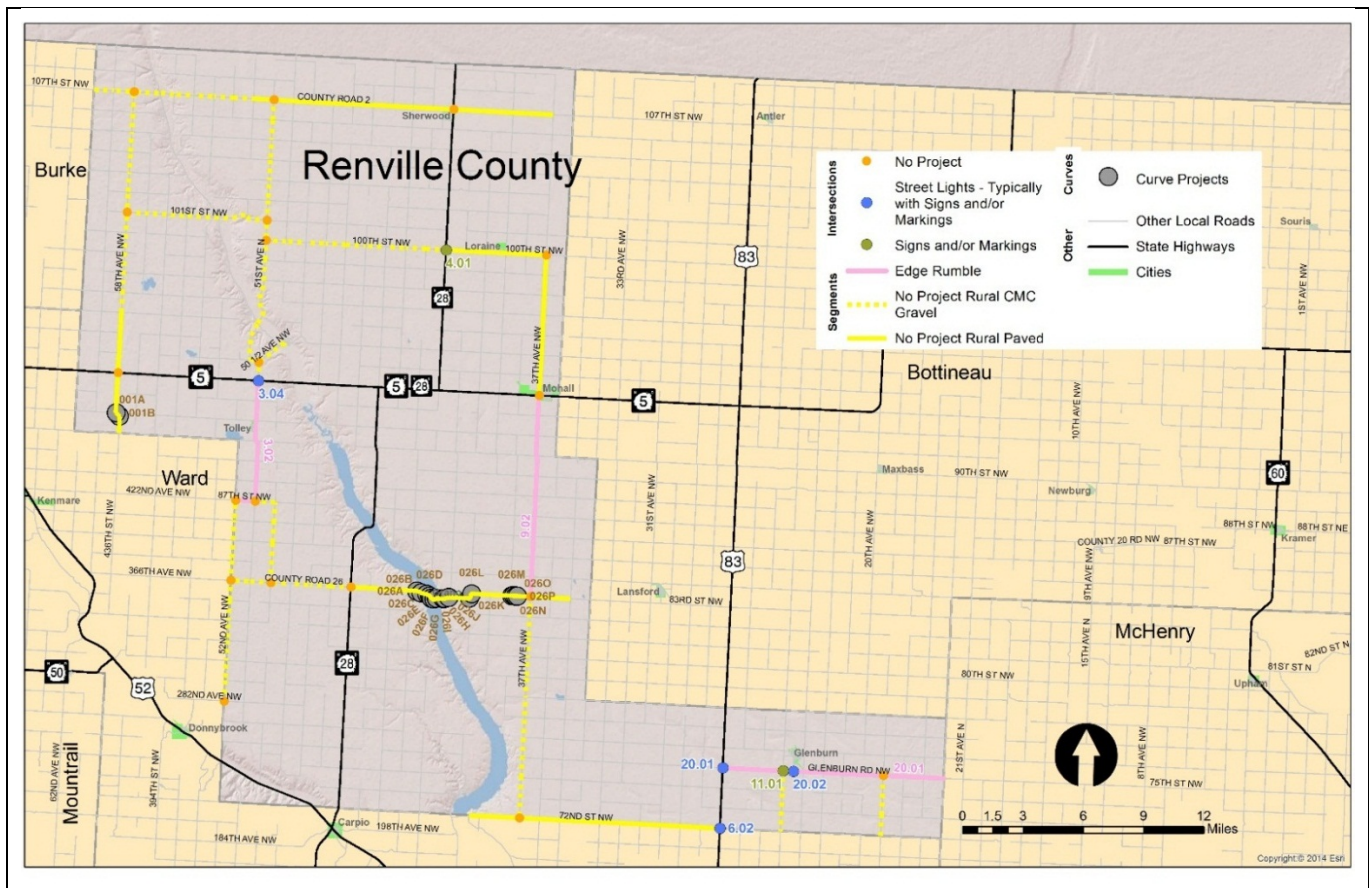


FIGURE 4-21
 Renville County Project Locations Map

Slope County

The total project cost suggested for Slope County \$60,912. The project cost breakout for intersection, roadway segment, and curve projects are listed in Table 4-26. High-priority locations that received a project are shown in Figure 4-22. These locations are described in further detail in Appendix: Slope County, along with priority rankings and suggested project sheets.

TABLE 4-26
 Slope County Project Costs

Project Type	Cost
Intersections	\$31,200
Roadway Segments	\$7,605
Curves	\$22,107
Total	\$60,912

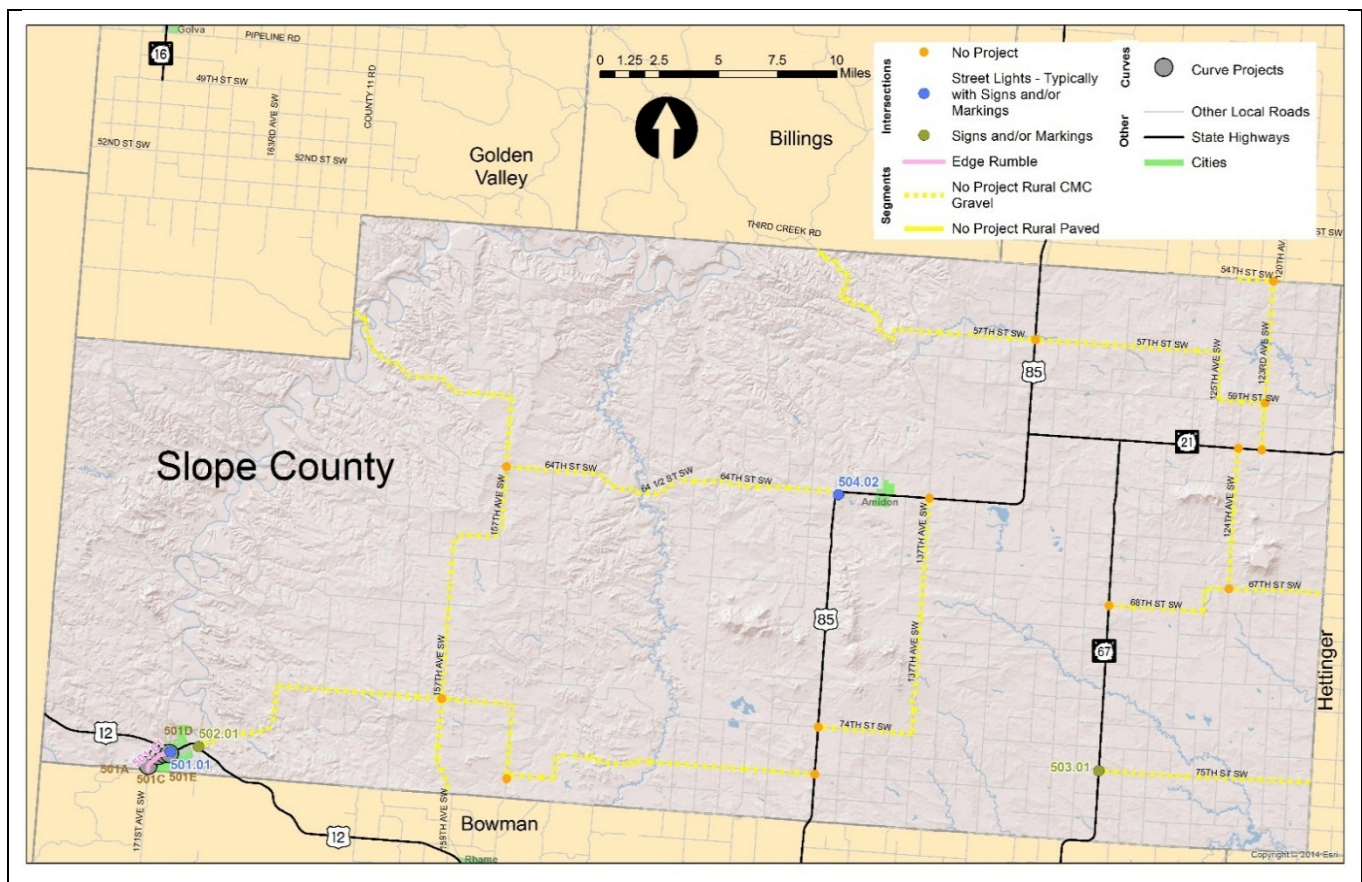


FIGURE 4-22
 Slope County Project Locations Map

Stark County

The total project cost suggested for Stark County \$937,085. The project cost breakout for intersection, roadway segment, and curve projects are listed in Table 4-27. High-priority locations that received a project are shown in Figure 4-23. These locations are described in further detail in Appendix: Stark County, along with priority rankings and suggested project sheets.

TABLE 4-27
 Stark County Project Costs

Project Type	Cost
Intersections	\$375,180
Roadway Segments	\$504,203
Curves	\$57,701
Total	\$937,085

One intersection identified as a high-priority location did not receive projects. This intersection is yield-controlled and was removed from consideration (Table 4-28).

TABLE 4-28
 Stark County Priority Intersection Locations without Suggested Treatments

Intersection ID	Description	Location Notes
222.09	15th Street SE & Main Street	Yield-controlled – removed from consideration

One roadway segment identified as a high-priority location did not receive projects. Half of this segment is located within the city limits of Belfield and is an urban designed roadway where rural projects would not apply. The remaining portion of the roadway segment was too short to be considered for a corridor project (Table 4-29).

TABLE 4-29
 Stark County Priority Roadway Segment Locations without Suggested Treatments

Segment ID	Local Name	Segment Start	Segment End	Location Notes
508.01	35th Street SW	132nd Avenue SW (west border of Stark)	US 85	Short segment – removed from consideration

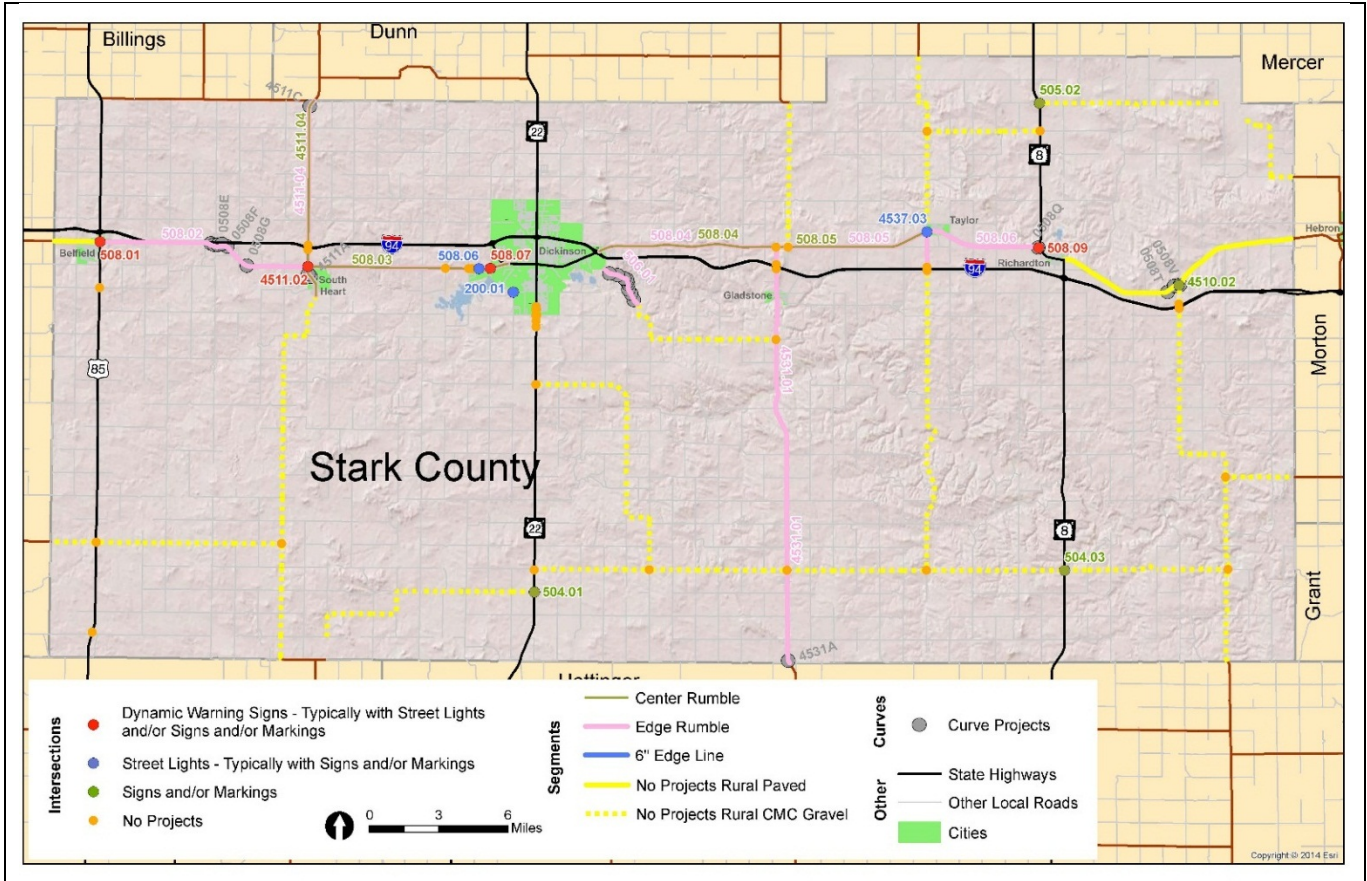


FIGURE 4-23
 Stark County Project Locations Map

City of Dickinson

The total project cost suggested for City of Dickinson is \$1,199,067. The project cost breakout for roadway segment, right-angle intersection, and pedestrian/bicyclist intersection projects are listed in Table 4-30. High-priority locations that received a project are shown in Figure 4-24. These locations are described in further detail in Appendix: City of Dickinson, along with priority rankings and suggested project sheets.

TABLE 4-30
 City of Dickinson Project Costs

Project Type	Cost
Roadway Segments	\$632,667
Right-Angle Intersections	\$8,400
Pedestrian and Bicyclist Intersections	\$558,000
Total	\$1,199,067

Eight roadway segments in Table 4-31 were identified as high-priority locations and did not receive projects. Three of these segments had the recommended treatment already in place, three corridors had inadequate roadway width in order to implement the recommended treatment, one had the recommended treatment in place along the portion of the roadway where it was feasible, and the remaining roadway segment was a rural design where urban project suggestions were not applicable.

TABLE 4-31
 City of Dickinson Priority Roadway Segment Locations without Suggested Treatments

Segment ID	Local Name	Segment Start	Segment End	Location Notes
22.02	S Main Avenue	8th Street SW	I-94 Business Loop	Portion is existing three-lane section, remaining section is too narrow
22.03	3rd Avenue W	I-94 Business Loop	I-94	Existing three-lane section
815.01	State Avenue	8th Street SW	I-94 Business Loop	Existing roadway too narrow
22.04	3rd Avenue W	I-94	33rd Street SW	Existing five-lane section
815.02	State Avenue	I-94 Business Loop	I-94	Existing three-lane section
828.01	10th Avenue E/ Livestock Lane	38th Street SW	Broadway East	Rural design – urban projects not applicable
837.01	Frontage Road	10th Avenue W	Dead end	Existing roadway too narrow
800.01	8th Street SW	State Avenue	ND 22	Existing roadway too narrow

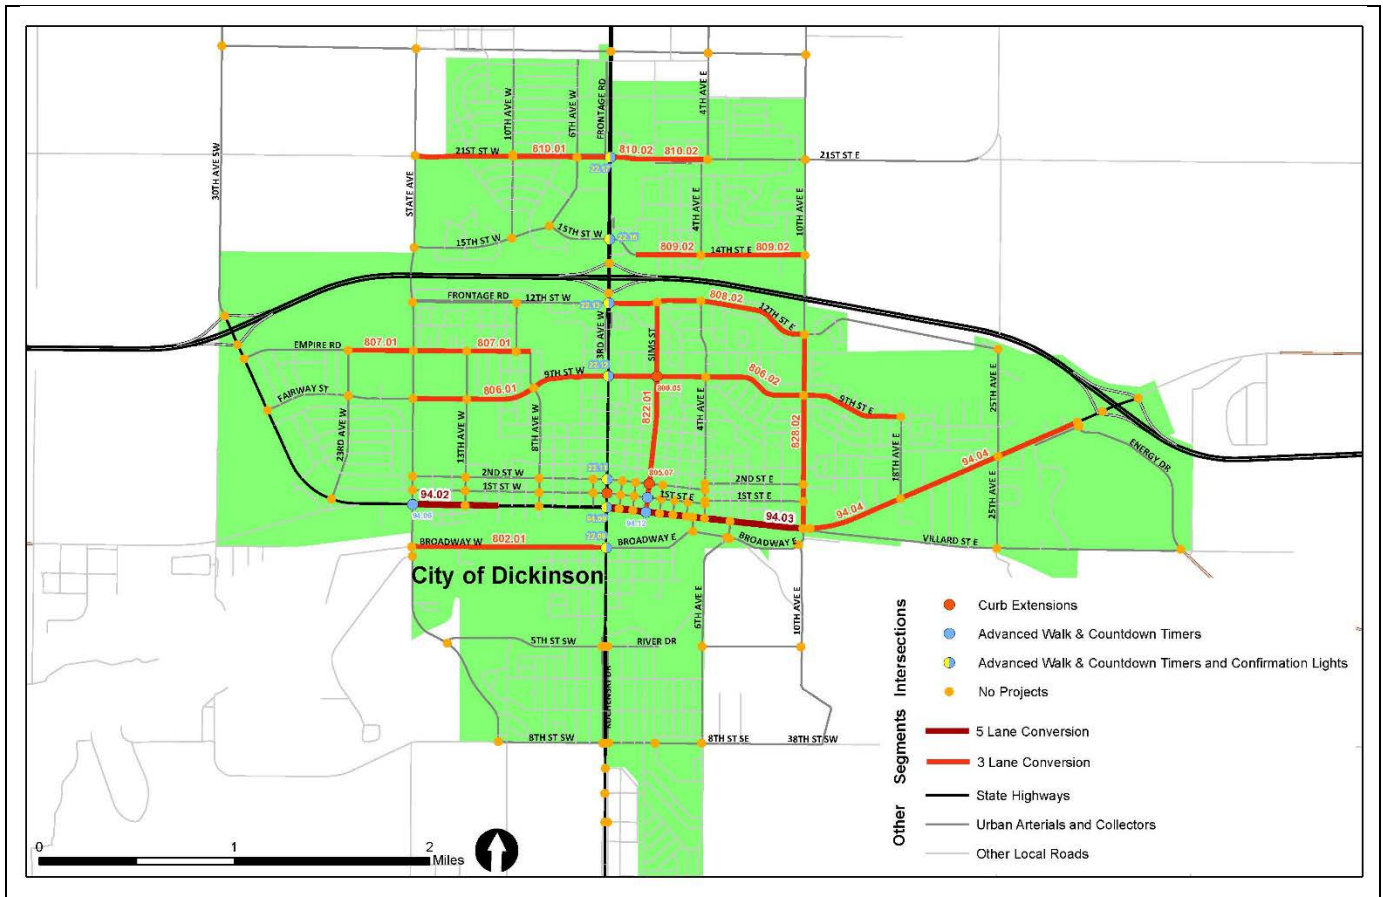


FIGURE 4-24
 City of Dickinson Urban Roadway Segment, Right-Angle, and Bicycle/Pedestrian Project Locations Map

Williams County

The total project cost suggested for Williams County \$2,148,372. The project cost breakout for intersection, roadway segment, and curve projects are listed in Table 4-32. High-priority locations that received a project are shown in Figure 4-25. These locations are described in further detail in Appendix: Williams County, along with priority rankings and suggested project sheets.

TABLE 4-32
 Williams County Project Costs

Project Type	Cost
Intersections	\$1,626,780
Roadway Segments	\$316,395
Curves	\$205,197
Total	\$2,148,372

Five paved roadway segments had more than one severe crash, but were not high in the priority ranking. These segments did not receive projects because there were no patterns in crashes or projects identified at intersections or curves that could be mitigated with safety countermeasures.

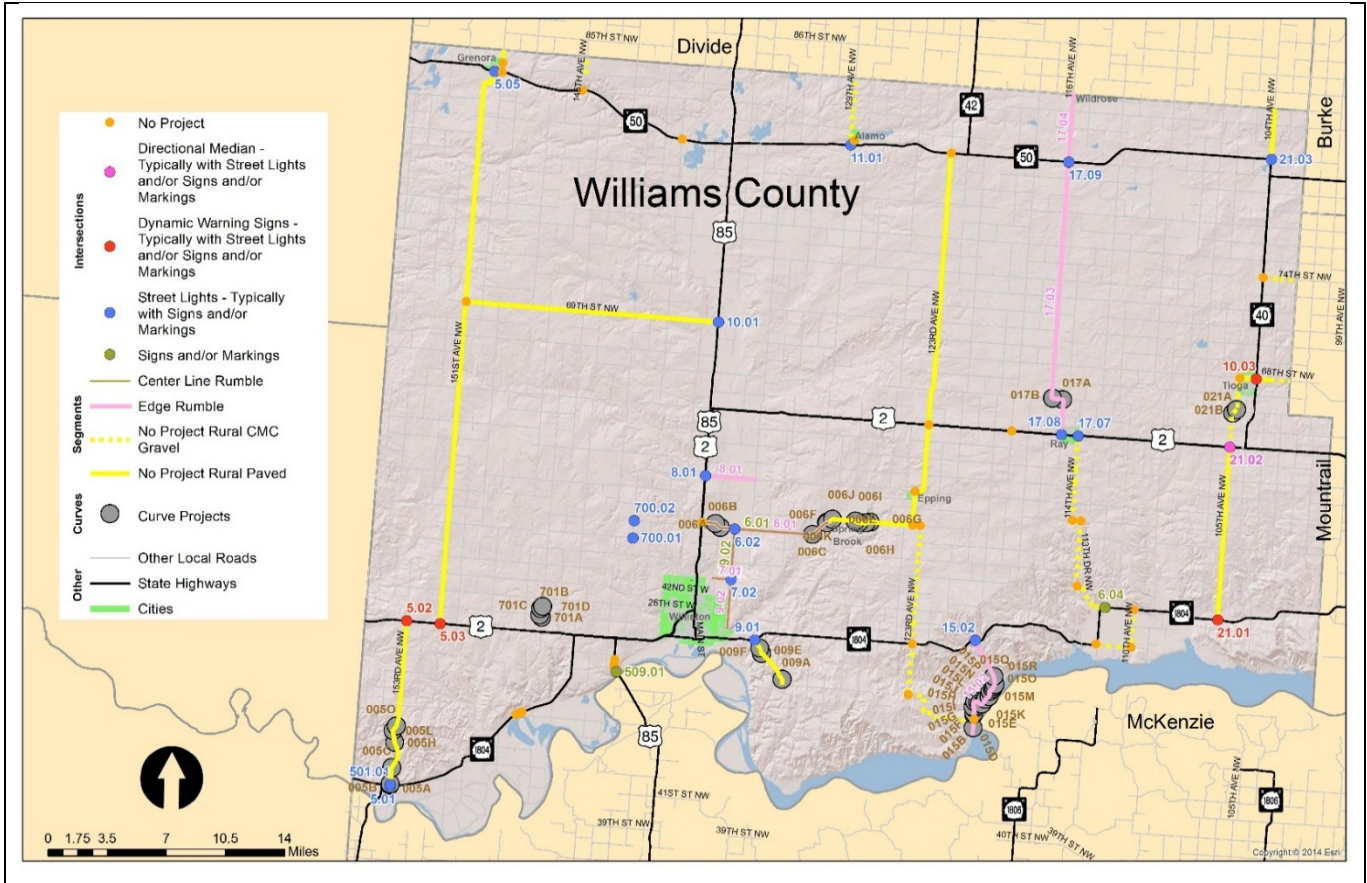


FIGURE 4-25
Williams County Project Locations Map

City of Williston

The total project cost suggested for City of Williston is \$1,040,760. The project cost breakout for roadway segment, right-angle intersection, and pedestrian/bicyclist intersection projects are listed in Table 4-33. High-priority locations that received a project are shown in Figures 4-26 and 4-27. These locations are described in further detail in Appendix: City of Williston, along with priority rankings and suggested project sheets.

TABLE 4-33
 City of Williston Project Costs

Project Type	Cost
Roadway Segments	\$596,160
Right-Angle Intersections	\$6,000
Pedestrian and Bicyclist Intersections	\$438,600
Total	\$1,040,760

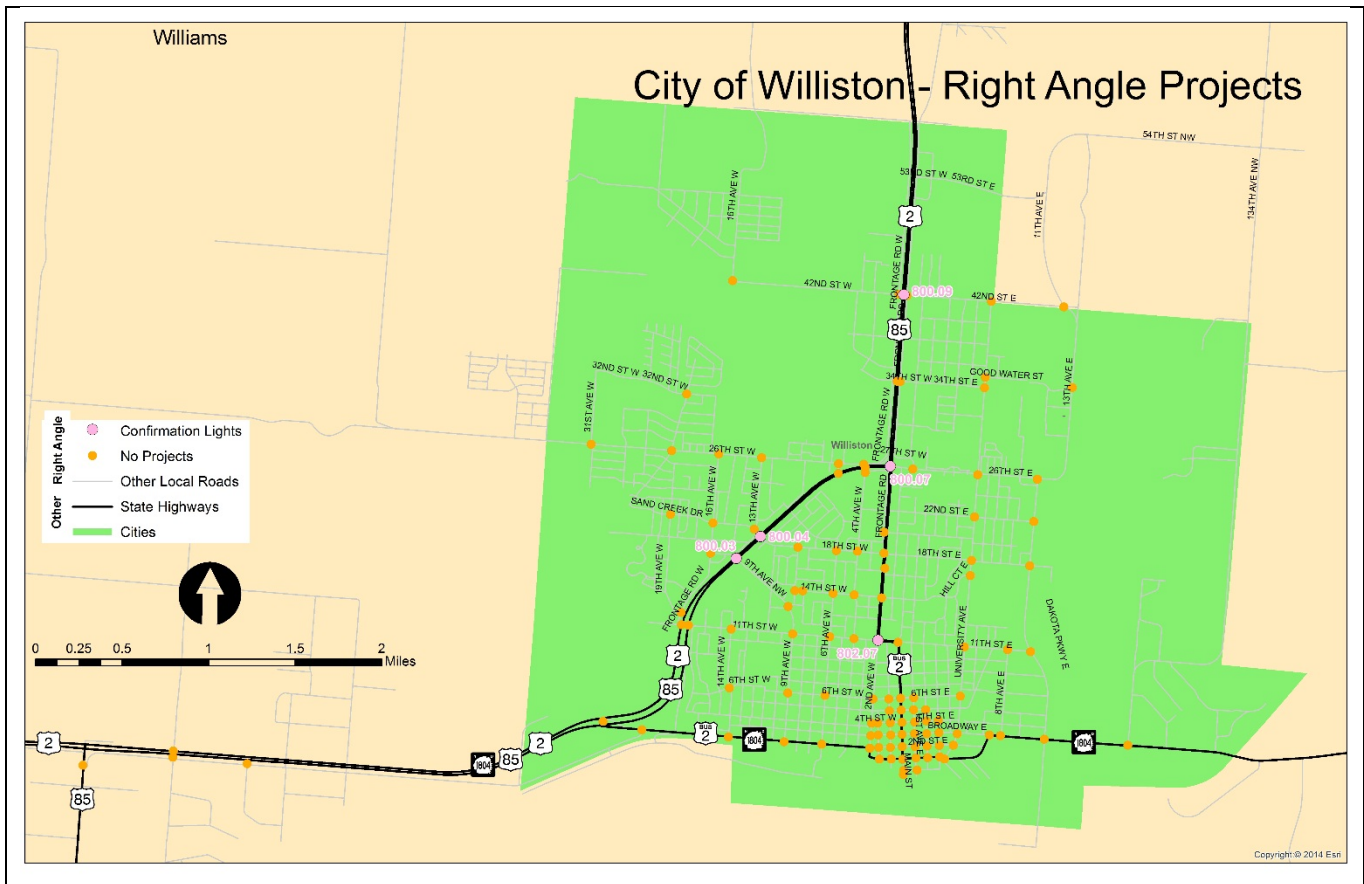


FIGURE 4-26
 City of Williston Urban Right-Angle Intersection Project Locations Map

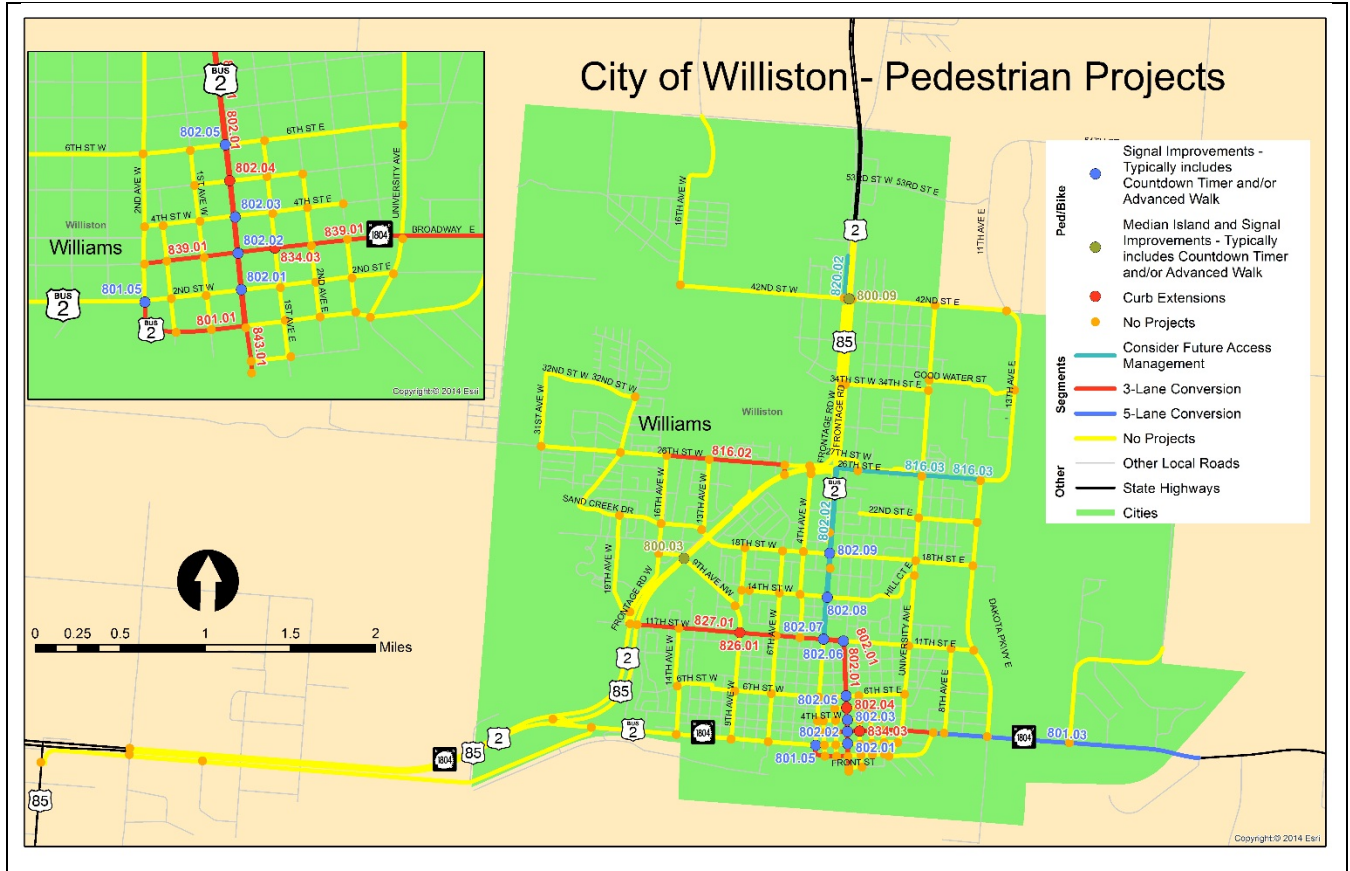


FIGURE 4-27
 City of Williston Urban Roadway Segment and Pedestrian/Bicyclist Intersection Project Locations Map

Theodore Roosevelt National Park

The total project cost suggested for Theodore Roosevelt National Park is \$139,020. The project cost breakout for intersection, roadway segment, and curve intersection projects are listed in Table 4-34. High-priority locations that received a project are shown in Figures 4-28 and 4-29. These locations are described in further detail in Appendix: Theodore Roosevelt National Park, along with priority rankings and suggested project sheets.

Because Theodore Roosevelt National Park has a unique preservation mission, some of the typical low-cost systemic countermeasures do not fit within the park’s context. Therefore, additional low-cost systemic countermeasures were identified that the park may be able to deploy. For the following countermeasures, no specific projects are included in the park’s appendix, but staff from Theodore Roosevelt National Park can pursue these project types with the assistance of either Federal Lands Highway or the NDDOT, as appropriate.

- Apply retroreflective tabs to existing guard rails
- Review and remove or replace existing signs (including object markers, speed limit signs, etc.)
- Trim vegetation along curves and in areas with sight distance issues
- Review and apply edge line markings to scenic overlooks
- Install Safety EdgeSM on pavement

TABLE 4-34
 Theodore Roosevelt National Park Project Costs

Project Type	Cost
Intersections	\$13,320
Roadway Segments	\$125,700
Curves	\$0
Total	\$139,020

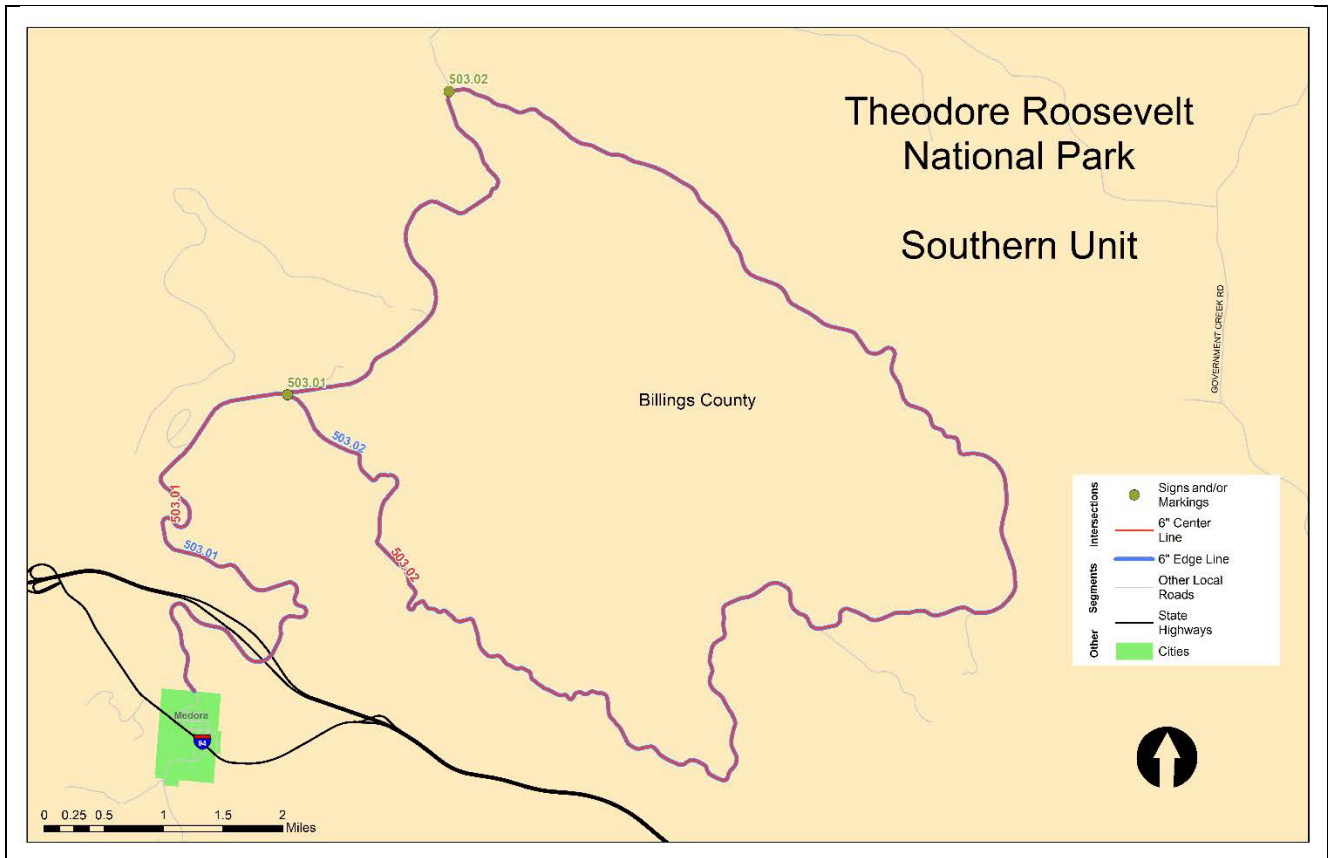


FIGURE 4-28
Theodore Roosevelt National Park South Loop Rural Project Locations Map

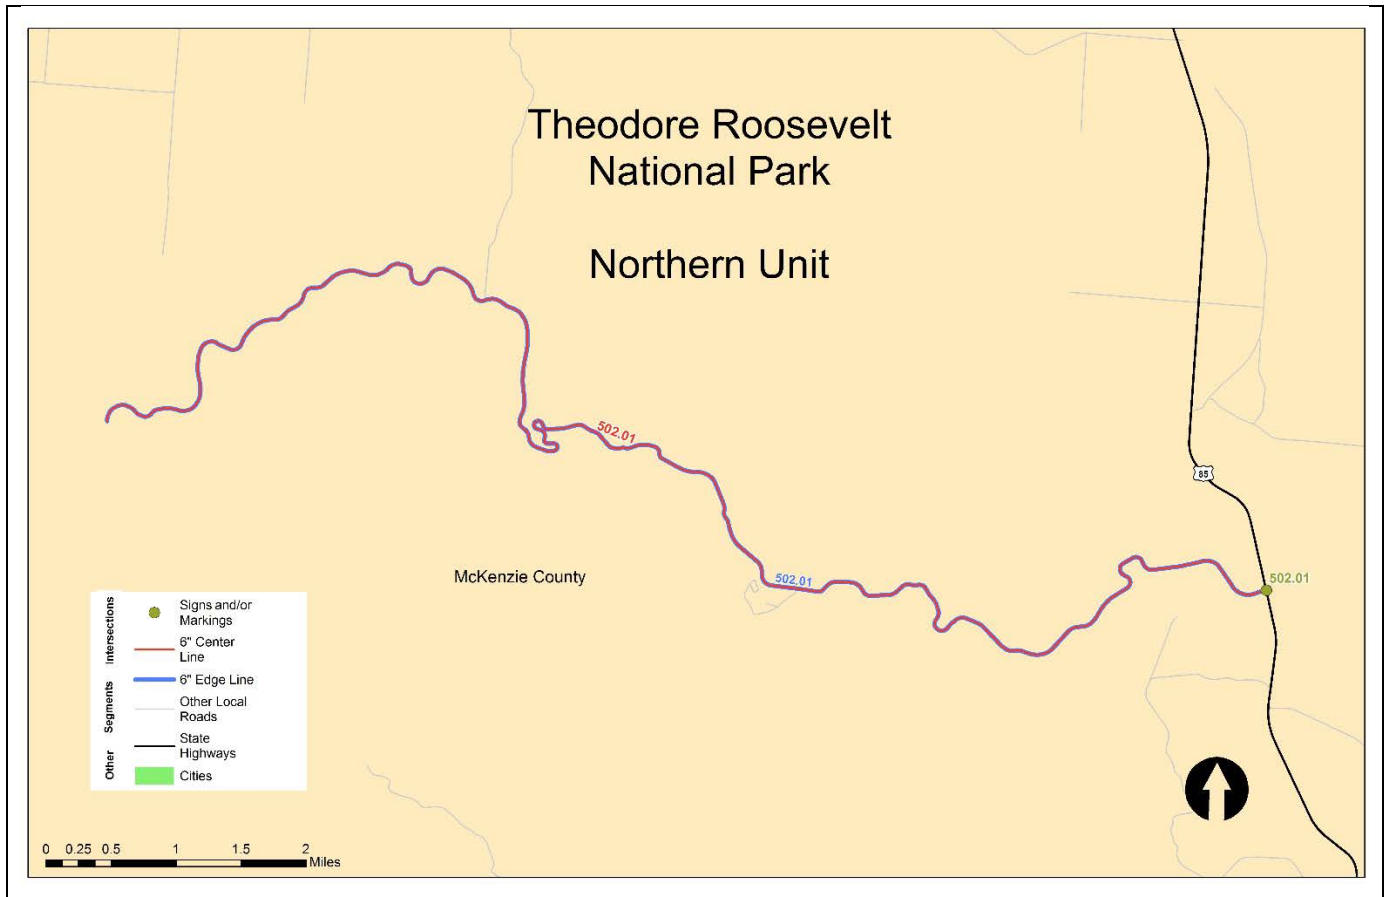


FIGURE 4-29
Theodore Roosevelt National Park North Loop Rural Project Locations Map

23 USC 409
NDDOT Reserves All Objections

APPENDIX
Adams County

[Appendix Intentionally Left Blank]

23 USC 409
NDDOT Reserves All Objections

APPENDIX
Billings County

[Appendix Intentionally Left Blank]

23 USC 409
NDDOT Reserves All Objections

APPENDIX
Bowman County

[Appendix Intentionally Left Blank]

23 USC 409
NDDOT Reserves All Objections

[Appendix Intentionally Left Blank]

23 USC 409
NDDOT Reserves All Objections

APPENDIX
Divide County

[Appendix Intentionally Left Blank]

23 USC 409
NDDOT Reserves All Objections

APPENDIX
Dunn County

[Appendix Intentionally Left Blank]

23 USC 409
NDDOT Reserves All Objections

APPENDIX
Golden Valley County

[Appendix Intentionally Left Blank]

23 USC 409
NDDOT Reserves All Objections

APPENDIX
Grant County

[Appendix Intentionally Left Blank]

23 USC 409
NDDOT Reserves All Objections

APPENDIX
Hettinger County

[Appendix Intentionally Left Blank]


23 USC 409
NDDOT Reserves All Objections

APPENDIX
McKenzie County

[Appendix Intentionally Left Blank]

23 USC 409
NDDOT Reserves All Objections

APPENDIX
McLean County

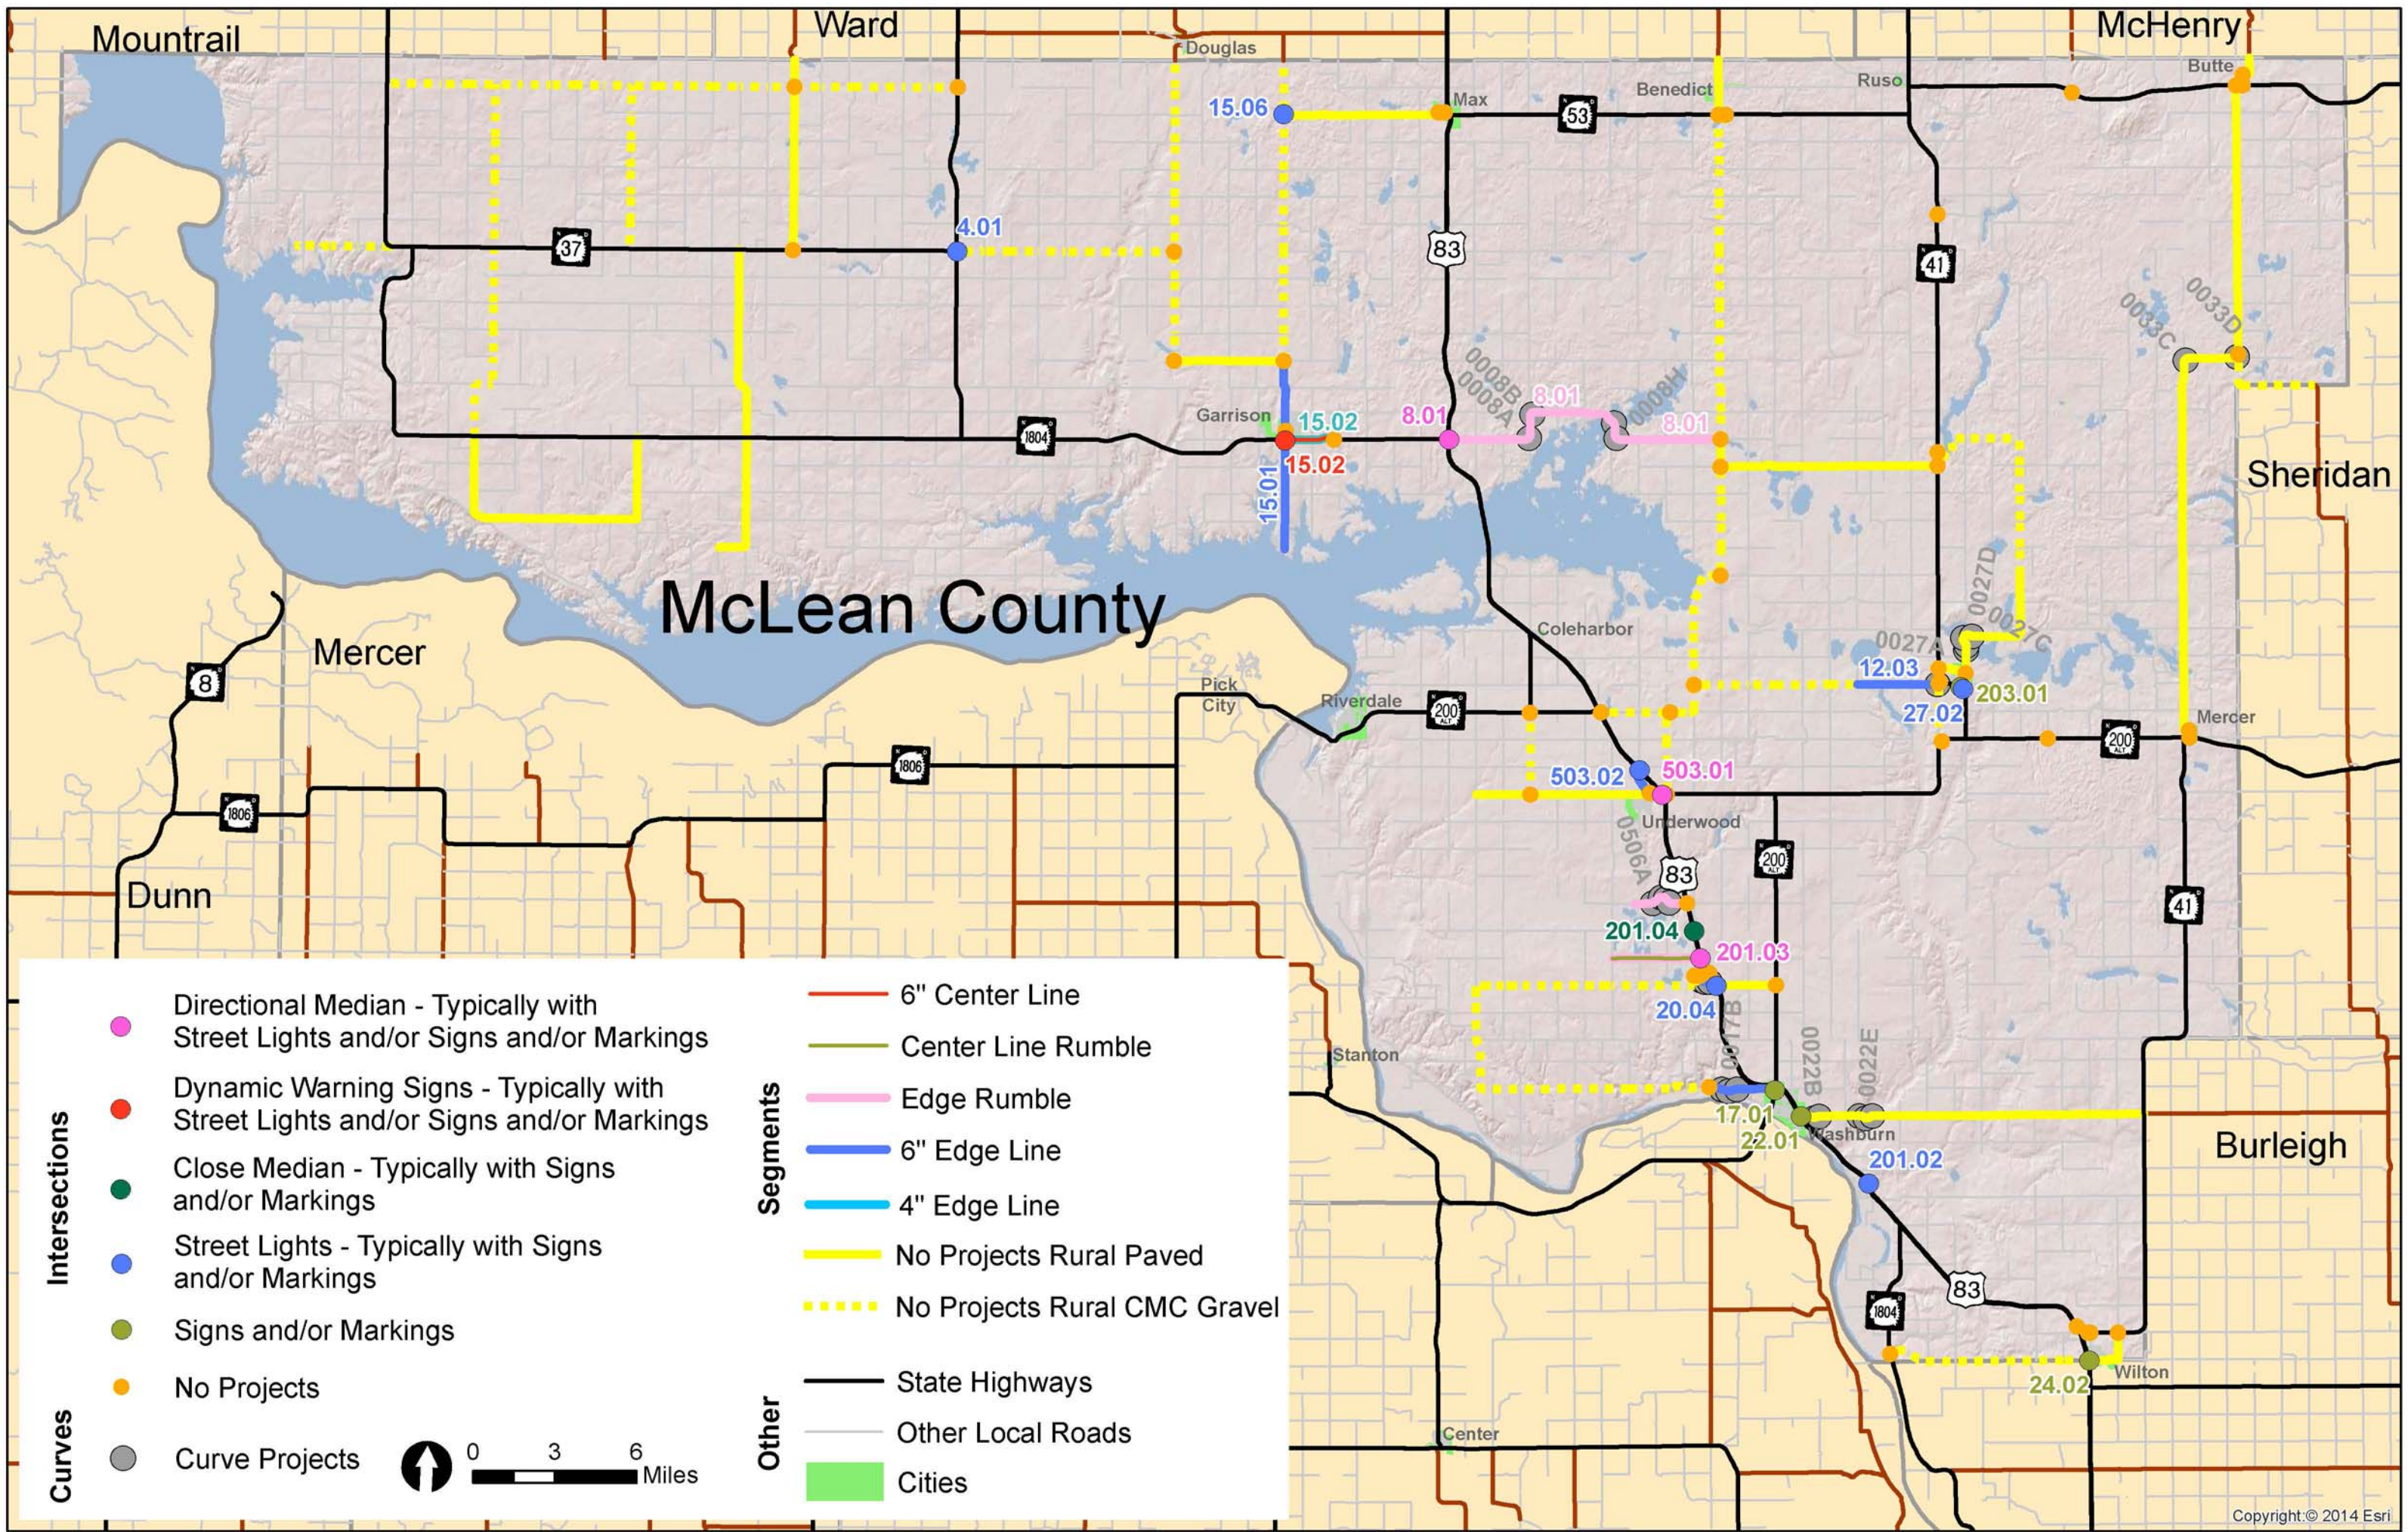

- Intersections**
- Directional Median - Typically with Street Lights and/or Signs and/or Markings
 - Dynamic Warning Signs - Typically with Street Lights and/or Signs and/or Markings
 - Close Median - Typically with Signs and/or Markings
 - Street Lights - Typically with Signs and/or Markings
 - Signs and/or Markings
 - No Projects
- Curves**
- Curve Projects

- Segments**
- 6" Center Line
 - Center Line Rumble
 - Edge Rumble
 - 6" Edge Line
 - 4" Edge Line
 - No Projects Rural Paved
 - No Projects Rural CMC Gravel
- Other**
- State Highways
 - Other Local Roads
 - Cities



McLean County
Rural Segment Projects

Page	Corridor ID	Route #	Start	End	Length	Risk Ranking	4" Edge Line	6" Edge Lines	Edge Rumble Strip	Center Line Rumble	6" Center Line	Project Cost (\$)
1	15.02	McLean 15	2nd St SW	ND 37/1804	1.9	★★★★	1.3	0.0	0.0	0.0	1.3	\$ 2,979
2	15.03	McLean 15	ND 37/1804	19th St NW (McLean 502)	3.0	★★★★	0.0	2.2	0.0	0.0	0.0	\$ 4,277
3	15.01	McLean 15	North border of Lake Sakakawea	ND 37/1804	4.0	★★★	0.0	3.4	0.0	0.0	0.0	\$ 6,811
4	8.01	McLean 8	US 83	McLean 23	12.1	★★★	0.0	1.1	11.0	0.0	0.0	\$ 66,571
5	12.03	McLean 12	20th Ave NW	ND 41	3.1	★★★	0.0	3.1	0.0	0.0	0.0	\$ 6,138
6	20.03	McLean 20	26th Ave SW	US 83	1.0	★★★	0.0	1.0	0.0	0.0	0.0	\$ 1,980
7	505.01	No designation	US 83	29th Ave SW	3.2	★★★	0.0	0.0	3.2	3.2	0.0	\$ 30,240
8	503.01	No designation	US 83 & ND 200	US 83 & 28th Ave NW	1.7	★★★	0.0	1.7	0.0	0.0	0.0	\$ 3,366
9	506.01	No designation	US 83	29th Ave SW	2.2	★★★	0.0	0.0	2.2	0.0	0.0	\$ 12,870
10	17.01	McLean 17	ND 200	8th St SW	2.5	★★★	0.0	2.5	0.0	0.0	0.0	\$ 4,950
23 USC 409 NDDOT Reserves All Objections					34.7		1.3	15.0	16.4	3.2	1.3	\$ 140,181

**McLean County
Rural Segment Listing**

23 USC 409
NDDOT Reserves All Objections

*High Priority Segments Project Sheet Page Number

Project Sheet Page*	Corridor	Route	Start	End	Length (miles)	Lane Departure Crashes	ADT	Lane Departure Density	Access Density	Curves w/ Critical Radius / Mile	Edge Risk Assessment
4	2.03	McLean 2	McLean 15	ND 53	6.1	3	105	0.10	5.1	0.00	2
	8.01	McLean 8	US 83	McLean 23	12.1	4	245	0.07	5.5	0.50	2
	8.02	McLean 8	McLean 23	ND 41	8.0	0	125	0.00	4.8	0.00	1
	9.01	McLean 9	ND 37	373rd Ave SW/North border of McLean	7.0	1	77	0.03	5.7	0.00	2
5	12.03	McLean 12	20th Ave NW	ND 41	3.1	0	145	0.00	7.4	0.32	2
	12.04	McLean 12	ND 41	16th Ave NW (McLean 27)	1.1	0	230	0.00	10.0	0.00	2
	14.01	McLean 14	34th Ave NW	32nd Ave NW (McLean 19)	2.1	0	120	0.00	5.2	0.00	1
	14.02	McLean 14	32nd Ave NW (McLean 19)	Old US 83 (McLean 503)	4.5	0	235	0.00	4.7	0.00	1
3	15.01	McLean 15	North border of Lake Sakakawea	ND 37/1804	4.0	1	483	0.05	11.0	0.00	2
1	15.02	McLean 15	2nd St SW	ND 37/1804	1.9	1	770	0.11	7.9	0.00	2
2	15.03	McLean 15	ND 37/1804	19th St NW (McLean 502)	3.0	5	597	0.33	8.0	0.00	2
10	17.01	McLean 17	ND 200	8th St SW	2.5	4	309	0.32	11.6	0.40	1
6	20.03	McLean 20	26th Ave SW	US 83	1.0	0	95	0.00	9.0	4.00	2
	20.04	McLean 20	US 83	ND 200	2.2	0	75	0.00	6.8	0.00	1
	22.01	McLean 22	US 83	ND 41	12.7	1	205	0.02	5.4	0.24	1
	23.02	McLean 23	15th St NW (McLean 8)	16th St NW (McLean 8)	1.0	0	100	0.00	6.0	0.00	1
	23.04	McLean 23	ND 53	373rd Ave SW/North border of McLean	2.0	2	193	0.20	5.5	0.00	1
	24.02	McLean 24	US 83	ND 41 & 12th St NE	2.2	3	213	0.27	4.5	0.00	2
	27.02	McLean 27	South Ave (ND 41)	McLean 12	0.7	1	500	0.29	7.1	0.00	1
	27.03	McLean 27	McLean 12	11th St NW	6.0	0	155	0.00	5.0	0.67	2
	33.01	McLean 33	ND 200/41	4th Ave NW (McLean 35)	16.3	4	154	0.05	5.8	0.12	2
	33.02	McLean 33	19th St NW	ND 53	10.0	1	95	0.02	6.3	0.00	1
	33.03	McLean 33	ND 53	30th St N (North border of McLean)	1.3	0	240	0.00	6.2	0.00	2
	502.01	No designation	43rd Ave NW (McLean 23)	McLean 15	4.0	0	195	0.00	6.8	0.00	2
8	503.01	No designation	US 83 & ND 200	US 83 & 28th Ave NW	1.7	3	631	0.35	12.4	0.00	1
7	505.01	No designation	US 83	29th Ave SW	3.2	7	1,190	0.44	7.2	0.00	1
9	506.01	No designation	US 83	29th Ave SW	2.2	0	610	0.00	6.4	1.82	1
					121.9	41					

Edge Risk Legend

- 3 -- Risky' - NEITHER shoulder or good clear zone
- 2 -- Either a shoulder OR good clear zone
- 1 -- BOTH shoulder and a good clear zone

Critical ADT Range - Lane Departure

Min	450
Max	1,000,000

	Access	Lane Departure	Critical Radius Curves
Total	759	41	25
Total Mileage	121.9	121.9	121.9
Years		5	
Average Density (Total/Mile)	6.2	0.07	0.21

**McLean County
Rural Segment Prioritization - Lane Departure Priority**

23 USC 409
NDDOT Reserves All Objections

#	Corridor	Route	Start	End	Length	ADT	ADT Range	Lane Departure Density	Access Density	Curve Critical Radius Density	Edge Risk	Tiebreakers		
												Totals	Edge Risk ADT	
1	15.02	McLean 15	2nd St SW	ND 37/1804	1.9	770	*	*	*	*	*	★★★★	2	770
2	15.03	McLean 15	ND 37/1804	19th St NW (McLean 502)	3.0	597	*	*	*	*	*	★★★★	2	597
3	15.01	McLean 15	North border of Lake Sakakawea	ND 37/1804	4.0	483	*	*	*	*	*	★★★	2	483
4	8.01	McLean 8	US 83	McLean 23	12.1	245		*		*	*	★★★★	2	245
5	12.03	McLean 12	20th Ave NW	ND 41	3.1	145			*	*	*	★★★	2	145
6	20.03	McLean 20	26th Ave SW	US 83	1.0	95			*	*	*	★★★	2	95
7	505.01	No designation	US 83	29th Ave SW	3.2	1,190	*	*	*	*	*	★★★	1	1,190
8	503.01	No designation	US 83 & ND 200	US 83 & 28th Ave NW	1.7	631	*	*	*	*	*	★★★	1	631
9	506.01	No designation	US 83	29th Ave SW	2.2	610	*	*	*	*	*	★★★	1	610
10	27.02	McLean 27	South Ave (ND 41)	McLean 12	0.7	500	*	*	*	*	*	★★★	1	500
11	17.01	McLean 17	ND 200	8th St SW	2.5	309		*	*	*	*	★★★	1	309
12	33.03	McLean 33	ND 53	30th St N (North border of McLean)	1.3	240			*	*	*	★★	2	240
13	12.04	McLean 12	ND 41	16th Ave NW (McLean 27)	1.1	230			*	*	*	★★	2	230
14	24.02	McLean 24	US 83	ND 41 & 12th St NE	2.2	213		*			*	★★	2	213
15	502.01	No designation	43rd Ave NW (McLean 23)	McLean 15	4.0	195			*		*	★★	2	195
16	27.03	McLean 27	McLean 12	11th St NW	6.0	155				*	*	★★	2	155
17	2.03	McLean 2	McLean 15	ND 53	6.1	105		*			*	★★	2	105
18	33.01	McLean 33	ND 200/41	4th Ave NW (McLean 35)	16.3	154					*	*	2	154
19	9.01	McLean 9	ND 37	373rd Ave SW/North border of McLean	7.0	77					*	*	2	77
20	23.04	McLean 23	ND 53	373rd Ave SW/North border of McLean	2.0	193		*				*	1	193
21	23.02	McLean 23	15th St NW (McLean 8)	16th St NW (McLean 8)	1.0	100			*			*	1	100
22	33.02	McLean 33	19th St NW	ND 53	10.0	95			*			*	1	95
23	20.04	McLean 20	US 83	ND 200	2.2	75			*			*	1	75
24	14.02	McLean 14	32nd Ave NW (McLean 19)	Old US 83 (McLean 503)	4.5	235							1	235
25	22.01	McLean 22	US 83	ND 41	12.7	205							1	205
26	8.02	McLean 8	McLean 23	ND 41	8.0	125							1	125
27	14.01	McLean 14	34th Ave NW	32nd Ave NW (McLean 19)	2.1	120							1	120

Total Stars -- 7 10 16 6 14
% That Gets Star -- 26% 37% 59% 22% 52%

	#	%	Mileage	%
★★★★★	0	0%	0.0	0%
★★★★	2	7%	4.9	4%
★★★	9	33%	30.5	25%
★★	6	22%	20.7	17%
*	6	22%	38.5	32%
	4	15%	27.3	22%
	27	100%	121.9	100%

Stars
 ADT Range - If segment has an ADT in the range of most at risk ADT based on statewide totals. (450 < ADT < 1000000)
 Lane Departure Density - If segment has higher lane departure density than the statewide average (0.065).
 Access Density - If segment has access density than the statewide average (6).
 Curve Critical Radius Density - If segment has higher density of curves with critical radius than the Western average (0.253).
 Edge Risk Assessment - Edge risk of 2 or 3, based on assessment of roadway edge and clear zone.

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

4th Ave SW from 2nd St SW to ND 37/1804

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Start: 2nd St SW
End: ND 37/1804
Facility Type: 2-Lane
ADT: 770
Road Type: Rural Paved
Terrain: Not Mountainous
County Road: McLean 15
Local Road: 4th Ave SW

Lane Width: 12'
Speed Limit: Low
Shoulder Width: 0'
Shoulder Type: None
Length (miles): 1.9
Rumble Installed: None
Oil Project: No

SHSP Emphasis Area (check all that apply)

- Reduce Alcohol Impaired Driving
- Increase the Use of Safety Restraints for all Occupants
- Younger Driver/Older Driver Safety
- Curb Aggressive Driving
- Improvements to Address Lane Departure Crashes
- Enhancing Emergency Medical Capabilities to Increase Survivability
- Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Road Dept	K+A
Crashes	3	1	0
Density (per mile per year)	0.32	0.11	0.00
Rate (per MVM)	1.12	0.37	0.00



	Value	Critical	Road Departure Risk Ranking
ADT Range	770	450 ≤ ADT ≤ 1000000	★
RD Density	0.105	0.065	★
Access Density	7.9	6.0	★
Curve Critical Radius Density	0.000	0.253	★
Edge Risk	2	2 or 3	★
★★★★★			

Describe Proposed Safety Improvements

Description	Type	Cost per mi	Mileage	Cost	Notes
4" Edge Lines	Proactive	\$1,320	1.3	\$ 1,680	Notes - Project not assigned for portion of segment within Garrison city limits (West of 7th St SE). Noise sensitive receiver (golf course) - no rumbles.
6" Edge Lines	Proactive	\$1,980	0.0	\$ -	
Edge Rumble Strip	Proactive	\$5,850	0.0	\$ -	
Ground In Wet-Reflective Markings	Proactive	\$36,000	0.0	\$ -	
Center Line Rumble Strip	Proactive	\$3,600	0.0	\$ -	
6" Center Line	Proactive	\$1,020	1.3	\$ 1,298	
				\$ 2,979	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 2,681
Local Match (10% of Total project cost)	\$ 298
Total Project Cost	\$ 2,979

NDDOT Central Office Only

Project Accepted? Yes No Reference Number ID Number

Notes

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

2nd St SW/41st Ave NW from ND 37/1804 to 19th St NW (McLean 502)

Agency Name: McLean County

ND DOT District: 1/4

Contact Name: Ron Wagner

Telephone Number: 701-462-8541 Ext 809

Email Address: rfwagner@nd.gov

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Start: ND 37/1804
End: 19th St NW (McLean 502)
Facility Type: 2-Lane
ADT: 597
Road Type Rural Paved
Terrain: Not Mountainous
County Road McLean 15
Local Road: 2nd St SW/41st Ave NW

Lane Width: 12'
Speed Limit: High
Shoulder Width: 0'
Shoulder Type: None
Length (miles): 3.0
Rumble Installed: None
Oil Project: No

SHSP Emphasis Area (check all that apply)

- Reduce Alcohol Impaired Driving
- Increase the Use of Safety Restraints for all Occupants
- Younger Driver/Older Driver Safety
- Curb Aggressive Driving
- Improvements to Address Lane Departure Crashes
- Enhancing Emergency Medical Capabilities to Increase Survivability
- Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Road Dept	K+A
Crashes	13	5	0
Density (per mile per year)	0.87	0.33	0.00
Rate (per MVM)	3.98	1.53	0.00



	Value	Critical	Road Departure Risk Ranking
ADT Range	597	450 ≤ ADT ≤ 1000000	★
RD Density	0.333	0.065	★
Access Density	8.0	6.0	★
Curve Critical Radius Density	0.000	0.253	★
Edge Risk	2	2 or 3	★

★★★★★

Describe Proposed Safety Improvements

Description	Type	Cost per mi	Mileage	Cost	Notes
4" Edge Lines	Proactive	\$1,320	0.0	\$ -	Notes - Portion of segment South of 6th Ave in town of Garrison - project not assigned to this portion. Noise sensitive receiver - no rumble strips
6" Edge Lines	Proactive	\$1,980	2.2	\$ 4,277	
Edge Rumble Strip	Proactive	\$5,850	0.0	\$ -	
Ground In Wet-Reflective Markings	Proactive	\$36,000	0.0	\$ -	
Center Line Rumble Strip	Proactive	\$3,600	0.0	\$ -	
6" Center Line	Proactive	\$1,020	0.0	\$ -	
				\$ 4,277	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$	3,849
Local Match (10% of Total project cost)	\$	428
Total Project Cost	\$	4,277

NDDOT Central Office Only

Project Accepted?

Yes

No

Reference Number

ID Number

Notes

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

41st Ave NW from North border of Lake Sakakawea to ND 37/1804

Agency Name: McLean County

ND DOT District: 1/4

Contact Name: Ron Wagner

Telephone Number: 701-462-8541 Ext 809

Email Address: rfwagner@nd.gov

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Start: North border of Lake Sakakawea
End: ND 37/1804
Facility Type: 2-Lane
ADT: 483
Road Type Rural Paved
Terrain: Not Mountainous
County Road McLean 15
Local Road: 41st Ave NW

Lane Width: 12'
Speed Limit: High
Shoulder Width: 0'
Shoulder Type: None
Length (miles): 4.0
Rumble Installed: None
Oil Project: No

SHSP Emphasis Area (check all that apply)

- Reduce Alcohol Impaired Driving
- Increase the Use of Safety Restraints for all Occupants
- Younger Driver/Older Driver Safety
- Curb Aggressive Driving
- Improvements to Address Lane Departure Crashes
- Enhancing Emergency Medical Capabilities to Increase Survivability
- Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Road Dept	K+A
Crashes	4	1	0
Density (per mile per year)	0.20	0.05	0.00
Rate (per MVM)	1.14	0.28	0.00



	Value	Critical	Road Departure Risk Ranking
ADT Range	483	450 ≤ ADT ≤ 1000000	★
RD Density	0.050	0.065	
Access Density	11.0	6.0	★
Curve Critical Radius Density	0.000	0.253	
Edge Risk	2	2 or 3	★
			★★★

Describe Proposed Safety Improvements

Description	Type	Cost per mi	Mileage	Cost	Notes
4" Edge Lines	Proactive	\$1,320	0.0	\$ -	Notes - Southern 0.55 miles part of Fort Stevenson St Park project not assigned to this portion. Noise sensitive receiver - no rumble strips
6" Edge Lines	Proactive	\$1,980	3.4	\$ 6,811	
Edge Rumble Strip	Proactive	\$5,850	0.0	\$ -	
Ground In Wet-Reflective Markings	Proactive	\$36,000	0.0	\$ -	
Center Line Rumble Strip	Proactive	\$3,600	0.0	\$ -	
6" Center Line	Proactive	\$1,020	0.0	\$ -	
				\$ 6,811	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 6,130
Local Match (10% of Total project cost)	\$ 681
Total Project Cost	\$ 6,811

NDDOT Central Office Only

Project Accepted?

Yes

No

Reference Number

ID Number

Notes

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

16th/17th St NW from US 83 to McLean 23

Agency Name: McLean County

ND DOT District: 1/4

Contact Name: Ron Wagner

Telephone Number: 701-462-8541 Ext 809

Email Address: rfwagner@nd.gov

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Start: US 83
End: McLean 23
Facility Type: 2-Lane
ADT: 245
Road Type Rural Paved
Terrain: Not Mountainous
County Road McLean 8
Local Road: 16th/17th St NW

Lane Width: 12'
Speed Limit: High
Shoulder Width: 0'
Shoulder Type: None
Length (miles): 12.1
Rumble Installed: None
Oil Project: No

SHSP Emphasis Area (check all that apply)

- Reduce Alcohol Impaired Driving
- Increase the Use of Safety Restraints for all Occupants
- Younger Driver/Older Driver Safety
- Curb Aggressive Driving
- Improvements to Address Lane Departure Crashes
- Enhancing Emergency Medical Capabilities to Increase Survivability
- Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Road Dept	K+A
Crashes	12	4	1
Density (per mile per year)	0.20	0.07	0.02
Rate (per MVM)	2.22	0.74	0.18



	Value	Critical	Road Departure Risk Ranking
ADT Range	245	450 ≤ ADT ≤ 1000000	
RD Density	0.066	0.065	★
Access Density	5.5	6.0	
Curve Critical Radius Density	0.496	0.253	★
Edge Risk	2	2 or 3	★
			★★★

Describe Proposed Safety Improvements

Description	Type	Cost per mi	Mileage	Cost	Notes
4" Edge Lines	Proactive	\$1,320	0.0	\$ -	Notes - Noise sensitive receiver between 30th Ave NW to Lake Audubon coastline (1.07 miles) - implement 6 in edge lines instead of rumble strips. Edge rumble strips and 6" edge line.
6" Edge Lines	Proactive	\$1,980	1.1	\$ 2,156	
Edge Rumble Strip	Proactive	\$5,850	11.0	\$ 64,414	
Ground In Wet-Reflective Markings	Proactive	\$36,000	0.0	\$ -	
Center Line Rumble Strip	Proactive	\$3,600	0.0	\$ -	
6" Center Line	Proactive	\$1,020	0.0	\$ -	
				\$ 66,571	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 59,914
Local Match (10% of Total project cost)	\$ 6,657
Total Project Cost	\$ 66,571

NDDOT Central Office Only

Project Accepted?

Yes

No

Reference Number

ID Number

Notes

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

7th St NW from 20th Ave NW to ND 41

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Start: 20th Ave NW
End: ND 41
Facility Type: 2-Lane
ADT: 145
Road Type Rural Paved
Terrain: Not Mountainous
County Road McLean 12
Local Road: 7th St NW

Lane Width: 12'
Speed Limit: High
Shoulder Width: 0'
Shoulder Type: None
Length (miles): 3.1
Rumble Installed: None
Oil Project: No

SHSP Emphasis Area (check all that apply)

- Reduce Alcohol Impaired Driving
- Increase the Use of Safety Restraints for all Occupants
- Younger Driver/Older Driver Safety
- Curb Aggressive Driving
- Improvements to Address Lane Departure Crashes
- Enhancing Emergency Medical Capabilities to Increase Survivability
- Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Road Dept	K+A
Crashes	1	0	0
Density (per mile per year)	0.06	0.00	0.00
Rate (per MVM)	1.22	0.00	0.00



	Value	Critical	Road Departure Risk Ranking
ADT Range	145	450 ≤ ADT ≤ 1000000	
RD Density	0.000	0.065	
Access Density	7.4	6.0	★
Curve Critical Radius Density	0.323	0.253	★
Edge Risk	2	2 or 3	★
			★★★

Describe Proposed Safety Improvements

Description	Type	Cost per mi	Mileage	Cost	Notes - Edge rumble strips and 6" edge line.
4" Edge Lines	Proactive	\$1,320	0.0	\$ -	
6" Edge Lines	Proactive	\$1,980	3.1	\$ 6,138	
Edge Rumble Strip	Proactive	\$5,850	0.0	\$ -	
Ground In Wet-Reflective Markings	Proactive	\$36,000	0.0	\$ -	
Center Line Rumble Strip	Proactive	\$3,600	0.0	\$ -	
6" Center Line	Proactive	\$1,020	0.0	\$ -	
				\$ 6,138	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 5,524
Local Match (10% of Total project cost)	\$ 614
Total Project Cost	\$ 6,138

NDDOT Central Office Only

Project Accepted?

Yes No

Reference Number

ID Number

Notes

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

4th St SW from 26th Ave SW to US 83

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Start: 26th Ave SW
End: US 83
Facility Type: 2-Lane
ADT: 95
Road Type Rural Paved
Terrain: Not Mountainous
County Road McLean 20
Local Road: 4th St SW

Lane Width: 12'
Speed Limit: High
Shoulder Width: 0'
Shoulder Type: None
Length (miles): 1.0
Rumble Installed: None
Oil Project: No

SHSP Emphasis Area (check all that apply)

- Reduce Alcohol Impaired Driving
- Increase the Use of Safety Restraints for all Occupants
- Younger Driver/Older Driver Safety
- Curb Aggressive Driving
- Improvements to Address Lane Departure Crashes
- Enhancing Emergency Medical Capabilities to Increase Survivability
- Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Road Dept	K+A
Crashes	0	0	0
Density (per mile per year)	0.00	0.00	0.00
Rate (per MVM)	0.00	0.00	0.00



	Value	Critical	Road Departure Risk Ranking
ADT Range	95	450 ≤ ADT ≤ 1000000	
RD Density	0.000	0.065	
Access Density	9.0	6.0	★
Curve Critical Radius Density	4.000	0.253	★
Edge Risk	2	2 or 3	★
			★★★

Describe Proposed Safety Improvements

Description	Type	Cost per mi	Mileage	Cost	Notes - Edge rumble strips and 6" edge line.
4" Edge Lines	Proactive	\$1,320	0.0	\$ -	
6" Edge Lines	Proactive	\$1,980	1.0	\$ 1,980	
Edge Rumble Strip	Proactive	\$5,850	0.0	\$ -	
Ground In Wet-Reflective Markings	Proactive	\$36,000	0.0	\$ -	
Center Line Rumble Strip	Proactive	\$3,600	0.0	\$ -	
6" Center Line	Proactive	\$1,020	0.0	\$ -	
				\$ 1,980	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$	1,782
Local Match (10% of Total project cost)	\$	198
Total Project Cost	\$	1,980

NDDOT Central Office Only

Project Accepted? Yes No Reference Number ID Number

Notes

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

3rd St SW from US 83 to 29th Ave SW

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Start: US 83
End: 29th Ave SW
Facility Type: 2-Lane
ADT: 1190
Road Type: Rural Paved
Terrain: Not Mountainous
County Road: No designation
Local Road: 3rd St SW

Lane Width: 12'
Speed Limit: High
Shoulder Width: 2'
Shoulder Type: Paved
Length (miles): 3.2
Rumble Installed: None
Oil Project: No

SHSP Emphasis Area (check all that apply)

- Reduce Alcohol Impaired Driving
- Increase the Use of Safety Restraints for all Occupants
- Younger Driver/Older Driver Safety
- Curb Aggressive Driving
- Improvements to Address Lane Departure Crashes
- Enhancing Emergency Medical Capabilities to Increase Survivability
- Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Road Dept	K+A
Crashes	12	7	0
Density (per mile per year)	0.75	0.44	0.00
Rate (per MVM)	1.73	1.01	0.00



	Value	Critical	Road Departure Risk Ranking
ADT Range	1,190	450 ≤ ADT ≤ 1000000	★
RD Density	0.438	0.065	★
Access Density	7.2	6.0	★
Curve Critical Radius Density	0.000	0.253	
Edge Risk	1	2 or 3	

★★★

Describe Proposed Safety Improvements

Description	Type	Cost per mi	Mileage	Cost	Notes - Shoulder rumble strips and 6" edge line.
4" Edge Lines	Proactive	\$1,320	0.0	\$ -	
6" Edge Lines	Proactive	\$1,980	0.0	\$ -	
Edge Rumble Strip	Proactive	\$5,850	3.2	\$ 18,720	
Ground In Wet-Reflective Markings	Proactive	\$36,000	0.0	\$ -	
Center Line Rumble Strip	Proactive	\$3,600	3.2	\$ 11,520	
6" Center Line	Proactive	\$1,020	0.0	\$ -	
				\$ 30,240	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 27,216
Local Match (10% of Total project cost)	\$ 3,024
Total Project Cost	\$ 30,240

NDDOT Central Office Only

Project Accepted? Yes No Reference Number _____ ID Number _____

Notes

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

Old US 82 from US 83 & ND 200 to US 83 & 28th Ave NW

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Start: US 83 & ND 200
End: US 83 & 28th Ave NW
Facility Type: 2-Lane
ADT: 631
Road Type: Rural Paved
Terrain: Not Mountainous
County Road: No designation
Local Road: Old US 82

Lane Width: 12'
Speed Limit: Low
Shoulder Width: 2'
Shoulder Type: Paved
Length (miles): 1.7
Rumble Installed: None
Oil Project: No

SHSP Emphasis Area (check all that apply)

- Reduce Alcohol Impaired Driving
- Increase the Use of Safety Restraints for all Occupants
- Younger Driver/Older Driver Safety
- Curb Aggressive Driving
- Improvements to Address Lane Departure Crashes
- Enhancing Emergency Medical Capabilities to Increase Survivability
- Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Road Dept	K+A
Crashes	11	3	3
Density (per mile per year)	1.29	0.35	0.35
Rate (per MVM)	5.62	1.53	1.53



	Value	Critical	Road Departure Risk Ranking
ADT Range	631	450 ≤ ADT ≤ 1000000	★
RD Density	0.353	0.065	★
Access Density	12.4	6.0	★
Curve Critical Radius Density	0.000	0.253	
Edge Risk	1	2 or 3	

★★★

Describe Proposed Safety Improvements

Description	Type	Cost per mi	Mileage	Cost	Notes - Noise sensitive receiver - no rumble strips
4" Edge Lines	Proactive	\$1,320	0.0	\$ -	
6" Edge Lines	Proactive	\$1,980	1.7	\$ 3,366	
Edge Rumble Strip	Proactive	\$5,850	0.0	\$ -	
Ground In Wet-Reflective Markings	Proactive	\$36,000	0.0	\$ -	
Center Line Rumble Strip	Proactive	\$3,600	0.0	\$ -	
6" Center Line	Proactive	\$1,020	0.0	\$ -	
				\$ 3,366	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$	3,029
Local Match (10% of Total project cost)	\$	337
Total Project Cost	\$	3,366

NDDOT Central Office Only

Project Accepted? Yes No Reference Number ID Number

Notes

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

1st St NW from US 83 to 29th Ave SW

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Start: US 83
End: 29th Ave SW
Facility Type: 2-Lane
ADT: 610
Road Type: Rural Paved
Terrain: Not Mountainous
County Road: No designation
Local Road: 1st St NW

Lane Width: 12'
Speed Limit: High
Shoulder Width: 2'
Shoulder Type: Paved
Length (miles): 2.2
Rumble Installed: None
Oil Project: No

SHSP Emphasis Area (check all that apply)

- Reduce Alcohol Impaired Driving
- Increase the Use of Safety Restraints for all Occupants
- Younger Driver/Older Driver Safety
- Curb Aggressive Driving
- Improvements to Address Lane Departure Crashes
- Enhancing Emergency Medical Capabilities to Increase Survivability
- Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Road Dept	K+A
Crashes	1	0	0
Density (per mile per year)	0.09	0.00	0.00
Rate (per MVM)	0.41	0.00	0.00



	Value	Critical	Road Departure Risk
ADT Range	610	450 ≤ ADT ≤ 1000000	★
RD Density	0.000	0.065	
Access Density	6.4	6.0	★
Curve Critical Radius Density	1.818	0.253	★
Edge Risk	1	2 or 3	
★★★			

Describe Proposed Safety Improvements

Description	Type	Cost per mi	Mileage	Cost	Notes - Shoulder rumble strips and 6" edge line.
4" Edge Lines	Proactive	\$1,320	0.0	\$ -	
6" Edge Lines	Proactive	\$1,980	0.0	\$ -	
Edge Rumble Strip	Proactive	\$5,850	2.2	\$ 12,870	
Ground In Wet-Reflective Markings	Proactive	\$36,000	0.0	\$ -	
Center Line Rumble Strip	Proactive	\$3,600	0.0	\$ -	
6" Center Line	Proactive	\$1,020	0.0	\$ -	
				\$ 12,870	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 11,583
Local Match (10% of Total project cost)	\$ 1,287
Total Project Cost	\$ 12,870

NDDOT Central Office Only

Project Accepted?

Yes No

Reference Number

ID Number

Notes

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

8th St SW from ND 200 to 8th St SW

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Start: ND 200
End: 8th St SW
Facility Type: 2-Lane
ADT: 309
Road Type: Rural Paved
Terrain: Not Mountainous
County Road: McLean 17
Local Road: 8th St SW

Lane Width: 12'
Speed Limit: High
Shoulder Width: 2'
Shoulder Type: Paved
Length (miles): 2.5
Rumble Installed: None
Oil Project: No

SHSP Emphasis Area (check all that apply)

- Reduce Alcohol Impaired Driving
- Increase the Use of Safety Restraints for all Occupants
- Younger Driver/Older Driver Safety
- Curb Aggressive Driving
- Improvements to Address Lane Departure Crashes
- Enhancing Emergency Medical Capabilities to Increase Survivability
- Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Road Dept	K+A
Crashes	13	4	0
Density (per mile per year)	1.04	0.32	0.00
Rate (per MVM)	9.22	2.84	0.00



	Value	Critical	Road Departure Risk Ranking
ADT Range	309	450 ≤ ADT ≤ 1000000	
RD Density	0.320	0.065	★
Access Density	11.6	6.0	★
Curve Critical Radius Density	0.400	0.253	★
Edge Risk	1	2 or 3	

Describe Proposed Safety Improvements

Description	Type	Cost per mi	Mileage	Cost	Notes - Noise sensitive receiver - no rumble strips.
4" Edge Lines	Proactive	\$1,320	0.0	\$ -	
6" Edge Lines	Proactive	\$1,980	2.5	\$ 4,950	
Edge Rumble Strip	Proactive	\$5,850	0.0	\$ -	
Ground In Wet-Reflective Markings	Proactive	\$36,000	0.0	\$ -	
Center Line Rumble Strip	Proactive	\$3,600	0.0	\$ -	
6" Center Line	Proactive	\$1,020	0.0	\$ -	
				\$ 4,950	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 4,455
Local Match (10% of Total project cost)	\$ 495
Total Project Cost	\$ 4,950

NDDOT Central Office Only

Project Accepted? Yes No Reference Number ID Number

Notes

**McLean County
Curve Projects**

Page	Corridor ID	# of Curves	Route #	Start	End	Chevron	Arrow Board	Shoulder Pave	Edge Rumble Strips	Advanced Sign/Speed Plaque	Project \$
1	8.01	8	McLean 8	US 83	McLean 23	\$ -	\$ -	\$ -	\$ 2,926	\$ 1,440	\$ 4,366
2	12.03	1	McLean 12	20th Ave NW	ND 41	\$ -	\$ -	\$ -	\$ 522	\$ -	\$ 522
3	17.01	4	McLean 17	ND 200	8th St SW	\$ 3,960	\$ -	\$ -	\$ 3,179	\$ 1,440	\$ 8,579
4	20.03	4	McLean 20	26th Ave SW	US 83	\$ -	\$ -	\$ -	\$ -	\$ 5,760	\$ 5,760
5	22.01	6	McLean 22	US 83	ND 41	\$ 3,960	\$ -	\$ -	\$ 5,607	\$ -	\$ 9,567
6	27.03	5	McLean 27	McLean 12	11th St NW	\$ -	\$ -	\$ -	\$ 6,682	\$ 5,760	\$ 12,442
7	33.01	4	McLean 33	ND 200/41	4th Ave NW (McLean 35)	\$ -	\$ -	\$ -	\$ 3,129	\$ -	\$ 3,129
8	506.01	4	No designation	US 83	29th Ave SW	\$ -	\$ -	\$ -	\$ 3,415	\$ 1,440	\$ 4,855
23 USC 409 NDDOT Reserves All Objections						\$ 7,920	\$ -	\$ -	\$ 25,461	\$ 15,840	\$ 49,221

McLean County Curves

Curve Count	ID	Corridor	Segment	Start	End	Inside	Outside							Oil County Project	Proposed Warning Sign Type	Proposed Advisory Speed	Proposed Chevrons	Crashes		Radius (ft)	ADT	Intersection on Curve	Visual Trap	Speed Limit	Risk Ranking	Notes	
						Shoulder Type	Shoulder Type	Isolated Curve	Curve Warning Sign	Warning Sign Type	Speed Advisory Sign	Advisory Speed	Arrow Board					Chevrons	Total								Total Severe
1	0002A	2.03	McLean 2	McLean 15	ND 53	None	None	Yes	Yes	Curve Warning	No	No	No	No				-	-	5097	105	No	No	High			
2	0002B	2.03	McLean 2	McLean 15	ND 53	None	None	No	Yes	Winding Road	No	No	No	No				-	-	5067	105	No	No	High	*		
3	0002C	2.03	McLean 2	McLean 15	ND 53	None	None	No	Yes	Winding Road	No	No	No	No				-	-	3701	105	Yes	No	High	*		
4	0002D	2.03	McLean 2	McLean 15	ND 53	None	None	No	Yes	Winding Road	No	No	No	No				-	-	5033	105	No	No	High			
5	0008A	8.01	McLean 8	US 83	McLean 23	None	None	Yes	Yes	Curve Warning	No	No	No	Yes	Curve Warning		Yes	-	-	1146	245	Yes	Yes	High	★★★		
6	0008B	8.01	McLean 8	US 83	McLean 23	None	None	Yes	Yes	Curve Warning	No	No	No	Yes	Curve Warning		Yes	1	-	1163	245	Yes	Yes	High	★★★		
7	0008C	8.01	McLean 8	US 83	McLean 23	None	None	No	Yes	Winding Road	No	No	No	No				-	-	2965	245	Yes	No	High	*		
8	0008D	8.01	McLean 8	US 83	McLean 23	None	None	No	Yes	Winding Road	No	No	No	No				-	-	3190	245	Yes	No	High	*		
9	0008E	8.01	McLean 8	US 83	McLean 23	None	None	No	Yes	S-Curve	No	No	No	Yes	Winding Road		Yes	1	-	1137	245	Yes	No	High	★★		
10	0008F	8.01	McLean 8	US 83	McLean 23	None	None	No	Yes	S-Curve	Yes	No	No	Yes	Winding Road	45	Yes	-	-	1125	245	Yes	No	High	★★		
11	0008G	8.01	McLean 8	US 83	McLean 23	None	None	No	Yes	Curve Warning	No	No	Yes	Yes	Winding Road	45	Yes	-	-	1017	245	No	No	High	*		
12	0008H	8.01	McLean 8	US 83	McLean 23	None	None	No	Yes	Curve Warning	No	No	No	Yes	Curve Warning		Yes	-	-	1139	245	Yes	Yes	High	★★★		
13	0008I	8.02	McLean 8	McLean 23	ND 41	Paved	Paved	No	Yes	Winding Road	No	No	No	Yes	Winding Road		Yes	-	-	1497	125	No	No	High		OCP - White Delineators Type D	
14	0008J	8.02	McLean 8	McLean 23	ND 41	Paved	Paved	No	Yes	Winding Road	No	No	No	Yes	Winding Road		No	-	-	1826	125	No	No	High		OCP - White Delineators Type D	
15	0008K	8.02	McLean 8	McLean 23	ND 41	Paved	Paved	No	Yes	Winding Road	No	No	No	Yes	Winding Road		No	-	-	1237	125	Yes	No	High	*		
16	0012A	12.03	McLean 12	20th Ave NW	ND 41	None	None	Yes	Yes	Curve Warning	No	No	No	Yes	Curve Warning		Yes	-	-	1168	145	Yes	Yes	High	★★★		
17	0012B	12.04	McLean 12	ND 41	16th Ave NW (McLean 27)	None	None	Yes	No		No	No	No	No				-	-	1716	230	No	No	Low			
18	0015A	15.03	McLean 15	ND 37/1804	19th St NW (McLean 502)	None	None	No	No	S-Curve	No	No	No	Yes	S-Curve		Yes	-	-	1456	597	No	No	High	*		
19	0015B	15.03	McLean 15	ND 37/1804	19th St NW (McLean 502)	None	None	No	Yes	S-Curve	No	No	No	Yes	S-Curve		Yes	-	-	1475	597	No	No	High	*		
20	0017A	17.01	McLean 17	ND 200	8th St SW	Paved	Paved	No	Yes	Winding Road	Yes	45	No	No	Yes	Winding Road	45	No	1	-	2177	309	No	No	High		
21	0017B	17.01	McLean 17	ND 200	8th St SW	Paved	Paved	No	Yes	Winding Road	Yes	45	No	No	Yes	Winding Road	45	Yes	-	-	1093	309	No	No	High	*	
22	0017C	17.01	McLean 17	ND 200	8th St SW	Paved	Paved	No	Yes	Winding Road	Yes	45	No	No	Yes	Winding Road	45	No	1	-	1739	309	Yes	No	High	*	OCP - White Delineators Type D
23	0017D	17.01	McLean 17	ND 200	8th St SW	Paved	Paved	Yes	No		No	No	No	No				1	-	1210	309	Yes	No	Low	*		
24	0020A	20.03	McLean 20	26th Ave SW	US 83	None	None	No	Yes	Winding Road	No	No	No	Yes	Winding Road	40	Yes	-	-	559	95	Yes	No	High	★★		
25	0020B	20.03	McLean 20	26th Ave SW	US 83	None	None	No	Yes	Winding Road	No	No	No	Yes	Winding Road	40	Yes	-	-	561	95	No	No	High	*		
26	0020C	20.03	McLean 20	26th Ave SW	US 83	None	None	No	Yes	Winding Road	No	No	No	Yes	Winding Road	40	Yes	-	-	699	95	No	No	High	*		
27	0020D	20.03	McLean 20	26th Ave SW	US 83	None	None	No	Yes	Winding Road	No	No	No	Yes	Winding Road	40	Yes	-	-	704	95	Yes	No	High	★★		
28	0022A	22.01	McLean 22	US 83	ND 41	Paved	Paved	No	Yes	Winding Road	No	No	No	Yes	Winding Road		No	-	-	3031	205	No	No	High			
29	0022B	22.01	McLean 22	US 83	ND 41	Paved	Paved	No	Yes	Winding Road	No	No	No	Yes	Winding Road		Yes	-	-	1141	205	Yes	No	High	★★		
30	0022C	22.01	McLean 22	US 83	ND 41	Paved	Paved	No	Yes	Winding Road	No	No	No	Yes	Winding Road		Yes	-	-	1240	205	Yes	No	High	*		
31	0022D	22.01	McLean 22	US 83	ND 41	Paved	Paved	No	Yes	Winding Road	Yes	45	No	No	Yes	Winding Road	45	Yes	-	-	1286	205	No	No	High		
32	0022E	22.01	McLean 22	US 83	ND 41	Paved	Paved	No	Yes	Winding Road	Yes	46	No	No	Yes	Winding Road	45	Yes	-	-	1171	205	No	No	High	*	
33	0022F	22.01	McLean 22	US 83	ND 41	Paved	Paved	No	Yes	Winding Road	Yes	47	No	No	Yes	Winding Road	45	Yes	-	-	1126	205	No	No	High	*	
34	0024A	24.02	McLean 24	US 83	ND 41 & 12th St NE	None	None	Yes	No		No	No	No	No				1	-	1408	213	No	No	High			
35	0027A	27.03	McLean 27	McLean 12	11th St NW	None	None	No	Yes	Winding Road	Yes	45	No	No	Yes	Winding Road	45	Yes	-	-	906	155	No	No	High	*	
36	0027B	27.03	McLean 27	McLean 12	11th St NW	None	None	No	Yes	Winding Road	Yes	45	No	No	Yes	Winding Road	45	Yes	-	-	839	155	Yes	No	High	★★	
37	0027C	27.03	McLean 27	McLean 12	11th St NW	None	None	No	Yes	Winding Road	Yes	45	No	No	Yes	Winding Road	45	Yes	-	-	819	155	No	No	High	*	
38	0027D	27.03	McLean 27	McLean 12	11th St NW	None	None	No	Yes	Winding Road	Yes	45	No	No	Yes	Winding Road	45	Yes	-	-	1080	155	Yes	No	High	★★	
39	0027E	27.03	McLean 27	McLean 12	11th St NW	None	None	Yes	Yes	Curve Warning	No	No	No	Yes	Curve Warning		Yes	-	-	1281	155	Yes	Yes	High	★★		
40	0033A	33.01	McLean 33	ND 200/41	4th Ave NW (McLean 35)	None	None	No	Yes	S-Curve	No	No	No	No				-	-	3919	154	No	No	High			
41	0033B	33.01	McLean 33	ND 200/41	4th Ave NW (McLean 35)	None	None	No	Yes	S-Curve	No	No	No	No				-	-	3996	154	No	No	High			
42	0033C	33.01	McLean 33	ND 200/41	4th Ave NW (McLean 35)	None	None	Yes	Yes	Curve Warning	No	No	No	Yes	Curve Warning		Yes	1	-	1151	154	Yes	Yes	Low	★★★		
43	0033D	33.01	McLean 33	ND 200/41	4th Ave NW (McLean 35)	None	None	Yes	Yes	Curve Warning	Yes	45	No	No	Yes	Curve Warning	45	Yes	3	-	1137	154	Yes	Yes	High	★★★	
44	0503A	503.01	No designation	US 83 & ND 200	US 83 & 28th Ave NW	Paved	Paved	Yes	Yes	Curve Warning	No	No	No	Yes	Curve Warning		No	1	-	1858	631	Yes	No	Low	★★	OCP - White Delineators Type D	
45	0503B	503.01	No designation	US 83 & ND 200	US 83 & 28th Ave NW	Paved	Paved	Yes	Yes	Curve Warning	No	No	No	No				-	-	2216	631	Yes	Yes	Low	★★★		
46	0506A	506.01	No designation	US 83	29th Ave SW	Paved	Paved	No	Yes	Winding Road	No	No	No	Yes	Curve Warning		Yes	-	-	1132	610	No	No	High	★★		
47	0506B	506.01	No designation	US 83	29th Ave SW	Paved	Paved	No	Yes	Winding Road	No	No	No	Yes	S-Curve		Yes	-	-	886	610	No	No	High	★★		
48	0506C	506.01	No designation	US 83	29th Ave SW	Paved	Paved	No	Yes	Winding Road	No	No	No	Yes	S-Curve		Yes	-	-	1115	610	No	No	High	★★		
49	0506D	506.01	No designation	US 83	29th Ave SW	Paved	Paved	No	Yes	Winding Road	No	No	No	Yes	S-Curve		Yes	-	-	1175	610	Yes	Yes	High	★★★★		

Critical Ranges	Min	Max
Radius	500	1,200
ADT	450	1,000,000

Stars	Total		Chevroned
	#	%	(% of Stars)
★★★★★	0	0%	0%
★★★★	1	2%	0%
★★★	7	14%	0%
★★	12	24%	0%
★	17	35%	6%
	12	24%	0%
	49	100%	2%

23 USC 409
DDOT Reserves All Objector

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

Curves on 16th/17th St NW from US 83 to McLean 23

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description (Corridor Containing Curves)

Start: US 83
End: McLean 23
Facility Type: 2-Lane
ADT: 245
Road Type: Rural Paved
Terrain: Not Mountainous
County Road: McLean 8
Local Road: 16th/17th St NW

Lane Width: 12'
Speed Limit: High
Shoulder Width: 0'
Shoulder Type: None
Length (miles): 12.1
Rumble Installed: None
Edge Line Installed: Yes

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013 5 years

Curve ID	Oil Proj	K	A	Radius (ft)	ADT	Intersection on Curve	Visual Trap	Risk Ranking	Proximity	Existing Arrow Board	Existing Chevrons	Critical Radius	Sign Improvement Project	Shoulder Paving Project	Shoulder Rumble Strip Project	Advance Horizontal Alignment Warning Sign	Advisory Speed Plaque
0008A	Yes	0	0	1146	245	Yes	Yes	***	0	-	-	x	-	-	Inside/Outside	-	-
0008B	Yes	0	0	1163	245	Yes	Yes	***	0	-	-	x	-	-	Inside/Outside	-	-
0008C	No	0	0	2965	245	Yes	No	*	0	-	-	-	-	-	-	-	-
0008D	No	0	0	3190	245	Yes	No	*	0	-	-	-	-	-	-	-	-
0008E	Yes	0	0	1137	245	Yes	No	**	0	-	-	x	-	-	-	-	-
0008F	Yes	0	0	1125	245	Yes	No	**	0	-	-	x	-	-	-	-	-
0008G	Yes	0	0	1017	245	No	No	*	0	-	x	x	-	-	-	x	50
0008H	Yes	0	0	1139	245	Yes	Yes	***	0	-	-	x	-	-	Inside/Outside	-	-

*Curve numbering not consecutive, as some curves may have been removed from further analysis because a large radius, located on a gravel road, etc

Ranking Criteria

Criteria	Curves are selected for project if:
Severe Crashes > 0	- 3 or more *s
Radius 500 to 1200	- x in Proximity or Existing Chevron column
ADT 450 to 1000000	- within Critical Radius
Intersection on Curve Yes	
Visual Trap Yes	

Describe Proposed Safety Improvements

Description	Type	Unit Cost	Quantity	Total cost	Notes
Chevrons	Proactive	\$3,960 per curve	0	\$ -	Notes - Oil county projects recently implemented chevrons on all warranted curves within this corridor.
Arrow Board Only	Proactive	\$1,200 per curve	0	\$ -	
Advance Warning Sign/Speed Advisory Plaque	Proactive	\$1,440 per curve	1	\$ 1,440	
Shoulder Rumble Strip	Proactive	\$5,850 per mile	.5 miles	\$ 2,926	
Shoulder Paving	Proactive	\$54,000 per mile	.0 miles	\$ -	
				\$ 4,366	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 3,929
Local Match (10% of Total project cost)	\$ 437
Total Project Cost	\$ 4,366

NDDOT Central Office Only

Project Accepted? Yes No Reference Number ID Number

Notes

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

Curves on 7th St NW from 20th Ave NW to ND 41

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rf Wagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description (Corridor Containing Curves)

Start: 20th Ave NW
End: ND 41
Facility Type: 2-Lane
ADT: 145
Road Type: Rural Paved
Terrain: Not Mountainous
County Road: McLean 12
Local Road: 7th St NW

Lane Width: 12'
Speed Limit: High
Shoulder Width: 0'
Shoulder Type: None
Length (miles): 3.1
Rumble Installed: None
Edge Line Installed: Yes

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013 5 years

Curve ID	Oil Proj	K	A	Radius (ft)	ADT	Intersection on Curve	Visual Trap	Risk Ranking	Proximity	Existing Arrow Board	Existing Chevrons	Critical Radius	Sign Improvement Project	Shoulder Paving Project	Shoulder Rumble Strip Project	Advance Horizontal Alignment Warning Sign	Advisory Speed Plaque
0012A	Yes	0	0	1168	145	Yes	Yes	***	0	-	-	x	-	-	Inside/Outside	-	-

*Curve numbering not consecutive, as some curves may have been removed from further analysis because a large radius, located on a gravel road, etc

Ranking Criteria

Criteria	Criteria
Severe Crashes	> 0
Radius	500 to 1200
ADT	450 to 1000000
Intersection on Curve	Yes
Visual Trap	Yes

Curves are selected for project if:
- 3 or more *s
- x in Proximity or Existing Chevron column
- within Critical Radius

Describe Proposed Safety Improvements

Description	Type	Unit Cost	Quantity	Total cost	Notes
Chevrons	Proactive	\$3,960 per curve	0	\$ -	Notes - Oil county projects recently implemented chevrons on all warranted curves within this corridor.
Arrow Board Only	Proactive	\$1,200 per curve	0	\$ -	
Advance Warning Sign/Speed Advisory Plaque	Proactive	\$1,440 per curve	0	\$ -	
Shoulder Rumble Strip	Proactive	\$5,850 per mile	.1 miles	\$ 522	
Shoulder Paving	Proactive	\$54,000 per mile	.0 miles	\$ -	
				\$ 522	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 470
Local Match (10% of Total project cost)	\$ 52
Total Project Cost	\$ 522

NDDOT Central Office Only

Project Accepted? Yes No Reference Number ID Number

Notes

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

Curves on 8th St SW from ND 200 to 8th St SW

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rf Wagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description (Corridor Containing Curves)

Start: ND 200
End: 8th St SW
Facility Type: 2-Lane
ADT: 309
Road Type: Rural Paved
Terrain: Not Mountainous
County Road: McLean 17
Local Road: 8th St SW

Lane Width: 12'
Speed Limit: High
Shoulder Width: 2'
Shoulder Type: Paved
Length (miles): 2.5
Rumble Installed: None
Edge Line Installed: Yes

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013 5 years

Curve ID	Oil Proj	K	A	Radius (ft)	ADT	Intersection on Curve	Visual Trap	Risk Ranking	Proximity	Existing Arrow Board	Existing Chevrons	Critical Radius	Sign Improvement Project	Shoulder Paving Project	Shoulder Rumble Strip Project	Advance Horizontal Alignment Warning Sign	Advisory Speed Plaque
0017A	Yes	0	0	2177	309	No	No		x	-	-	-	-	-	Inside/Outside	-	-
0017B	Yes	0	0	1093	309	No	No	*	0	-	-	x	Chevron	-	Inside/Outside	x	50
0017C	Yes	0	0	1739	309	Yes	No	*	x	-	-	-	-	-	Inside/Outside	-	-
0017D	No	0	0	1210	309	Yes	No	*	0	-	-	-	-	-	-	-	-

*Curve numbering not consecutive, as some curves may have been removed from further analysis because a large radius, located on a gravel road, etc

Ranking Criteria

Criteria	Criteria
Severe Crashes	> 0
Radius	500 to 1200
ADT	450 to 1000000
Intersection on Curve	Yes
Visual Trap	Yes

Curves are selected for project if:
- 3 or more *s
- x in Proximity or Existing Chevron column
- within Critical Radius

Describe Proposed Safety Improvements

Description	Type	Unit Cost	Quantity	Total cost	Notes -
Chevrons	Proactive	\$3,960 per curve	1	\$ 3,960	
Arrow Board Only	Proactive	\$1,200 per curve	0	\$ -	
Advance Warning Sign/Speed Advisory Plaque	Proactive	\$1,440 per curve	1	\$ 1,440	
Shoulder Rumble Strip	Proactive	\$5,850 per mile	.5 miles	\$ 3,179	
Shoulder Paving	Proactive	\$54,000 per mile	.0 miles	\$ -	
				\$ 8,579	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 7,721
Local Match (10% of Total project cost)	\$ 858
Total Project Cost	\$ 8,579

NDDOT Central Office Only

Project Accepted? Yes No Reference Number ID Number

Notes

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

Curves on 4th St SW from 26th Ave SW to US 83

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rf Wagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description (Corridor Containing Curves)

Start: 26th Ave SW
End: US 83
Facility Type: 2-Lane
ADT: 95
Road Type: Rural Paved
Terrain: Not Mountainous
County Road: McLean 20
Local Road: 4th St SW

Lane Width: 12'
Speed Limit: High
Shoulder Width: 0'
Shoulder Type: None
Length (miles): 1.0
Rumble Installed: None
Edge Line Installed: Yes

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

Curve ID	Oil Proj	K	A	Radius (ft)	ADT	Intersection on Curve	Visual Trap	Risk Ranking	Proximity	Existing Arrow Board	Existing Chevrons	Critical Radius	Sign Improvement Project	Shoulder Paving Project	Shoulder Rumble Strip Project	Advance Horizontal Alignment Warning Sign	Advisory Speed Plaque
0020A	Yes	0	0	559	95	Yes	No	**	0	-	-	x	-	-	-	x	40
0020B	Yes	0	0	561	95	No	No	*	0	-	-	x	-	-	-	x	40
0020C	Yes	0	0	699	95	No	No	*	0	-	-	x	-	-	-	x	40
0020D	Yes	0	0	704	95	Yes	No	**	0	-	-	x	-	-	-	x	45

*Curve numbering not consecutive, as some curves may have been removed from further analysis because a large radius, located on a gravel road, etc

Ranking Criteria

Criteria	Curves are selected for project if:
Severe Crashes > 0	- 3 or more *s
Radius 500 to 1200	- x in Proximity or Existing Chevron column
ADT 450 to 1000000	- within Critical Radius
Intersection on Curve Yes	
Visual Trap Yes	

Describe Proposed Safety Improvements

Description	Type	Unit Cost	Quantity	Total cost	Notes
Chevrons	Proactive	\$3,960 per curve	0	\$ -	Notes - Oil county projects recently implemented chevrons on all warranted curves within this corridor.
Arrow Board Only	Proactive	\$1,200 per curve	0	\$ -	
Advance Warning Sign/Speed Advisory Plaque	Proactive	\$1,440 per curve	4	\$ 5,760	
Shoulder Rumble Strip	Proactive	\$5,850 per mile	.0 miles	\$ -	
Shoulder Paving	Proactive	\$54,000 per mile	.0 miles	\$ -	
				\$ 5,760	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 5,184
Local Match (10% of Total project cost)	\$ 576
Total Project Cost	\$ 5,760

NDDOT Central Office Only

Project Accepted? Yes No Reference Number _____ ID Number _____

Notes

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

Curves on 9th St SW from US 83 to ND 41

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description (Corridor Containing Curves)

Start: US 83
End: ND 41
Facility Type: 2-Lane
ADT: 205
Road Type: Rural Paved
Terrain: Not Mountainous
County Road: McLean 22
Local Road: 9th St SW

Lane Width: 12'
Speed Limit: High
Shoulder Width: 2'
Shoulder Type: Paved
Length (miles): 12.7
Rumble Installed: None
Edge Line Installed: Yes

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

Curve ID	Oil Proj	K	A	Radius (ft)	ADT	Intersection on Curve	Visual Trap	Risk Ranking	Proximity	Existing Arrow Board	Existing Chevrons	Critical Radius	Sign Improvement Project	Shoulder Paving Project	Shoulder Rumble Strip Project	Advance Horizontal Alignment Warning Sign	Advisory Speed Plaque
0022A	Yes	0	0	3031	205	No	No		0	-	-	-	-	-	-	-	-
0022B	Yes	0	0	1141	205	Yes	No	**	0	-	-	x	-	-	-	-	-
0022C	Yes	0	0	1240	205	Yes	No	*	x	-	-	-	Chevron	-	-	-	-
0022D	Yes	0	0	1286	205	No	No	*	x	-	-	-	-	-	-	-	-
0022E	Yes	0	0	1171	205	No	No	*	0	-	-	x	-	-	-	-	-
0022F	Yes	0	0	1126	205	No	No	*	0	-	-	x	-	-	-	-	-

*Curve numbering not consecutive, as some curves may have been removed from further analysis because a large radius, located on a gravel road, etc

Ranking Criteria

Criteria	Curves are selected for project if:
Severe Crashes > 0	- 3 or more *s
Radius 500 to 1200	- x in Proximity or Existing Chevron column
ADT 450 to 1000000	- within Critical Radius
Intersection on Curve Yes	
Visual Trap Yes	

Describe Proposed Safety Improvements

Description	Type	Unit Cost	Quantity	Total cost	Notes
Chevrons	Proactive	\$3,960 per curve	1	\$ 3,960	Notes - Oil county projects recently implemented chevrons on all warranted curves where chevrons are not assigned within this corridor.
Arrow Board Only	Proactive	\$1,200 per curve	0	\$ -	
Advance Warning Sign/Speed Advisory Plaque	Proactive	\$1,440 per curve	0	\$ -	
Shoulder Rumble Strip	Proactive	\$5,850 per mile	1.0 miles	\$ 5,607	
Shoulder Paving	Proactive	\$54,000 per mile	.0 miles	\$ -	
				\$ 9,567	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 8,611
Local Match (10% of Total project cost)	\$ 957
Total Project Cost	\$ 9,567

NDDOT Central Office Only

Project Accepted? Yes No Reference Number _____ ID Number _____

Notes

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

Curves on 16th/14th Ave NW from McLean 12 to 11th St NW

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rf Wagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description (Corridor Containing Curves)

Start: McLean 12
End: 11th St NW
Facility Type: 2-Lane
ADT: 155
Road Type Rural Paved
Terrain: Not Mountainous
County Road McLean 27
Local Road: 16th/14th Ave NW

Lane Width: 12'
Speed Limit: High
Shoulder Width: 0'
Shoulder Type: None
Length (miles): 6.0
Rumble Installed: None
Edge Line Installed: Yes

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

Curve ID	Oil Proj	K	A	Radius (ft)	ADT	Intersection on Curve	Visual Trap	Risk Ranking	Proximity	Existing Arrow Board	Existing Chevrons	Critical Radius	Sign Improvement Project	Shoulder Paving Project	Shoulder Rumble Strip Project	Advance Horizontal Alignment Warning Sign	Advisory Speed Plaque	
0027A	Yes	0	0	906	155	No	No	*	0	-	-	x	-	-	-	Inside/Outside	x	50
0027B	Yes	0	0	839	155	Yes	No	**	0	-	-	x	-	-	-	Inside/Outside	x	45
0027C	Yes	0	0	819	155	No	No	*	0	-	-	x	-	-	-	Inside/Outside	x	45
0027D	Yes	0	0	1080	155	Yes	No	**	0	-	-	x	-	-	-	Inside/Outside	x	50
0027E	Yes	0	0	1281	155	Yes	Yes	**	0	-	-	-	-	-	-	-	-	-

*Curve numbering not consecutive, as some curves may have been removed from further analysis because a large radius, located on a gravel road, etc

Ranking Criteria

Criteria	Curves are selected for project if:
Severe Crashes > 0	- 3 or more *s
Radius 500 to 1200	- x in Proximity or Existing Chevron column
ADT 450 to 1000000	- within Critical Radius
Intersection on Curve Yes	
Visual Trap Yes	

Describe Proposed Safety Improvements

Description	Type	Unit Cost	Quantity	Total cost	Notes
Chevrons	Proactive	\$3,960 per curve	0	\$ -	Notes - Oil county projects recently implemented chevrons on all warranted curves within this corridor.
Arrow Board Only	Proactive	\$1,200 per curve	0	\$ -	
Advance Warning Sign/Speed Advisory Plaque	Proactive	\$1,440 per curve	4	\$ 5,760	
Shoulder Rumble Strip	Proactive	\$5,850 per mile	1.1 miles	\$ 6,682	
Shoulder Paving	Proactive	\$54,000 per mile	.0 miles	\$ -	
				\$ 12,442	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 11,198
Local Match (10% of Total project cost)	\$ 1,244
Total Project Cost	\$ 12,442

NDDOT Central Office Only

Project Accepted? Yes No Reference Number _____ ID Number _____

Notes

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

Curves on 8th Ave NW from ND 200/41 to 4th Ave NW (McLean 35)

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rf Wagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description (Corridor Containing Curves)

Start: ND 200/41
End: 4th Ave NW (McLean 35)
Facility Type: 2-Lane
ADT: 154
Road Type: Rural Paved
Terrain: Not Mountainous
County Road: McLean 33
Local Road: 8th Ave NW

Lane Width: 12'
Speed Limit: High
Shoulder Width: 0'
Shoulder Type: None
Length (miles): 16.3
Rumble Installed: None
Edge Line Installed: Yes

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

Curve ID	Oil Proj	K	A	Radius (ft)	ADT	Intersection on Curve	Visual Trap	Risk Ranking	Proximity	Existing Arrow Board	Existing Chevrons	Critical Radius	Sign Improvement Project	Shoulder Paving Project	Shoulder Rumble Strip Project	Advance Horizontal Alignment Warning Sign	Advisory Speed Plaque
0033A	No	0	0	3919	154	No	No		0	-	-	-	-	-	-	-	-
0033B	No	0	0	3996	154	No	No		0	-	-	-	-	-	-	-	-
0033C	Yes	0	0	1151	154	Yes	Yes	***	0	-	-	x	-	-	Inside/Outside	-	-
0033D	Yes	0	0	1137	154	Yes	Yes	***	0	-	-	x	-	-	Inside/Outside	-	-

*Curve numbering not consecutive, as some curves may have been removed from further analysis because a large radius, located on a gravel road, etc

Ranking Criteria

Criteria	Curves are selected for project if:
Severe Crashes > 0	- 3 or more *s
Radius 500 to 1200	- x in Proximity or Existing Chevron column
ADT 450 to 1000000	- within Critical Radius
Intersection on Curve Yes	
Visual Trap Yes	

Describe Proposed Safety Improvements

Description	Type	Unit Cost	Quantity	Total cost	Notes
Chevrons	Proactive	\$3,960 per curve	0	\$ -	Notes - Oil county projects recently implemented chevrons on all warranted curves within this corridor.
Arrow Board Only	Proactive	\$1,200 per curve	0	\$ -	
Advance Warning Sign/Speed Advisory Plaque	Proactive	\$1,440 per curve	0	\$ -	
Shoulder Rumble Strip	Proactive	\$5,850 per mile	.5 miles	\$ 3,129	
Shoulder Paving	Proactive	\$54,000 per mile	.0 miles	\$ -	
				\$ 3,129	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 2,816
Local Match (10% of Total project cost)	\$ 313
Total Project Cost	\$ 3,129

NDDOT Central Office Only

Project Accepted? Yes No Reference Number _____ ID Number _____

Notes

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

Curves on 1st St NW from US 83 to 29th Ave SW

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rf Wagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description (Corridor Containing Curves)

Start: US 83
End: 29th Ave SW
Facility Type: 2-Lane
ADT: 610
Road Type: Rural Paved
Terrain: Not Mountainous
County Road: No designation
Local Road: 1st St NW

Lane Width: 12'
Speed Limit: High
Shoulder Width: 2'
Shoulder Type: Paved
Length (miles): 2.2
Rumble Installed: None
Edge Line Installed: Yes

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

Curve ID	Oil Proj	K	A	Radius (ft)	ADT	Intersection on Curve	Visual Trap	Risk Ranking	Proximity	Existing Arrow Board	Existing Chevrons	Critical Radius	Sign Improvement Project	Shoulder Paving Project	Shoulder Rumble Strip Project	Advance Horizontal Alignment Warning Sign	Advisory Speed Plaque
0506A	Yes	0	0	1132	610	No	No	**	0	-	-	x	-	-	Inside/Outside	-	-
0506B	Yes	0	0	886	610	No	No	**	0	-	-	x	-	-	Inside/Outside	x	45
0506C	Yes	0	0	1115	610	No	No	**	0	-	-	x	-	-	Inside/Outside	-	-
0506D	Yes	0	0	1175	610	Yes	Yes	****	0	-	-	x	-	-	Inside/Outside	-	-

*Curve numbering not consecutive, as some curves may have been removed from further analysis because a large radius, located on a gravel road, etc

Ranking Criteria

Criteria	Criteria
Severe Crashes	> 0
Radius	500 to 1200
ADT	450 to 1000000
Intersection on Curve	Yes
Visual Trap	Yes

Curves are selected for project if:
- 3 or more *s
- x in Proximity or Existing Chevron column
- within Critical Radius

Describe Proposed Safety Improvements

Description	Type	Unit Cost	Quantity	Total cost	Notes
Chevrons	Proactive	\$3,960 per curve	0	\$ -	Notes - Oil county projects recently implemented chevrons on all warranted curves within this corridor.
Arrow Board Only	Proactive	\$1,200 per curve	0	\$ -	
Advance Warning Sign/Speed Advisory Plaque	Proactive	\$1,440 per curve	1	\$ 1,440	
Shoulder Rumble Strip	Proactive	\$5,850 per mile	.6 miles	\$ 3,415	
Shoulder Paving	Proactive	\$54,000 per mile	.0 miles	\$ -	
				\$ 4,855	

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 4,370
Local Match (10% of Total project cost)	\$ 486
Total Project Cost	\$ 4,855

NDDOT Central Office Only

Project Accepted? Yes No Reference Number ID Number

Notes

**McLean County
Summary of Rural Intersection Projects**

Page	Intersection ID	Description	Risk Ranking	Directional Median	Mainline Dynamic Warning Sign	Close Median	Install Street Lights	Signs & Markings	Project Cost (\$)
1	503.01	Old US 83/ND 200 (McLean 503) & US 83	★★★★★	x	-	-	-	x	\$ 1,085,280
2	17.01	8th St SW (McLean 17) & ND 200	★★★★★	-	-	-	-	x	\$ 3,540
3	24.02	Burleigh Rd (McLean 24) & US 83	★★★★	-	-	-	-	x	\$ 5,280
4	22.01	US 83 & McLean 22	★★★★	-	-	-	-	x	\$ 5,280
5	15.02	ND 1804/37 & 2nd St SW (McLean 15)	★★★★	-	x	-	-	x	\$ 65,280
6	2.08	McLean 2 & US 83	★★★★	-	-	-	-	x	\$ 5,280
7	201.03	3rd St SW & US 83	★★★★	x	-	-	-	x	\$ 1,082,640
8	8.01	16th St NW (McLean 8) & US 83	★★★	x	-	-	-	x	\$ 1,085,280
9	201.04	2nd St SW & US 83	★★★	-	-	x	-	x	\$ 32,040
10	201.02	22nd Ave (Painted Woods Golf Course Access) & US 83	★★★	-	-	-	x	x	\$ 12,240
11	15.06	McLean 2 & 39th Ave (McLean 15)	★★★	-	-	-	x	x	\$ 12,840
12	203.01	South Ave/ND 41 & Main St	★★★	-	-	-	-	x	\$ 2,640
13	4.01	23rd St NW (McLean 4) & ND 28	★★★	-	-	-	x	x	\$ 24,720
14	20.04	McLean 20 & US 84 - South int.	★★★	-	-	-	x	x	\$ 25,680
15	27.02	South Ave/ND 41 & Roosevelt St (McLean 27)	★★★	-	-	-	x	x	\$ 12,840
16	503.02	Old US 83/28th Ave NW (McLean 503) & US 83	★★★	-	-	-	x	x	\$ 25,080
23 USC 409 NDDOT Reserves All Objections				3	1	1	6	16	\$ 3,485,940

**McLean County
Rural Intersection Listing**

23 USC 409
NDDOT Reserves All Objections

Int #	Sys	Num	Intersection Description	Skew	On/Near Curve	Development	RR Xing	ADT	Previous STOP (>5mi)	Total Crashes	ADT Cross Product > 80000	Crash Cost
2.06	2	6	Carvell St & 6th Ave (McLean 2)	No	No	No	No	1058	Yes	0	Yes	\$ -
2.07	2	7	Carvell St & 3rd Ave SE	No	Yes	No	Yes	794	No	0	Yes	\$ -
2.08	2	8	McLean 2 & US 83	No	Yes	No	No	6492	Yes	3	Yes	\$ 239,000
8.01	8	1	16th St NW (McLean 8) & US 83	No	No	No	No	6825	Yes	9	Yes	\$ 959,000
8.02	8	2	16th St NW (McLean 8) & McLean 23	No	No	No	No	185	Yes	0	No	\$ -
8.03	8	3	15th St NW (McLean 8) & ND 41	No	No	No	No	493	Yes	0	No	\$ -
12.05	12	5	7th St NW (McLean 12) & ND 41	No	Yes	No	No	585	Yes	0	No	\$ -
12.06	12	6	Railroad Ave W (McLean 12) & ND 41	No	No	No	No	653	No	0	No	\$ -
12.07	12	7	Railroad Ave W (McLean 12) & 16th Ave NW (McLean 27)	No	No	Yes	No	415	No	0	No	\$ -
14.02	14	2	Old US 83 (McLean 503) & Prairieview Ave (McLean 14)	No	Yes	No	No	1215	No	0	Yes	\$ -
15.02	15	2	ND 1804/37 & 2nd St SW (McLean 15)	No	No	Yes	No	3100	Yes	2	Yes	\$ 272,000
15.03	15	3	4th Ave SW & 2nd St SW	No	No	Yes	No	1890	No	0	Yes	\$ -
15.04	15	4	Central Ave NW & Trooper Ave (McLean 15)	Yes	No	No	Yes	2040	No	4	Yes	\$ 48,000
17.01	17	1	8th St SW (McLean 17) & ND 200	No	Yes	Yes	No	2745	Yes	6	Yes	\$ 196,000
17.02	17	2	8th St SW (McLean 17) & 8th St SW	No	No	No	No	225	No	0	No	\$ -
20.04	20	4	McLean 20 & US 84 - South int.	Yes	Yes	No	No	6323	No	0	Yes	\$ -
22.01	22	1	US 83 & McLean 22	Yes	No	No	No	7095	Yes	2	Yes	\$ 503,000
23.05	23	5	ND 53/23 & 23rd Ave NW (McLean 23)	No	No	No	No	310	Yes	0	No	\$ -
24.02	24	2	Burleigh Rd (McLean 24) & US 83	No	Yes	No	No	7645	Yes	4	Yes	\$ 972,000
27.02	27	2	South Ave/ND 41 & Roosevelt St (McLean 27)	No	Yes	No	No	893	Yes	0	Yes	\$ -
33.01	33	1	ND 200/41 & Main St (McLean 33)	No	No	No	No	852	Yes	0	Yes	\$ -
33.04	33	4	ND 53 & McLean 33	No	No	No	No	318	Yes	0	No	\$ -
200.02	200	2	ND 41 & 83 Loop	No	Yes	No	No	505	No	0	No	\$ -
201.02	201	2	22nd Ave (Painted Woods Golf Course Access) & US 83	No	Yes	No	No	6215	No	3	Yes	\$ 436,000
203.01	203	1	South Ave/ND 41 & Main St	No	Yes	No	No	883	No	1	Yes	\$ 12,000
205.01	205	1	24th St SW & ND 41 (Strawberry Lake Access)	No	Yes	No	No	357	No	0	No	\$ -
503.01	503	1	Old US 83/ND 200 (McLean 503) & US 83	Yes	Yes	No	No	5875	Yes	8	Yes	\$ 1,832,000
2.04	2	4	McLean 2 & 57th Ave NW (McLean 9)	No	No	No	No	190	Yes	1	No	\$ 12,000
2.05	2	5	29th St NW (McLean 2) & ND 28	No	No	No	No	322	Yes	1	No	\$ 12,000
12.01	12	1	6th St NW (McLean 12) & US 83	No	No	No	No	4497	No	0	No	\$ -
12.04	12	4	7th St NW (McLean 12) & 17th Ave NW (McLean 27)	Yes	Yes	No	No	253	No	0	No	\$ -
14.01	14	1	3rd St Nw (McLean 14) & 32nd Ave NW (McLean 19)	No	No	No	No	245	Yes	0	No	\$ -
20.03	20	3	4th St SW & US 84 - North int.	No	Yes	No	No	6780	No	0	Yes	\$ -
23.01	23	1	ND 200 & 27th Ave NW (McLean 23)	No	No	No	No	620	Yes	0	No	\$ -
23.04	23	4	ND 53/23 & 23rd Ave NW (McLean 23)	No	Yes	No	No	268	Yes	0	No	\$ -
24.01	24	1	318th Ave NW (McLean 24) & ND 1804	No	Yes	No	No	230	Yes	0	No	\$ -
27.01	27	1	ND 200 & 12th Ave NW (McLean 27)	No	Yes	No	No	813	No	0	No	\$ -
27.03	27	3	McLean 27/McLean 8 & ND 41	No	No	No	No	360	Yes	0	No	\$ -
33.02	33	2	W Wing St (McLean 33) & Main St	No	Yes	No	No	482	Yes	1	No	\$ 12,000
33.03	33	3	McLean 33 & 4th Ave NW (McLean 35)	No	Yes	No	No	260	Yes	1	No	\$ 12,000
201.04	201	4	2nd St SW & US 83	No	No	No	Yes	5542	No	4	Yes	\$ 860,000
202.01	202	1	ND 200/41 & 13th Ave NW	No	No	No	No	794	No	1	No	\$ 824,000
206.01	206	1	ND 53 & 10th Ave NW	No	Yes	No	No	245	Yes	0	No	\$ -
4.01	4	1	23rd St NW (McLean 4) & ND 28	No	No	No	No	605	Yes	1	Yes	\$ 12,000
9.01	9	1	ND 37 & 57th Ave NW (McLean 9)	No	No	No	No	542	Yes	0	No	\$ -
15.01	15	1	ND 1804/37 & 4th Ave SE (McLean 15)	Yes	No	No	No	3457	No	0	Yes	\$ -
19.01	19	1	3rd St NW (McLean 14) & ND 200	No	No	No	No	1320	No	0	Yes	\$ -
20.05	20	5	4th St SW (McLean 20) & ND 200	No	No	No	No	677	No	0	No	\$ -
24.03	24	3	ND 41 & 12th Ave (McLean 24)	No	No	No	No	685	Yes	1	No	\$ 12,000
33.05	33	5	ND 53 & Main St (McLean 33)	No	No	No	No	395	No	0	No	\$ -
200.01	200	1	ND 41 & 14th Ave SW	No	No	No	No	750	Yes	0	Yes	\$ -
201.01	201	1	83 Loop & US 83	No	Yes	No	No	6297	No	0	Yes	\$ -
201.03	201	3	3rd St SW & US 83	Yes	Yes	No	No	6647	No	6	Yes	\$ 196,000
201.05	201	5	1st St SW & US 83	No	No	No	Yes	5672	No	0	Yes	\$ -
503.02	503	2	Old US 83/28th Ave NW (McLean 503) & US 83	Yes	Yes	No	No	4988	No	0	Yes	\$ -
15.06	15	6	McLean 2 & 39th Ave (McLean 15)	No	No	No	Yes	270	Yes	1	No	\$ 91,000
20.01	20	1	4th St SW (McLean 20) & 26th Ave SW	No	No	No	No	135	No	0	No	\$ -
20.02	20	2	4th St SW/Birdie Bailey Blvd & McLean 20	No	No	Yes	Yes	117	No	0	No	\$ -
13.01	13	1	19th St NW (McLean 502) & 45th Ave NW (McLean 13)	No	No	No	No	232	Yes	0	No	\$ -
15.05	15	5	19th St NW (McLean 502) & 39th Ave (McLean 15)	No	No	No	No	457	Yes	1	No	\$ 12,000
23.03	23	3	15th ST NW (McLean 8) & 25th Ave NW (McLean 23)	No	No	No	No	222	Yes	0	No	\$ -
33.06	33	6	3rd Ave & Main St	No	No	No	No	324	No	0	No	\$ -

**McLean County
Rural Intersection Prioritization**

23 USC 409
NDDOT Reserves All Objections

Rank	Int #	Intersection Description	Skew	On/Near Curve	Development	RR Xing	Previous STOP (>5mi)	Total Crashes	ADT Cross Product > 80000	Priority	Crash Cost
1	503.01	Old US 83/ND 200 (McLean 503) & US 83	*	*			*	*	*	*****	\$ 1,832,000
2	17.01	8th St SW (McLean 17) & ND 200		*	*		*	*	*	*****	\$ 196,000
4	24.02	Burleigh Rd (McLean 24) & US 83		*			*	*	*	*****	\$ 972,000
5	22.01	US 83 & McLean 22	*				*	*	*	*****	\$ 503,000
6	15.02	ND 1804/37 & 2nd St SW (McLean 15)			*		*	*	*	*****	\$ 272,000
7	2.08	McLean 2 & US 83		*			*	*	*	*****	\$ 239,000
8	201.03	3rd St SW & US 83	*	*			*	*	*	*****	\$ 196,000
9	15.04	Central Ave NW & Trooper Ave (McLean 15)	*			*		*	*	*****	\$ 48,000
10	8.01	16th St NW (McLean 8) & US 83					*	*	*	***	\$ 959,000
11	201.04	2nd St SW & US 83				*		*	*	***	\$ 860,000
12	201.02	22nd Ave (Painted Woods Golf Course Access) & US 83		*				*	*	***	\$ 436,000
13	15.06	McLean 2 & 39th Ave (McLean 15)				*	*	*	*	***	\$ 91,000
14	203.01	South Ave/ND 41 & Main St		*			*	*	*	***	\$ 12,000
15	33.02	W Wing St (McLean 33) & Main St		*			*	*	*	***	\$ 12,000
16	33.03	McLean 33 & 4th Ave NW (McLean 35)		*			*	*	*	***	\$ 12,000
17	4.01	23rd St NW (McLean 4) & ND 28				*	*	*	*	***	\$ 12,000
18	2.07	Carvell St & 3rd Ave SE		*		*		*	*	***	\$ -
19	20.04	McLean 20 & US 84 - South int.	*	*			*	*	*	***	\$ -
20	27.02	South Ave/ND 41 & Roosevelt St (McLean 27)		*			*	*	*	***	\$ -
21	503.02	Old US 83/28th Ave NW (McLean 503) & US 83	*	*			*	*	*	***	\$ -
22	2.04	McLean 2 & 57th Ave NW (McLean 9)					*	*	*	**	\$ 12,000
23	2.05	29th St NW (McLean 2) & ND 28					*	*	*	**	\$ 12,000
24	24.03	ND 41 & 12th Ave (McLean 24)					*	*	*	**	\$ 12,000
25	15.05	19th St NW (McLean 502) & 39th Ave (McLean 15)					*	*	*	**	\$ 12,000
26	2.06	Carvell St & 6th Ave (McLean 2)				*	*	*	*	**	\$ -
27	12.05	7th St NW (McLean 12) & ND 41		*			*	*	*	**	\$ -
28	14.02	Old US 83 (McLean 503) & Prairieview Ave (McLean 14)		*			*	*	*	**	\$ -
29	15.03	4th Ave SW & 2nd St SW			*		*	*	*	**	\$ -
30	33.01	ND 200/41 & Main St (McLean 33)					*	*	*	**	\$ -
31	12.04	7th St NW (McLean 12) & 17th Ave NW (McLean 27)	*	*			*	*	*	**	\$ -
32	20.03	4th St SW & US 84 - North int.		*			*	*	*	**	\$ -
33	23.04	ND 53/23 & 23rd Ave NW (McLean 23)		*			*	*	*	**	\$ -
34	24.01	318th Ave NW (McLean 24) & ND 1804		*			*	*	*	**	\$ -
35	206.01	ND 53 & 10th Ave NW		*			*	*	*	**	\$ -
36	15.01	ND 1804/37 & 4th Ave SE (McLean 15)	*				*	*	*	**	\$ -
37	200.01	ND 41 & 14th Ave SW					*	*	*	**	\$ -
38	201.01	83 Loop & US 83		*			*	*	*	**	\$ -
39	201.05	1st St SW & US 83				*	*	*	*	**	\$ -
40	20.02	4th St SW/Birdie Bailey Blvd & McLean 20			*	*	*	*	*	**	\$ -
41	202.01	ND 200/41 & 13th Ave NW					*	*	*	**	\$ 824,000
42	8.02	16th St NW (McLean 8) & McLean 23					*	*	*	*	\$ -
43	8.03	15th St NW (McLean 8) & ND 41					*	*	*	*	\$ -
44	12.07	Railroad Ave W (McLean 12) & 16th Ave NW (McLean 27)			*		*	*	*	*	\$ -
45	23.05	ND 53/23 & 23rd Ave NW (McLean 23)					*	*	*	*	\$ -
46	33.04	ND 53 & McLean 33					*	*	*	*	\$ -
47	200.02	ND 41 & 83 Loop		*			*	*	*	*	\$ -
48	205.01	24th St SW & ND 41 (Strawberry Lake Access)		*			*	*	*	*	\$ -
49	14.01	3rd St NW (McLean 14) & 32nd Ave NW (McLean 19)					*	*	*	*	\$ -
50	23.01	ND 200 & 27th Ave NW (McLean 23)					*	*	*	*	\$ -
51	27.01	ND 200 & 12th Ave NW (McLean 27)		*			*	*	*	*	\$ -
52	27.03	McLean 27/McLean 8 & ND 41					*	*	*	*	\$ -
53	9.01	ND 37 & 57th Ave NW (McLean 9)					*	*	*	*	\$ -
54	19.01	3rd St NW (McLean 14) & ND 200					*	*	*	*	\$ -
55	13.01	19th St NW (McLean 502) & 45th Ave NW (McLean 13)					*	*	*	*	\$ -
56	23.03	15th ST NW (McLean 8) & 25th Ave NW (McLean 23)					*	*	*	*	\$ -
57	12.06	Railroad Ave W (McLean 12) & ND 41					*	*	*	*	\$ -
58	17.02	8th St SW (McLean 17) & 8th St SW					*	*	*	*	\$ -
59	12.01	6th St NW (McLean 12) & US 83					*	*	*	*	\$ -
60	20.05	4th St SW (McLean 20) & ND 200					*	*	*	*	\$ -
61	33.05	ND 53 & Main St (McLean 33)					*	*	*	*	\$ -
62	20.01	4th St SW (McLean 20) & 26th Ave SW					*	*	*	*	\$ -
63	33.06	3rd Ave & Main St					*	*	*	*	\$ -

Totals		#	%	Total Stars --	8	24	5	6	33	21	27
				% That Gets Star --	13%	39%	8%	10%	53%	34%	44%
*****	0	0%	Stars								
*****	0	0%	Skew - If intersection is skewed at an angle of 20 degrees or greater.								
*****	2	3%	On/Near Curve - If intersection is on or within 1,000 feet of curve.								
****	6	10%	Development - If intersection aerial shows a commercial development with access near intersection.								
***	12	19%	RR Xing - If intersection has a railroad crossing on any approach within 500 feet.								
**	19	31%	Previous STOP (>5 mi) - If vehicles approaching the stop control have not had a previous stop along the roadway within 5 miles								
*	16	26%	Total Crashes - If intersection has at least 1 crash.								
-	7	11%	ADT Cross Product - If intersection has an ADT cross product > 80000								
		62	100%								

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

Old US 83/ND 200 (McLean 503) & US 83

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Configuration: X Traffic Control Device: Thru-STOP
Configuration (2): Divided Street Lights: Yes
Urban/Rural: Rural Flashers: Overhead
County: McLean Major Entering ADT: 4973
Entering ADT: 5875 Minor Entering ADT: 903
Jurisdiction: State Oil Project: No

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase Survivability
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Angle	K+A
Crashes	8	4	3
Rate (per MVM)	0.7	0.4	0.3



	Value	Critical	Risk Ranking
Skew	Yes	Yes	★
On/Near Curve	Yes	Yes	★
Development	No	Yes	
Near RR Crossing	No	Yes	
Distance from previous STOP	Yes	Yes	★
Volume Cross Product	Yes	≥ 80,000	★
Total Crashes	8	>0	★

★★★★★

Describe Proposed Safety Improvements

Description	Unit Cost	Units	Cost	Notes -
Roundabout	\$4,200,000 per intersection	0	\$ -	
Directional Median	\$1,080,000 per intersection	1	\$ 1,080,000	
Mainline Dynamic Warning Sign	\$60,000 per intersection	0	\$ -	
Close Median	\$30,000 per intersection	0	\$ -	
Installing Street Lights	\$10,200 per street light	Installed	\$ -	
Upgrade Stop Sign	\$540 per sign	2	\$ 1,080	
Upgrade Junction Sign	\$540 per sign	2	\$ 1,080	
Upgrade Stop Ahead Sign	\$600 per sign	2	\$ 1,200	
Upgrade Stop Ahead Marking	\$600 per marking	2	\$ 1,200	
Upgrade Stop Bar	\$360 per marking	2	\$ 720	
Review Signs and CST	\$2,940 per intersection	0	\$ -	
			\$ 1,085,280	

Signs and Markings and Street Light project costs vary by the number of minor legs associated with the intersection.

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 976,752
Local Match (10% of Total project cost)	\$ 108,528
Total Project Cost	\$ 1,085,280

NDDOT Central Office Only

Project Accepted?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Reference Number		ID Number	
Notes					

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

8th St SW (McLean 17) & ND 200

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Configuration: X Traffic Control Device: Thru-STOP
Configuration (2): Undivided Street Lights: Yes
Urban/Rural: Rural Flashers: No
County: McLean Major Entering ADT: 2140
Entering ADT: 2745 Minor Entering ADT: 605
Jurisdiction: State Oil Project: No

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase Survivability
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Angle	K+A
Crashes	6	1	0
Rate (per MVM)	1.2	0.2	0.0



	Value	Critical	Risk Ranking
Skew	No	Yes	
On/Near Curve	Yes	Yes	★
Development	Yes	Yes	★
Near RR Crossing	No	Yes	
Distance from previous STOP	Yes	Yes	★
Volume Cross Product	Yes	≥ 80,000	★
Total Crashes	6	>0	★

★★★★★

Describe Proposed Safety Improvements

Description	Unit Cost	Units	Cost	Notes
Roundabout	\$4,200,000 per intersection	0	\$ -	Notes - WB approach is frontage rd/gas station parking lot - no junction sign, stop ahead sign, & stop ahead marking
Directional Median	\$1,080,000 per intersection	0	\$ -	
Mainline Dynamic Warning Sign	\$60,000 per intersection	0	\$ -	
Close Median	\$30,000 per intersection	0	\$ -	
Installing Street Lights	\$10,200 per street light	Installed	\$ -	
Upgrade Stop Sign	\$540 per sign	2	\$ 1,080	
Upgrade Junction Sign	\$540 per sign	1	\$ 540	
Upgrade Stop Ahead Sign	\$600 per sign	1	\$ 600	
Upgrade Stop Ahead Marking	\$600 per marking	1	\$ 600	
Upgrade Stop Bar	\$360 per marking	2	\$ 720	
Review Signs and CST	\$2,940 per intersection	0	\$ -	
			\$ 3,540	

Signs and Markings and Street Light project costs vary by the number of minor legs associated with the intersection.

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$	3,186
Local Match (10% of Total project cost)	\$	354
Total Project Cost	\$	3,540

NDDOT Central Office Only

Project Accepted?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Reference Number	ID Number
Notes			

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

Burleigh Rd (McLean 24) & US 83

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Configuration: X Traffic Control Device: Thru-STOP
Configuration (2): Divided Street Lights: Yes
Urban/Rural: Rural Flashers: No
County: McLean Major Entering ADT: 7425
Entering ADT: 7645 Minor Entering ADT: 220
Jurisdiction: State Oil Project: No

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase Survivability
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Angle	K+A
Crashes	4	3	2
Rate (per MVM)	0.3	0.2	0.1



	Value	Critical	Risk Ranking
Skew	No	Yes	
On/Near Curve	Yes	Yes	★
Development	No	Yes	
Near RR Crossing	No	Yes	
Distance from previous STOP	Yes	Yes	★
Volume Cross Product	Yes	≥ 80,000	★
Total Crashes	4	>0	★

★★★★

Describe Proposed Safety Improvements

Description	Unit Cost	Units	Cost	Notes -
Roundabout	\$4,200,000 per intersection	0	\$ -	
Directional Median	\$1,080,000 per intersection	0	\$ -	
Mainline Dynamic Warning Sign	\$60,000 per intersection	0	\$ -	
Close Median	\$30,000 per intersection	0	\$ -	
Installing Street Lights	\$10,200 per street light	Installed	\$ -	
Upgrade Stop Sign	\$540 per sign	2	\$ 1,080	
Upgrade Junction Sign	\$540 per sign	2	\$ 1,080	
Upgrade Stop Ahead Sign	\$600 per sign	2	\$ 1,200	
Upgrade Stop Ahead Marking	\$600 per marking	2	\$ 1,200	
Upgrade Stop Bar	\$360 per marking	2	\$ 720	
Review Signs and CST	\$2,940 per intersection	0	\$ -	
			\$ 5,280	

Signs and Markings and Street Light project costs vary by the number of minor legs associated with the intersection.

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$	4,752
Local Match (10% of Total project cost)	\$	528
Total Project Cost	\$	5,280

NDDOT Central Office Only

Project Accepted?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Reference Number	ID Number
Notes			

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

US 83 & McLean 22

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Configuration: X Traffic Control Device: Thru-STOP
Configuration (2): Divided Street Lights: Yes
Urban/Rural: Rural Flashers: No
County: McLean Major Entering ADT: 6690
Entering ADT: 7095 Minor Entering ADT: 405
Jurisdiction: State Oil Project: No

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase Survivability
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Angle	K+A
Crashes	2	2	1
Rate (per MVM)	0.2	0.2	0.1



	Value	Critical	Risk Ranking
Skew	Yes	Yes	★
On/Near Curve	No	Yes	
Development	No	Yes	
Near RR Crossing	No	Yes	
Distance from previous STOP	Yes	Yes	★
Volume Cross Product	Yes	≥ 80,000	★
Total Crashes	2	>0	★

★★★★

Describe Proposed Safety Improvements

Description	Unit Cost		Units	Cost	Notes -
Roundabout	\$4,200,000	per intersection	0	\$ -	
Directional Median	\$1,080,000	per intersection	0	\$ -	
Mainline Dynamic Warning Sign	\$60,000	per intersection	0	\$ -	
Close Median	\$30,000	per intersection	0	\$ -	
Installing Street Lights	\$10,200	per street light	Installed	\$ -	
Upgrade Stop Sign	\$540	per sign	2	\$ 1,080	
Upgrade Junction Sign	\$540	per sign	2	\$ 1,080	
Upgrade Stop Ahead Sign	\$600	per sign	2	\$ 1,200	
Upgrade Stop Ahead Marking	\$600	per marking	2	\$ 1,200	
Upgrade Stop Bar	\$360	per marking	2	\$ 720	
Review Signs and CST	\$2,940	per intersection	0	\$ -	
				\$ 5,280	

Signs and Markings and Street Light project costs vary by the number of minor legs associated with the intersection.

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$	4,752
Local Match (10% of Total project cost)	\$	528
Total Project Cost	\$	5,280

NDDOT Central Office Only

Project Accepted?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Reference Number		ID Number	
Notes					

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

ND 1804/37 & 2nd St SW (McLean 15)

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Configuration: X Traffic Control Device: Thru-STOP
Configuration (2): Undivided Street Lights: Yes
Urban/Rural: Rural Flashers: No
County: McLean Major Entering ADT: 2033
Entering ADT: 3100 Minor Entering ADT: 1068
Jurisdiction: State Oil Project: No

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase Survivability
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Angle	K+A
Crashes	2	1	0
Rate (per MVM)	0.4	0.2	0.0



	Value	Critical	Risk Ranking
Skew	No	Yes	
On/Near Curve	No	Yes	
Development	Yes	Yes	★
Near RR Crossing	No	Yes	
Distance from previous STOP	Yes	Yes	★
Volume Cross Product	Yes	≥ 80,000	★
Total Crashes	2	>0	★

★★★★

Describe Proposed Safety Improvements

Description	Unit Cost		Units	Cost	Notes -
Roundabout	\$4,200,000	per intersection	0	\$ -	
Directional Median	\$1,080,000	per intersection	0	\$ -	
Mainline Dynamic Warning Sign	\$60,000	per intersection	1	\$ 60,000	
Close Median	\$30,000	per intersection	0	\$ -	
Installing Street Lights	\$10,200	per street light	Installed	\$ -	
Upgrade Stop Sign	\$540	per sign	2	\$ 1,080	
Upgrade Junction Sign	\$540	per sign	2	\$ 1,080	
Upgrade Stop Ahead Sign	\$600	per sign	2	\$ 1,200	
Upgrade Stop Ahead Marking	\$600	per marking	2	\$ 1,200	
Upgrade Stop Bar	\$360	per marking	2	\$ 720	
Review Signs and CST	\$2,940	per intersection	0	\$ -	
				\$ 65,280	

Signs and Markings and Street Light project costs vary by the number of minor legs associated with the intersection.

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$	58,752
Local Match (10% of Total project cost)	\$	6,528
Total Project Cost	\$	65,280

NDDOT Central Office Only

Project Accepted?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Reference Number		ID Number	
Notes					

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

McLean 2 & US 83

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Configuration: X Traffic Control Device: Thru-STOP
Configuration (2): Divided Street Lights: Yes
Urban/Rural: Rural Flashers: No
County: McLean Major Entering ADT: 6030
Entering ADT: 6492 Minor Entering ADT: 462
Jurisdiction: State Oil Project: No

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase Survivability
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Angle	K+A
Crashes	3	1	0
Rate (per MVM)	0.3	0.1	0.0



	Value	Critical	Risk Ranking
Skew	No	Yes	
On/Near Curve	Yes	Yes	★
Development	No	Yes	
Near RR Crossing	No	Yes	
Distance from previous STOP	Yes	Yes	★
Volume Cross Product	Yes	≥ 80,000	★
Total Crashes	3	>0	★

★★★★

Describe Proposed Safety Improvements

Description	Unit Cost		Units	Cost	Notes -
Roundabout	\$4,200,000	per intersection	0	\$ -	
Directional Median	\$1,080,000	per intersection	0	\$ -	
Mainline Dynamic Warning Sign	\$60,000	per intersection	0	\$ -	
Close Median	\$30,000	per intersection	0	\$ -	
Installing Street Lights	\$10,200	per street light	Installed	\$ -	
Upgrade Stop Sign	\$540	per sign	2	\$ 1,080	
Upgrade Junction Sign	\$540	per sign	2	\$ 1,080	
Upgrade Stop Ahead Sign	\$600	per sign	2	\$ 1,200	
Upgrade Stop Ahead Marking	\$600	per marking	2	\$ 1,200	
Upgrade Stop Bar	\$360	per marking	2	\$ 720	
Review Signs and CST	\$2,940	per intersection	0	\$ -	
				\$ 5,280	

Signs and Markings and Street Light project costs vary by the number of minor legs associated with the intersection.

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$	4,752
Local Match (10% of Total project cost)	\$	528
Total Project Cost	\$	5,280

NDDOT Central Office Only

Project Accepted?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Reference Number		ID Number	
Notes					

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

3rd St SW & US 83

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Configuration: X Traffic Control Device: Thru-STOP
Configuration (2): Divided Street Lights: Yes
Urban/Rural: Rural Flashers: No
County: McLean Major Entering ADT: 6145
Entering ADT: 6647 Minor Entering ADT: 502
Jurisdiction: State Oil Project: No

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase Survivability
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Angle	K+A
Crashes	6	1	0
Rate (per MVM)	0.5	0.1	0.0



	Value	Critical	Risk Ranking
Skew	Yes	Yes	★
On/Near Curve	Yes	Yes	★
Development	No	Yes	
Near RR Crossing	No	Yes	
Distance from previous STOP	No	Yes	
Volume Cross Product	Yes	≥ 80,000	★
Total Crashes	6	>0	★

★★★★

Describe Proposed Safety Improvements

Description	Unit Cost	Units	Cost	Notes - WB approach is field access - no signage or markings
Roundabout	\$4,200,000 per intersection	0	\$ -	
Directional Median	\$1,080,000 per intersection	1	\$ 1,080,000	
Mainline Dynamic Warning Sign	\$60,000 per intersection	0	\$ -	
Close Median	\$30,000 per intersection	0	\$ -	
Installing Street Lights	\$10,200 per street light	Installed	\$ -	
Upgrade Stop Sign	\$540 per sign	1	\$ 540	
Upgrade Junction Sign	\$540 per sign	1	\$ 540	
Upgrade Stop Ahead Sign	\$600 per sign	1	\$ 600	
Upgrade Stop Ahead Marking	\$600 per marking	1	\$ 600	
Upgrade Stop Bar	\$360 per marking	1	\$ 360	
Review Signs and CST	\$2,940 per intersection	0	\$ -	
			\$ 1,082,640	

Signs and Markings and Street Light project costs vary by the number of minor legs associated with the intersection.

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 974,376
Local Match (10% of Total project cost)	\$ 108,264
Total Project Cost	\$ 1,082,640

NDDOT Central Office Only

Project Accepted?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Reference Number		ID Number	
Notes					

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

16th St NW (McLean 8) & US 83

Agency Name: McLean County

Contact Name: Ron Wagner

Email Address: rfwagner@nd.gov

ND DOT District: 1/4

Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Configuration: X Traffic Control Device: Thru-STOP
 Configuration (2): Divided Street Lights: Yes
 Urban/Rural: Rural Flashers: No
 County: McLean Major Entering ADT: 5558
 Entering ADT: 6825 Minor Entering ADT: 1268
 Jurisdiction: State Oil Project: No

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase Survivability
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Angle	K+A
Crashes	9	4	1
Rate (per MVM)	0.7	0.3	0.1



	Value	Critical	Risk Ranking
Skew	No	Yes	
On/Near Curve	No	Yes	
Development	No	Yes	
Near RR Crossing	No	Yes	
Distance from previous STOP	Yes	Yes	★
Volume Cross Product	Yes	≥ 80,000	★
Total Crashes	9	>0	★

★★★

Describe Proposed Safety Improvements

Description	Unit Cost	Units	Cost	Notes -
Roundabout	\$4,200,000 per intersection	0	\$ -	
Directional Median	\$1,080,000 per intersection	1	\$ 1,080,000	
Mainline Dynamic Warning Sign	\$60,000 per intersection	0	\$ -	
Close Median	\$30,000 per intersection	0	\$ -	
Installing Street Lights	\$10,200 per street light	Installed	\$ -	
Upgrade Stop Sign	\$540 per sign	2	\$ 1,080	
Upgrade Junction Sign	\$540 per sign	2	\$ 1,080	
Upgrade Stop Ahead Sign	\$600 per sign	2	\$ 1,200	
Upgrade Stop Ahead Marking	\$600 per marking	2	\$ 1,200	
Upgrade Stop Bar	\$360 per marking	2	\$ 720	
Review Signs and CST	\$2,940 per intersection	0	\$ -	
			\$ 1,085,280	

Signs and Markings and Street Light project costs vary by the number of minor legs associated with the intersection.

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 976,752
Local Match (10% of Total project cost)	\$ 108,528
Total Project Cost	\$ 1,085,280

NDDOT Central Office Only

Project Accepted?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Reference Number	ID Number
Notes			

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

2nd St SW & US 83

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Configuration: X Traffic Control Device: Thru-STOP
Configuration (2): Divided Street Lights: No
Urban/Rural: Rural Flashers: No
County: McLean Major Entering ADT: 5525
Entering ADT: 5542 Minor Entering ADT: 17
Jurisdiction: State Oil Project: No

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase Survivability
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Angle	K+A
Crashes	4	0	1
Rate (per MVM)	0.4	0.0	0.1



	Value	Critical	Risk Ranking
Skew	No	Yes	
On/Near Curve	No	Yes	
Development	No	Yes	
Near RR Crossing	Yes	Yes	★
Distance from previous STOP	No	Yes	
Volume Cross Product	Yes	≥ 80,000	★
Total Crashes	4	>0	★★★

Describe Proposed Safety Improvements

Description	Unit Cost	Units	Cost	Notes - EB approach is field access - no signage or markings.
Roundabout	\$4,200,000 per intersection	0	\$ -	
Directional Median	\$1,080,000 per intersection	0	\$ -	
Mainline Dynamic Warning Sign	\$60,000 per intersection	0	\$ -	
Close Median	\$30,000 per intersection	1	\$ 30,000	
Installing Street Lights	\$10,200 per street light	0	\$ -	
Upgrade Stop Sign	\$540 per sign	1	\$ 540	
Upgrade Junction Sign	\$540 per sign	1	\$ 540	
Upgrade Stop Ahead Sign	\$600 per sign	1	\$ 600	
Upgrade Stop Ahead Marking	\$600 per marking	0	\$ -	
Upgrade Stop Bar	\$360 per marking	1	\$ 360	
Review Signs and CST	\$2,940 per intersection	0	\$ -	
			\$ 32,040	

Signs and Markings and Street Light project costs vary by the number of minor legs associated with the intersection.

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 28,836
Local Match (10% of Total project cost)	\$ 3,204
Total Project Cost	\$ 32,040

NDDOT Central Office Only

Project Accepted?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Reference Number	ID Number
Notes			

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

22nd Ave (Painted Woods Golf Course Access) & US 83

Agency Name: McLean County

ND DOT District: 1/4

Contact Name: Ron Wagner

Telephone Number: 701-462-8541 Ext 809

Email Address: rfwagner@nd.gov

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Configuration: T Traffic Control Device: Thru-STOP
 Configuration (2): Divided Street Lights: No
 Urban/Rural: Rural Flashers: No
 County: McLean Major Entering ADT: 6200
 Entering ADT: 6215 Minor Entering ADT: 15
 Jurisdiction: State Oil Project: Yes

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase Survivability
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Angle	K+A
Crashes	3	0	1
Rate (per MVM)	0.3	0.0	0.1



	Value	Critical	Risk Ranking
Skew	No	Yes	
On/Near Curve	Yes	Yes	★
Development	No	Yes	
Near RR Crossing	No	Yes	
Distance from previous STOP	No	Yes	
Volume Cross Product	Yes	≥ 80,000	★
Total Crashes	3	>0	★

★★★

Describe Proposed Safety Improvements

Description	Unit Cost	Units	Cost	Notes - Stop ahead sign proposed as Oil County Project
Roundabout	\$4,200,000 per intersection	0	\$ -	
Directional Median	\$1,080,000 per intersection	0	\$ -	
Mainline Dynamic Warning Sign	\$60,000 per intersection	0	\$ -	
Close Median	\$30,000 per intersection	0	\$ -	
Installing Street Lights	\$10,200 per street light	1	\$ 10,200	
Upgrade Stop Sign	\$540 per sign	1	\$ 540	
Upgrade Junction Sign	\$540 per sign	1	\$ 540	
Upgrade Stop Ahead Sign	\$600 per sign	0	\$ -	
Upgrade Stop Ahead Marking	\$600 per marking	1	\$ 600	
Upgrade Stop Bar	\$360 per marking	1	\$ 360	
Review Signs and CST	\$2,940 per intersection	0	\$ -	
			\$ 12,240	

Signs and Markings and Street Light project costs vary by the number of minor legs associated with the intersection.

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 11,016
Local Match (10% of Total project cost)	\$ 1,224
Total Project Cost	\$ 12,240

NDDOT Central Office Only

Project Accepted?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Reference Number		ID Number	
Notes					

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

McLean 2 & 39th Ave (McLean 15)

Agency Name: **McLean County**

Contact Name: **Ron Wagner**

Email Address: **rfwagner@nd.gov**

ND DOT District: **1/4**

Telephone Number: **701-462-8541 Ext 809**

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Configuration: T Traffic Control Device: Thru-STOP
 Configuration (2): Undivided Street Lights: No
 Urban/Rural: Rural Flashers: No
 County: McLean Major Entering ADT: 175
 Entering ADT: 270 Minor Entering ADT: 95
 Jurisdiction: Local Oil Project: No

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase Survivability
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Angle	K+A
Crashes	1	0	0
Rate (per MVM)	2.0	0.0	0.0



	Value	Critical	Risk Ranking
Skew	No	Yes	
On/Near Curve	No	Yes	
Development	No	Yes	
Near RR Crossing	Yes	Yes	★
Distance from previous STOP	Yes	Yes	★
Volume Cross Product	No	≥ 80,000	
Total Crashes	1	>0	★

★★★

Describe Proposed Safety Improvements

Description	Unit Cost	Units	Cost	Notes - .
Roundabout	\$4,200,000 per intersection	0	\$ -	
Directional Median	\$1,080,000 per intersection	0	\$ -	
Mainline Dynamic Warning Sign	\$60,000 per intersection	0	\$ -	
Close Median	\$30,000 per intersection	0	\$ -	
Installing Street Lights	\$10,200 per street light	1	\$ 10,200	
Upgrade Stop Sign	\$540 per sign	1	\$ 540	
Upgrade Junction Sign	\$540 per sign	1	\$ 540	
Upgrade Stop Ahead Sign	\$600 per sign	1	\$ 600	
Upgrade Stop Ahead Marking	\$600 per marking	1	\$ 600	
Upgrade Stop Bar	\$360 per marking	1	\$ 360	
Review Signs and CST	\$2,940 per intersection	0	\$ -	
			\$ 12,840	

Signs and Markings and Street Light project costs vary by the number of minor legs associated with the intersection.

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 11,556
Local Match (10% of Total project cost)	\$ 1,284
Total Project Cost	\$ 12,840

NDDOT Central Office Only

Project Accepted?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Reference Number	ID Number
Notes			

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

South Ave/ND 41 & Main St

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Configuration: T Traffic Control Device: Thru-STOP
Configuration (2): Undivided Street Lights: Yes
Urban/Rural: Rural Flashers: No
County: McLean Major Entering ADT: 530
Entering ADT: 883 Minor Entering ADT: 353
Jurisdiction: State Oil Project: No

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase Survivability
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Angle	K+A
Crashes	1	0	0
Rate (per MVM)	0.6	0.0	0.0

	Value	Critical	Risk Ranking
Skew	No	Yes	
On/Near Curve	Yes	Yes	★
Development	No	Yes	
Near RR Crossing	No	Yes	
Distance from previous STOP	No	Yes	
Volume Cross Product	Yes	≥ 80,000	★
Total Crashes	1	>0	★

★★★



Describe Proposed Safety Improvements

Description	Unit Cost		Units	Cost	Notes -
Roundabout	\$4,200,000	per intersection	0	\$ -	
Directional Median	\$1,080,000	per intersection	0	\$ -	
Mainline Dynamic Warning Sign	\$60,000	per intersection	0	\$ -	
Close Median	\$30,000	per intersection	0	\$ -	
Installing Street Lights	\$10,200	per street light	Installed	\$ -	
Upgrade Stop Sign	\$540	per sign	1	\$ 540	
Upgrade Junction Sign	\$540	per sign	1	\$ 540	
Upgrade Stop Ahead Sign	\$600	per sign	1	\$ 600	
Upgrade Stop Ahead Marking	\$600	per marking	1	\$ 600	
Upgrade Stop Bar	\$360	per marking	1	\$ 360	
Review Signs and CST	\$2,940	per intersection	0	\$ -	
				\$ 2,640	

Signs and Markings and Street Light project costs vary by the number of minor legs associated with the intersection.

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$	2,376
Local Match (10% of Total project cost)	\$	264
Total Project Cost	\$	2,640

NDDOT Central Office Only

Project Accepted?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Reference Number		ID Number	
Notes					

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

23rd St NW (McLean 4) & ND 28

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Configuration: X Traffic Control Device: Thru-STOP
Configuration (2): Undivided Street Lights: No
Urban/Rural: Rural Flashers: No
County: McLean Major Entering ADT: 378
Entering ADT: 605 Minor Entering ADT: 227
Jurisdiction: State Oil Project: No

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase Survivability
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Angle	K+A
Crashes	1	0	0
Rate (per MVM)	0.9	0.0	0.0



	Value	Critical	Risk Ranking
Skew	No	Yes	
On/Near Curve	No	Yes	
Development	No	Yes	
Near RR Crossing	No	Yes	
Distance from previous STOP	Yes	Yes	★
Volume Cross Product	Yes	≥ 80,000	★
Total Crashes	1	>0	★

★★★

Describe Proposed Safety Improvements

Description	Unit Cost		Units	Cost	Notes -
Roundabout	\$4,200,000	per intersection	0	\$ -	
Directional Median	\$1,080,000	per intersection	0	\$ -	
Mainline Dynamic Warning Sign	\$60,000	per intersection	0	\$ -	
Close Median	\$30,000	per intersection	0	\$ -	
Installing Street Lights	\$10,200	per street light	2	\$ 20,400	
Upgrade Stop Sign	\$540	per sign	2	\$ 1,080	
Upgrade Junction Sign	\$540	per sign	2	\$ 1,080	
Upgrade Stop Ahead Sign	\$600	per sign	2	\$ 1,200	
Upgrade Stop Ahead Marking	\$600	per marking	1	\$ 600	
Upgrade Stop Bar	\$360	per marking	1	\$ 360	
Review Signs and CST	\$2,940	per intersection	0	\$ -	
				\$ 24,720	

Signs and Markings and Street Light project costs vary by the number of minor legs associated with the intersection.

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$	22,248
Local Match (10% of Total project cost)	\$	2,472
Total Project Cost	\$	24,720

NDDOT Central Office Only

Project Accepted?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Reference Number		ID Number	
Notes					

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

McLean 20 & US 84 - South int.

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Configuration: X Traffic Control Device: Thru-STOP
Configuration (2): Divided Street Lights: No
Urban/Rural: Rural Flashers: No
County: McLean Major Entering ADT: 6208
Entering ADT: 6323 Minor Entering ADT: 115
Jurisdiction: State Oil Project: Yes

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase Survivability
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Angle	K+A
Crashes	0	0	0
Rate (per MVM)	0.0	0.0	0.0



	Value	Critical	Risk Ranking
Skew	Yes	Yes	★
On/Near Curve	Yes	Yes	★
Development	No	Yes	
Near RR Crossing	No	Yes	
Distance from previous STOP	No	Yes	
Volume Cross Product	Yes	≥ 80,000	★
Total Crashes	0	>0	

★★★

Describe Proposed Safety Improvements

Description	Unit Cost	Units	Cost	Notes -
Roundabout	\$4,200,000 per intersection	0	\$ -	
Directional Median	\$1,080,000 per intersection	0	\$ -	
Mainline Dynamic Warning Sign	\$60,000 per intersection	0	\$ -	
Close Median	\$30,000 per intersection	0	\$ -	
Installing Street Lights	\$10,200 per street light	2	\$ 20,400	
Upgrade Stop Sign	\$540 per sign	2	\$ 1,080	
Upgrade Junction Sign	\$540 per sign	2	\$ 1,080	
Upgrade Stop Ahead Sign	\$600 per sign	2	\$ 1,200	
Upgrade Stop Ahead Marking	\$600 per marking	2	\$ 1,200	
Upgrade Stop Bar	\$360 per marking	2	\$ 720	
Review Signs and CST	\$2,940 per intersection	0	\$ -	
			\$ 25,680	

Signs and Markings and Street Light project costs vary by the number of minor legs associated with the intersection.

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 23,112
Local Match (10% of Total project cost)	\$ 2,568
Total Project Cost	\$ 25,680

NDDOT Central Office Only

Project Accepted?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Reference Number		ID Number	
Notes					

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

South Ave/ND 41 & Roosevelt St (McLean 27)

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rfwagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Configuration: T Traffic Control Device: Thru-STOP
Configuration (2): Undivided Street Lights: No
Urban/Rural: Rural Flashers: No
County: McLean Major Entering ADT: 743
Entering ADT: 893 Minor Entering ADT: 150
Jurisdiction: State Oil Project: No

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase Survivability
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Angle	K+A
Crashes	0	0	0
Rate (per MVM)	0.0	0.0	0.0



	Value	Critical	Risk Ranking
Skew	No	Yes	
On/Near Curve	Yes	Yes	★
Development	No	Yes	
Near RR Crossing	No	Yes	
Distance from previous STOP	Yes	Yes	★
Volume Cross Product	Yes	≥ 80,000	★
Total Crashes	0	>0	

★★★

Describe Proposed Safety Improvements

Description	Unit Cost	Units	Cost	Notes -
Roundabout	\$4,200,000 per intersection	0	\$ -	
Directional Median	\$1,080,000 per intersection	0	\$ -	
Mainline Dynamic Warning Sign	\$60,000 per intersection	0	\$ -	
Close Median	\$30,000 per intersection	0	\$ -	
Installing Street Lights	\$10,200 per street light	1	\$ 10,200	
Upgrade Stop Sign	\$540 per sign	1	\$ 540	
Upgrade Junction Sign	\$540 per sign	1	\$ 540	
Upgrade Stop Ahead Sign	\$600 per sign	1	\$ 600	
Upgrade Stop Ahead Marking	\$600 per marking	1	\$ 600	
Upgrade Stop Bar	\$360 per marking	1	\$ 360	
Review Signs and CST	\$2,940 per intersection	0	\$ -	
			\$ 12,840	

Signs and Markings and Street Light project costs vary by the number of minor legs associated with the intersection.

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 11,556
Local Match (10% of Total project cost)	\$ 1,284
Total Project Cost	\$ 12,840

NDDOT Central Office Only

Project Accepted?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Reference Number	ID Number
Notes			

HIGHWAY SAFETY IMPROVEMENT PROGRAM (HSIP) PROJECT APPLICATION

North Dakota Department of Transportation Programming
SFN 59959 (06-2011)

Old US 83/28th Ave NW (McLean 503) & US 83

Agency Name: McLean County
Contact Name: Ron Wagner
Email Address: rf Wagner@nd.gov

ND DOT District: 1/4
Telephone Number: 701-462-8541 Ext 809

Please attach a location map(s). You may use additional sheets to further describe your project.

Location Description

Configuration: X Traffic Control Device: Thru-STOP
Configuration (2): Divided Street Lights: No
Urban/Rural: Rural Flashers: No
County: McLean Major Entering ADT: 4808
Entering ADT: 4988 Minor Entering ADT: 180
Jurisdiction: State Oil Project: Yes

- SHSP Emphasis Area (check all that apply)
- Reduce Alcohol Impaired Driving
 - Increase the Use of Safety Restraints for all Occupants
 - Younger Driver/Older Driver Safety
 - Curb Aggressive Driving
 - Improvements to Address Lane Departure Crashes
 - Enhancing Emergency Medical Capabilities to Increase Survivability
 - Improve Intersection Safety

Describe Current Safety Issues & Systemic Ranking Review

North Dakota Crashes, 2009 - 2013

5 years

	Total	Angle	K+A
Crashes	0	0	0
Rate (per MVM)	0.0	0.0	0.0



	Value	Critical	Risk Ranking
Skew	Yes	Yes	★
On/Near Curve	Yes	Yes	★
Development	No	Yes	
Near RR Crossing	No	Yes	
Distance from previous STOP	No	Yes	
Volume Cross Product	Yes	≥ 80,000	★
Total Crashes	0	>0	

★★★

Describe Proposed Safety Improvements

Description	Unit Cost	Units	Cost	Notes -
Roundabout	\$4,200,000 per intersection	0	\$ -	
Directional Median	\$1,080,000 per intersection	0	\$ -	
Mainline Dynamic Warning Sign	\$60,000 per intersection	0	\$ -	
Close Median	\$30,000 per intersection	0	\$ -	
Installing Street Lights	\$10,200 per street light	2	\$ 20,400	
Upgrade Stop Sign	\$540 per sign	2	\$ 1,080	
Upgrade Junction Sign	\$540 per sign	2	\$ 1,080	
Upgrade Stop Ahead Sign	\$600 per sign	2	\$ 1,200	
Upgrade Stop Ahead Marking	\$600 per marking	1	\$ 600	
Upgrade Stop Bar	\$360 per marking	2	\$ 720	
Review Signs and CST	\$2,940 per intersection	0	\$ -	
			\$ 25,080	

Signs and Markings and Street Light project costs vary by the number of minor legs associated with the intersection.

Project Cost Estimate (attach detailed copy)

Proposed Year of Construction

Federal Funds	\$ 22,572
Local Match (10% of Total project cost)	\$ 2,508
Total Project Cost	\$ 25,080

NDDOT Central Office Only

Project Accepted?	<input type="checkbox"/> Yes <input type="checkbox"/> No	Reference Number	ID Number
Notes			

23 USC 409
NDDOT Reserves All Objections

APPENDIX
Mercer County

[Appendix Intentionally Left Blank]

23 USC 409
NDDOT Reserves All Objections

APPENDIX
Mountrail County

[Appendix Intentionally Left Blank]

23 USC 409
NDDOT Reserves All Objections

APPENDIX
Renville County

[Appendix Intentionally Left Blank]

23 USC 409
NDDOT Reserves All Objections

[Appendix Intentionally Left Blank]

23 USC 409
NDDOT Reserves All Objections

[Appendix Intentionally Left Blank]

23 USC 409
NDDOT Reserves All Objections

[Appendix Intentionally Left Blank]

23 USC 409
NDDOT Reserves All Objections

APPENDIX
Williams County

[Appendix Intentionally Left Blank]

23 USC 409
NDDOT Reserves All Objections

[Appendix Intentionally Left Blank]

23 USC 409
NDDOT Reserves All Objections

APPENDIX
**Theodore Roosevelt
National Park**

[Appendix Intentionally Left Blank]

5.0 Behavioral Safety Strategies

5.1 Purpose of Driver Behavior Safety Strategies

North Dakota's LRSP recognizes that driver behavior is a significant factor contributing to a majority of the severe crashes on North Dakota's local roads. Traffic crashes may result from any combination of overlapping crash factors: the roadway, the vehicle, and driver behavior. Research supports and experts agree that in most cases driver behavior – risky decisions, driver error, lapses of attention, and driver limitations – is a chief factor contributing to traffic crashes (Lerner et al., 2010). Severe traffic crashes in North Dakota's western region can be largely prevented and reduced if motorists, with an emphasis on younger drivers, were persuaded to engage in key safe driving practices to buckle up, drive at safe speeds, pay attention, and plan ahead to avoid impaired driving. For maximum safety benefit, these measures should be undertaken in addition to adopting infrastructure safety strategies to help ensure the safest and most forgiving roadway possible.

5.2 Overview of Behavioral Crash Data for Western Region

Unbelted Vehicle Occupants: Traffic safety research demonstrates that a motorist's seat belt is the most effective defense in the event of a crash. When lap and shoulder seat belts are properly used, the risk of fatal injury to front-seat passenger car occupants is reduced by 45 percent and the risk of moderate-to-critical injury is reduced by 50 percent (NHTSA, 2001). Safety benefits are even greater for light-truck occupants, with seat belt usage reducing fatalities by 60 percent and moderate-to-critical injury by 65 percent (NHTSA, 2009). North Dakota's 2013 statewide seat belt use by drivers and right-front seat passengers is 77.7 percent; lower than the 2012 nationwide use of 86 percent. Reducing unbelted severe crashes is the western region's greatest opportunity to improve road safety by improving driver behavior. The trend of severe unbelted crashes is increasing statewide. With 46 percent of the region's severe crashes involving unbelted motorists, the western region is slightly below the 48-percent statewide-unbelted severe crashes. However, of the severe crashes on the local road system, 55 percent of severe crashes involved an unbelted vehicle occupant.

Alcohol-Related Crashes: Although the number of impaired driving fatalities has decreased nationally since 2007, the percentage of alcohol-impaired fatalities in the U.S. has remained essentially unchanged (NHTSA, 2012a). Similarly, over the last decade, each year nearly half of motor vehicle fatalities statewide in North Dakota are to be alcohol-related. In the western region, severe alcohol-related crashes are the same percentage as the statewide severe alcohol-related crashes at 29 percent. According to statewide crash data, nearly half of these preventable severe crashes are on the local road system.

Young Driver-Involved: Young drivers have the highest rate in fatal crashes of any age group. Nationally, the fatal crash rate of drivers age 16 to 20 is nearly twice that of drivers age 21 and older (NHTSA, 2012b). Key underlying factors to their high crash risk are the developmental and behavioral issues of adolescence coupled with driving inexperience. Too often, young drivers immaturely take risks while driving, without thinking through the potential

consequences of their life-threatening decisions (Keating, 2007). Such high-risk behaviors typically include lack of seat belt use, speeding/aggressive driving, and distractions while driving. Although severe injury crashes involving young drivers have gradually declined statewide, young drivers under the age of 21 continue to be overrepresented in crashes with 67 percent statewide occurring on local roads. In the western region, 17 percent of severe crashes involve young drivers, which is lower than the 21 percent of statewide severe crashes.

Excessive Speed or Aggressive Driving: Speeding is common and a tough nut to crack nationally and in North Dakota. Although drivers generally acknowledge that speeding is an unsafe behavior, speeding remains common because the perceived risk of injury is low relative to the perceived benefits of driving fast such as saving time and driving pleasure (Lerner et al., 2010). Consequently, the percentage of speeding-related fatal crashes has remained essentially unchanged over the years and remains a contributing factor in 31 percent of traffic fatalities in the U.S. (NHTSA, 2012c). Speeding and aggressive driving continue to account for approximately 25 percent of all severe crashes in North Dakota with 62 percent of these crashes statewide occurring on the local road system. In the western region, the percentage of severe speeding/aggressive driving crashes is the same as the statewide percentage of 26 percent.

5.3 Importance of Traffic Safety Culture Change

5.3.1 Influence of Traffic Safety Culture

In adopting North Dakota's long-term vision of zero fatalities, the 2013 North Dakota SHSP established a collective goal to reduce the 3-year average of traffic fatalities to 100 or fewer by 2020. To accomplish this interim goal, the western region, together with its traffic safety partners, seeks to develop and implement its LRSP safety strategies within the broader societal context of motorists' behavior and North Dakota's traffic safety culture. Traffic safety culture can be defined as the implicit shared values, beliefs, and perceptions that shape motorists' behavior.

5.3.2 Social Norms Inhibiting a Strong Traffic Safety Culture

At the core of the nation's and North Dakota's traffic safety challenge is a complacency toward risk taking by drivers and a tolerance for traffic crashes and the resulting deaths and serious injuries. Contributing factors include a sense of individual driver invulnerability, perceived driving skills and vehicle control, and a sense of anonymity and entitlement on the road. The latest data from the *2012 Traffic Safety Culture Index Survey* reports that, as in previous years, the safety culture in the United States surrounding distracted driving can best be described as "do as I say, not as I do" – due to the high numbers of people who object to certain behaviors, yet will admit that they, themselves, engage in them (AAA, 2012). Real progress in traffic safety depends largely on addressing and changing this culture of indifference to effectively implement and see results of both SHSP and LRSP safety strategies.

5.3.3 Social Levels Influencing Safety Culture

Efforts to change individual driver and motorist behaviors should be planned and executed from an ecological viewpoint – one that examines the driving public and their interaction with their social environments. Traffic safety culture and its influence operate at different levels within society. Therefore, a broader definition of traffic safety culture includes the values, beliefs, and perceptions of not only the individual driver, but of those shared by the various

communities of which the driver is a part (Figure 5-1). The individual driver exists within a system that includes the following levels, each embodying factors that influence driving culture and crash risk (Ward et al., 2010; Dahlberg and Krug, 2002):

- Individual level – Factors such as driver age, driving experience, self-esteem, income, and substance abuse
- Relationship level – Factors such as relationships with peers, coworkers, supervisors, and family members
- Community level – Factors include the settings or environments in which relationships occur such as school, church, workplaces, and neighborhoods
- Societal level – Large-scale factors such as safety, health, economic, and educational policies, as well as government commitments and priorities

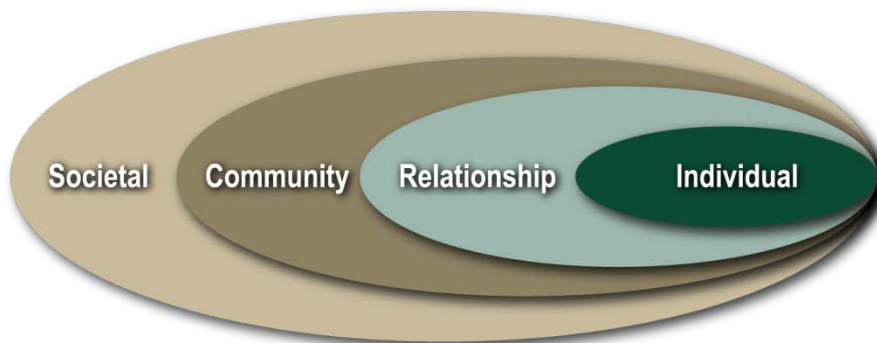


FIGURE 5-1
Social Ecological Perspective of Culture
Source: "Violence – A Global Public Health Problem" by L.L. Dahlberg and E.G. Krug, in *World Report on Violence and Health* (World Health Organization)

Social norms at each level and within each group point to those behaviors that are perceived as important. Norms create conformity to expectations that allows people (that is, drivers) to successfully socialize to the subcultures in which they belong. These norms create a climate in which unsafe driving behavior is either encouraged or discouraged. Perceived social norms condoning high-risk driving behaviors provide the case for drivers to rationalize their own high-risk behaviors. To accomplish the culture change, traffic safety behavioral strategies seek to make safe-driving behaviors the accepted norm across all social ecological levels.

The implication of the social-ecological model for LRSP efforts is that the implementation plans of LRSP strategies plans should attempt to:

- Increase perceived social pressure to comply with traffic safety laws and practices, thereby producing safety behavioral norms (Ward et al., 2010).
- Shift the social acceptance of high-risk behaviors to one of perceived unacceptance by significant others and one's peers.

5.4 Behavioral Safety Strategies

5.4.1 Role of Policy, Education, and Enforcement

Techniques or strategies to change driver behavior essentially fall into one of three categories: 1) *policy change* or laws, local ordinances, regulations, sanctions and penalties; 2) *enforcement* of the laws; and 3) *education* or public information, media, and training. These three categories of behavioral safety strategies work together to have the greatest impact on changing risky driver behavior. The degree of effectiveness of any one strategy on behavioral change depends not only on how effectively the strategy is implemented, but also on how these three categories of policy, enforcement, and education are working together.

For example, a state or local agency that is seeking to increase motorists' seat belt use and decides to use a "buckle up" public information campaign (behavioral change strategy). The effectiveness of the campaign not only depends on the quality of the education or public information campaign (relevance to target group, duration, saturation of the messaging), but also the strength of the law in place (primary vs. secondary seat belt law, all passengers vs. front seat only, higher penalty/fee vs. low penalty/fee) and, most important, the degree of seat belt use enforcement (coverage, intensity, visibility by the public).

Consequently, the strength of driver safety policy, enforcement, and education surrounding a behavioral strategy selected greatly impact its effectiveness. Therefore, when selecting and implementing a behavioral strategy, an agency must examine the policy, enforcement, and educational context of the strategy and explore ways to strengthen each, as appropriate, to gain the most from a selected strategy.

Finally, it is critically important that traffic safety enforcement is viewed as a priority within local law enforcement agencies and that agency leaders and administrators advocate for strong local enforcement of traffic laws. It is imperative that agency leaders actively address political and public resistance and provide a pathway to deploy the leading strategy to save lives on North Dakota roadways—effective traffic enforcement coupled with public outreach. By advocating for enforcement, educating local elected officials, and equipping officers to effectively enforce traffic safety laws, North Dakota will reap far greater life-saving outcomes from its local safety initiatives.

5.4.2 Effective Use of Public Information Strategies

Public information (education) strategies are often popular among communities seeking to change risky driving behaviors. Education or public information campaigns can range from brochures and mailings to peer-to-peer safety messaging. Brochures and mailings are a passive approach, while peer-to-peer messaging provides a more effective behavioral change approach. In general, a key challenge in influencing driver behavior is that most drivers know what they are supposed to do to drive safely, yet due to successfully driving with risky patterns with no incidence of crash, drivers underestimate the risk of their choices. For this reason, research supports that education, coupled with enforcement, will have the strongest impact in changing driver behavior (NHTSA, 2013).

The following are key characteristics of impactful public information/education campaigns (Williams, 2007):

- Implemented in support of a high-visibility enforcement program

- Focused messaging for a target group
- Longer-term programs delivering messages of sufficient intensity over time
- Messages communicating new information not previously well known
- Messages that are part of a broader-based, longer-term community program with similar messaging coming from multiple sources
- Using behavior change models including interactive methods teaching skills to resist social pressure (such as role playing, group discussion)

5.4.3 LRSP Phase 3 Western Region Priority Strategies

During the LRSP workshop, participants reviewed western region’s behavioral crash data and discussed behavioral safety strategy alternatives that could be implemented at the local level. Based on the strategy review discussions, participants engaged in a prioritization process to identify the preferred local behavioral safety strategies for the four behavioral critical emphasis areas. In addition, participants identified the priority behavioral strategy to promote heavy truck safety in the western region. Table 5-1 reflects the LRSP Phase 3 results of the strategy prioritization, as well as each strategy’s alignment with the North Dakota SHSP (indicated by an “X” if included in the SHSP).

TABLE 5-1
North Dakota Phase 3 LRSP Workshop Priority Behavioral Strategies and Relationship with the North Dakota SHSP

Phase 3 LRSP Western Region Workshop Priority Driver Behavior Strategies and Their Relationship with the North Dakota SHSP	2013 North Dakota SHSP
Impaired Driving	
<ul style="list-style-type: none"> • Support community programs for alternative transportation 	X
<ul style="list-style-type: none"> • Expand high-visibility DUI enforcement saturations including sobriety checkpoints 	X
Speeding and Aggressive Driving	
<ul style="list-style-type: none"> • Identify high-risk speed locations/corridors for enhanced enforcement 	X
<ul style="list-style-type: none"> • Conduct high-visibility targeted enforcement of speeding and aggressive driving <i>Note: Added the following speeding/aggressive driving enforcement strategy to support priority infrastructure safety strategy.</i> • Provide enhanced enforcement to support local agency implementation of red-light confirmation lights at at-risk intersection locations. 	X
Young Drivers	
<ul style="list-style-type: none"> • Encourage driver education providers (local schools and private providers) to require parent education component 	X
Unbelted Occupants	
<ul style="list-style-type: none"> • Enforce secondary seat belt use law 	X
Heavy Truck – Behavioral	
<ul style="list-style-type: none"> • Promote heavy-truck driver training and education 	

The following subsections provide a more complete description of each priority strategy, suggested steps to launch local agency efforts, recommended implementation resources, and potential future considerations for expanded local agency and community-based support for the SHSP safety strategies. It is important to note that multidisciplinary SHSP implementation teams will be formed to support the implementation of priority strategies for each of the six SHSP priority emphasis areas including: lane departure, unbelted vehicle occupants, alcohol-related, speeding/aggressive driving, young drivers, and intersections. Therefore, local agencies seeking to leverage local-level safety initiatives described in the following subsections are encouraged to coordinate with and/or engage in the statewide SHSP implementation teams.

5.4.4 Impaired Driving

Western Region Priority Strategy – Support community programs for alternative transportation

Description: A growing strategy in local communities to combat alcohol-impaired driving is to provide alternative community transportation services for those who have been drinking and who might otherwise choose to drink and drive. Alternative transportation programs may employ a variety of transportation alternatives including taxis, privately owned vehicles, buses, tow trucks, and law enforcement agents. To increase the accessibility of services, local communities often seek cooperative programming and cost-sharing approaches involving a spectrum of partners such as local drinking establishments and restaurants, alcohol beverage industry, local transportation providers, nonprofit community organizations and volunteers, agency participation, and the users themselves. Programs reflect a variety of options, from those that provide alternative transportation services within a limited time frame--a particular community festival or holiday--to professional year-round services to pick up drivers who have been drinking and their vehicles at a bar and transport both home (Sprattler, 2010). The most effective characteristics of safe ride programs most widely used by drinkers choosing not to drive include programs that are continually available, low or no cost to users, convenient, and easy to use (NHTSA, 2009).

Getting Started:

- Contact the Traffic Safety Office (TSO) to participate in the SHSP process as a stakeholder in the implementation of strategies identified for priority safety emphasis areas, such as impaired driving, in the SHSP.
- The following steps offer guidance to start a safe ride initiative in the local communities of the eastern region (adapted from Sprattler, 2010):
 1. Access community needs by identifying local impaired driving issues and potential barriers to the use of alternative transportation
 2. Identify community supporters and potential partners
 3. Call a meeting of all interested parties
 4. Determine the service area
 5. Choose or create transportation providers
 6. Develop “level of service” program model
 7. Establish hours and days of operation

8. Price services and secure cooperative funding
9. Determine program structure and management
10. Market the program to the hospitality industry, its patrons, and the public

Implementation Resources:

- See Section 5.5, Traffic Safety Office Supporting Resources.
- For assistance with identifying local community partners contact the NDDOT Traffic Safety Office (TSO) at (701) 328-4692
- For information on the SAFE CAB Program in Isanti County, Minnesota visit <http://www.centurycouncil.org/drunk-driving/safe-cab-program>.
- For information on how Minnesota has set up regional/county-based safe ride programs visit: <http://www.minnesotazd.org/topics/impaired/saferide/documents/report.pdf>.
- For guidance on local community development or expansion of alternative transportation programs for impaired drivers and for a list of selected alternative transportation programs meeting core program evaluation criteria, see *Alternative Transportation Programs: A Countermeasure for Reducing Impaired Driving* at: <http://mcs.nhtsa.gov/index.cfm/product/449/alternative-transportation-programs-a-countermeasure-for-reducing-impaired-driving-booklet.cfm>
- For information on establishing community designated drivers programs, visit: <http://www.nhtsa.gov/people/injury/alcohol/DesignatedDriver/comm1.html>
- To contact local public health unit addressing alcohol use/impaired driving issues, see state listing located at: <http://www.ndhealth.gov/localhd/lphu-directory.pdf>
- For North Dakota road safety information including impaired driver facts sheets, issue briefs, and other education and outreach resources, visit the North Dakota State University (NDSU) Rural Transportation Safety and Security Center (RTSSC) at: <http://www.ugpti.org/rtssc/resources/>

The NDSU Upper Great Plains Transportation Institute at:

<http://www.ugpti.org/resources/>

Western Region Priority Strategy – Expand the use of high-visibility DUI enforcement saturation patrols including sobriety checkpoints

Description: High-visibility DUI enforcement is a high-priority, proven safety strategy to reduce severe alcohol-impaired crashes in North Dakota and across the nation. The most effective way to deter impaired driving is through a highly visible enforcement effort to reinforce the driving public's belief that impaired drivers are at high risk of being arrested, prosecuted, and adjudicated. High-visibility enforcement consists of multiple jurisdictions and/or multiple squads patrolling a segment of roadway at the same time, often using brightly colored vests and signs. Planned enforcement is publicized extensively through community kickoff events involving the local media and public education campaigns about the enforcement. High visibility also includes enforcement agencies reporting to news media the

outcome or arrests made during the saturation or checkpoint campaign. In addition to deterring driving after drinking by increasing the perceived risk of arrest, high-visibility enforcement extends the safety impact of the enforcement campaign for a longer period following the campaign.

What are saturation patrols?

Saturation patrols, also known as “dedicated DUI patrols,” are stepped-up enforcement involving a greater number of law enforcement officers patrolling a specific area for a set time to identify and arrest impaired drivers. Multiple agencies often combine and concentrate their resources to conduct saturation patrols.

What are sobriety checkpoints?

At sobriety checkpoints, law enforcement officials evaluate drivers for signs of alcohol or drug impairment at certain points on the roadway. Vehicles are stopped in a specific sequence, such as every other vehicle or every fourth, fifth, etc. The frequency of which vehicles are stopped depends on the traffic conditions and the number of enforcement personnel available to staff the checkpoint.

Getting Started:

- Contact the Traffic Safety Office (TSO) to participate in the SHSP process as a stakeholder in the implementation of strategies identified for priority safety emphasis areas, such as impaired driving, in the SHSP.
- Assist local law enforcement agencies and Regional DUI Task Forces with identifying locations where a high number of impaired driving crashes have occurred in order to provide high-visibility enforcement.
- With local law enforcement, attend county board/city council meetings to speak on the importance of reducing impaired driving and the important role of both enforcement and engineering safety strategies.
- Collaborate with highway patrol, local law enforcement, community health officials, and local traffic safety stakeholders to use TSO DUI campaign materials to conduct community outreach on the enforcement campaigns.

Implementation Resources:

- For crash data to focus DUI enforcement efforts, contact the NDDOT Traffic Safety Office (TSO) at (701) 328-4692.
- To learn about local traffic safety enforcement activities and enforcement grant opportunities, contact the TSO and the TSO Law Enforcement Liaison.
- See Section 5.5, Traffic Safety Office Supporting Resources.
- For statewide impaired-driving enforcement mobilizations, the TSO distributes media outreach materials to local enforcement agencies, which may include press releases, talking points, camera-ready artwork and posters, impaired driving fact sheets, handouts for the public at checkpoints, a print public service announcement (PSA), and live-read radio PSAs. (*Note: TSO to assemble available information resources.*)

- For guidance on planning and publicizing saturation patrols and sobriety checkpoints:
 - *Saturation Patrols & Sobriety Checkpoints: A How-to Guide for Planning and Publicizing Impaired Driving Enforcement Efforts*, NHTSA, Report No. DOT HS 809 063, revised October 2002.
http://www.nhtsa.gov/people/injury/alcohol/saturation_patrols/
 - *Low-Staffing Sobriety Checkpoints*. NHTSA, Report No. DOT HS 810 590, 2006.
http://www.nhtsa.gov/people/injury/enforce/LowStaffing_Checkpoints/
- For information on the effective adjudication of DUI arrests and to inquire about DUI data sources, contact ND Traffic Safety Resource Prosecutors:
 - Aaron Birst at aaron.birst@ndaco.org, 701-328-7342
 - Kristi Pettit Venhuizen at 701/780-9276
- For community outreach using the Deutscher display depicting the remains of the Deutscher family vehicle that was struck and all members killed by a drunk driver, contact Kristi Engelstad, Display Coordinator, F-M Ambulance Service at kristi.engelstad@fmambulance.com, 701-364-1759.
- For North Dakota road safety information including impaired driver facts sheets, issue briefs, and other education and outreach resources, visit the NDSU Rural Transportation Safety and Security Center (RTSSC) at:
<http://www.ugpti.org/rtssc/resources/>

The NDSU Upper Great Plains Transportation Institute at:
<http://www.ugpti.org/resources/>
- Other impaired-driving safety resources:
 - National Highway Traffic Safety Administration (NHTSA):
<http://www.nhtsa.gov/Impaired>
 - Governor’s Highway Safety Administration (GHSA):
<http://www.ghsa.org/html/issues/impaireddriving/index.html>
 - Insurance Institute for Highway Safety:
http://www.iihs.org/research/topics/alcohol_drugs.html

For additional impaired-driving safety strategies, see the following additional high-priority North Dakota Local Road Safety Program strategies:

- Employ alcohol screening and brief interventions by health care providers following an impaired driving crash. (Further explanation can be found in the North Dakota Local Road Safety Program, Phase 2, Cass County Report located at:
<http://www.dot.nd.gov/divisions/safety/trafficsafety.htm>)
- Promote sobriety initiatives for DUI offenders: 24/7, ignition interlock, and DUI courts. (Further explanation can be found in the North Dakota Local Road Safety Program, Phase 2, Cass County and Eastern Region Reports located at:
<http://www.dot.nd.gov/divisions/safety/trafficsafety.htm>)

- Educate and enforce zero tolerance laws for drivers under age 21. (Further explanation can be found in the North Dakota Local Road Safety Program, Phase 2, Eastern Region Report located at:
<http://www.dot.nd.gov/divisions/safety/trafficsafety.htm>)
- Conduct court monitoring of prosecution and sentencing of DUI offenders. (Further explanation can be found in the North Dakota Local Road Safety Program, Phase 2, Grand Forks Region Report located at:
<http://www.dot.nd.gov/divisions/safety/trafficsafety.htm>)

Potential future considerations for expanded local agency and community-based support of SHSP impaired-driving safety strategies:

- Engage local safety stakeholders (law enforcement, Mothers Against Drunk Driving [MADD], Students Against Drunk Driving [SADD], North Dakota Safety Council, community health provider, and emergency medical service providers) and facilitate coalition development to educate local elected officials on the importance of state agency impaired-driving legislative initiatives resulting from the state's comprehensive assessment of North Dakota impaired-driving laws.

5.4.5 Speeding/Aggressive Driving

Western Region Priority Strategy – Identify high-risk speed locations/corridors for enhanced speed enforcement

Description: Identifying locations that have a high number of speeding-related crashes are at the heart of an effective speed enforcement program. Enforcement and the associated public outreach efforts are most successful when deployed at specific locations or corridors and times when speeding is most likely to occur. Strengthened analysis of the following sources of data and information provides the focus needed for more effective, targeted enforcement and public outreach to reduce speeding-related severe crashes:

- Current and historical crash records and citation data
- Engineering traffic and speed data
- Law enforcement experience
- Public input

Getting Started:

- Contact the Traffic Safety Office (TSO) to participate in the SHSP process as a stakeholder in the implementation of strategies identified for priority safety emphasis areas, such as speeding/aggressive driving, in the SHSP.
- Assist local law enforcement agencies with analyzing crash and traffic data to identify locations where a high number of speeding/aggressive driving-related crashes have occurred in order to provide high-visibility enforcement.

Data from other states suggests that rural road segments or corridors that have a higher density of lane-departure crashes and urban street segments that have a higher density of red-light-running crashes have also been found to have a higher density of speeding/aggressive driving and other behavior-related crashes. Therefore, for suggested locations for

enhanced enforcement, see agency-specific priority locations for rural road segments at risk for lane-departure crashes and urban road segments at risk for red-light-running crashes in this report's Chapter 4 Appendix. (Note: HSIP flex funds may be used for overtime enforcement of at-risk locations for severe lane-departure and red-light-running crashes.)

Note on at-risk lane departure infrastructure safety strategies: To reduce severe lane-departure crashes on rural paved roads, the western region will be deploying infrastructure safety improvements (for example, centerline rumble strips, edge line rumble strips, adding or widening edge lines, high-visibility pavement markings) along select at-risk corridors. To maximize the expected safety benefit of the road improvements, integrating increased enforcement presence at targeted at-risk locations and timeframes will reduce risky driver behaviors by strengthening the public's perceived risk of being stopped.

Implementation Resources:

- For crash data and analysis to focus speed enforcement efforts, which may include the development of electronic pin maps of speeding-related crash locations, contact the NDDOT Traffic Safety Office (TSO) at (701) 328-4692.
- Work with NDDOT staff regarding specific design features of the system. Contact NDDOT Traffic Operations Section, Shawn Kuntz, (701) 328-2673.
- For speeding-related crash data by county, see *2013 North Dakota Crash Summary* at: <http://www.dot.nd.gov/divisions/safety/docs/crash-summary.pdf>
- The 2013 annual high crash location process is complete. Maps and crash listings for the 2011-2013 Urban High Crash Locations, 2009-2013 Rural Intersection High Crash Locations, and the 2011-2013 State Highway Segment Crash Map are currently available through the NDDOT Programming Division. Contact Shawn Kuntz at (701) 328-2673 or skuntz@nd.gov for a copy.
- See Section 5.5, Traffic Safety Office Supporting Resources.
- For a successful model of data-driven traffic enforcement, see Washington State's *Target Zero Team* project where planners use GIS mapping software to guide Target Zero patrols to where crashes were occurring and which roads led to high-collision areas at: <http://www.wsp.wa.gov/targetzero/targetzero.htm#tzt>
- For guidance on data-driven speed enforcement, see:
NHTSA's Speed Enforcement Program Guidelines at: http://safety.fhwa.dot.gov/speedmgt/ref_mats/fhwasa09028/resources/Speed%20Enforcement%20Program%20Guidelines.pdf#page=1
National Cooperative Highway Research Program (NCHRP) Report 500, Volume 23: *Guidance for Implementation of the AASHTO Strategic Highway Safety Plan: A Guide for Reducing Speeding-Related Crashes* at: http://onlinepubs.trb.org/onlinepubs/nchrp/nchrp_rpt_500v23.pdf
- Other speeding-related safety resources:
Governor's Highway Safety Administration:
<http://www.ghsa.org/html/issues/speeding.html>

Insurance Institute for Highway Safety:

<http://www.iihs.org/iihs/topics/t/speed/topicoverview>

- For North Dakota road safety information including speeding facts sheets, issue briefs, and other education and outreach resources, visit the North Dakota State University (NDSU) Rural Transportation Safety and Security Center (RTSSC) at:
<http://www.ugpti.org/rtssc/resources/>

The NDSU Upper Great Plains Transportation Institute at:

<http://www.ugpti.org/resources/>

Western Region Priority Strategy – Conduct high-visibility targeted enforcement of speeding and aggressive driving

Description: See Section 5.4.4 priority strategy, *Expand the use of high-visibility DUI enforcement saturation patrols including sobriety checkpoints*, for a full description of high-visibility/highly publicized enforcement campaigns.

North Dakota law enforcement agencies (state, county, city, and tribal) participate in the state's cooperative enforcement programs to reduce speeding-related fatalities and incapacitating injuries by stepped up enforcement of aggressive drivers of cars and trucks primarily in oil-production-impacted counties. For aggressive driving enforcement, officers focus on drivers who commit a combination of moving traffic violations such as speeding, following too closely, and/or running red lights that endanger other persons or property.

Getting Started:

- Contact the Traffic Safety Office (TSO) to participate in the SHSP process as a stakeholder in the implementation of strategies identified for priority safety emphasis areas, such as speeding, in the SHSP.
- Assist local law enforcement agencies with identifying locations where a high number of speeding/aggressive driving-related crashes have occurred in order to provide high-visibility enforcement.
- With local law enforcement, attend county board/city council meetings to speak on the importance of enforcing the speed limit and reducing aggressive driving.
- Collaborate with highway patrol, local law enforcement, community health officials, and local traffic safety stakeholders to use TSO speeding campaign materials to conduct community outreach on the enforcement campaign.

Implementation Resources:

- For crash data and analysis to focus speed enforcement efforts, contact the NDDOT Traffic Safety Office (TSO) at (701) 328-4692.
- To learn about local traffic safety enforcement initiatives and enforcement grant opportunities, contact the TSO and the state's Law Enforcement Liaison at (701) 328-4692. Enforcement grant application information for overtime speed enforcement can be found at:
<https://www.dot.nd.gov/divisions/safety/trafficsafety.htm>
- See Section 5.5, Traffic Safety Office Supporting Resources.

- For guidance for law enforcement on planning and publicizing local speed saturation patrols and successful case examples, see NHTSA's *Guidelines for Developing a Municipal Speed Enforcement Program* at:
<http://www.nhtsa.dot.gov/people/injury/enforce/program.htm>
- For a summary of successful aggressive driving enforcement programs deployed at the local and state-level across the country, see NHTSA's *Aggressive Driving Enforcement: Strategies for Implementing Best Practices* at:
<http://www.nhtsa.gov/people/injury/enforce/aggressdrivers/aggenforce/>
- Other speeding-related safety resources:
Governor's Highway Safety Administration:
<http://www.ghsa.org/html/issues/speeding.html>
Insurance Institute for Highway Safety:
<http://www.iihs.org/iihs/topics/t/speed/topicoverview>
- For North Dakota road safety information including facts sheets, issue briefs, and other education and outreach resources, visit the North Dakota State University (NDSU) Rural Transportation Safety and Security Center (RTSSC) at:
<http://www.ugpti.org/rtssc/resources/>
The NDSU Upper Great Plains Transportation Institute at:
<http://www.ugpti.org/resources/>

Potential future considerations for expanded local agency, tribal, and community-based support of SHSP safety strategies:

- Engage local safety stakeholders (law enforcement, Mothers Against Drunk Driving [MADD], Students Against Drunk Driving [SADD], North Dakota Safety Council, community health provider, emergency medical service providers) and facilitate coalition development to educate local elected officials on the importance of state agency legislative initiatives to strengthen penalties such as increased fines for right-of-way and speeding violations.

Western Region Priority Strategy – Provide enhanced enforcement to support local agency implementation of red-light confirmation lights at at-risk intersection locations

(Note: Use HSIP flex funds for overtime enforcement.)

Description: To reduce the most common type of severe crashes at signalized intersections – right-angle crashes – the western region seeks to deploy an innovative safety strategy using a downstream confirmation light system to reduce red-light running. A blue LED light mounted on the back of a traffic light is activated when a driver runs the red light. A single officer stationed across the intersection downstream from the traffic light can safely observe and pursue the red-light violator (instead of one officer to observe and an additional officer to pursue). To implement, red-light confirmation lights require interdependent collaboration of both engineering and enforcement; even more effective would be added public outreach about the red-light confirmation lights.

Getting Started:

- Contact the Traffic Safety Office (TSO) to participate in the SHSP process as a stakeholder in the implementation of strategies identified for priority safety emphasis areas, such as speeding and aggressive driving, in the SHSP.
- Work with NDDOT staff regarding specific design features of the system. Contact NDDOT Traffic Operations Section, Shawn Kuntz, (701) 328-2673.
- Coordinate with local law enforcement:
 - Ask for their assistance in locating the red-light confirmation lights on traffic signal poles/mast arms (that is, optimum viewing locations)
 - Ask for an agreement regarding minimum levels of enforcement (that is, 1 hour per day at any of the equipped locations)
 - Provide training to officers after installation – demonstrate that the “blue/confirmation” light does illuminate at the same instant as the red light of the traffic signal
- Encourage law enforcement to coordinate with the city/county attorney – make sure the attorney understands the technology and is willing to prosecute the violators.
- Encourage the city/county attorney to coordinate with the district court judge – make sure the judge understands the technology and will uphold charges and support the conviction of violators.
- Prior to issuing any tickets for violations using the red-light confirmation lights, have the traffic signal operations engineer check all of the signals clearance intervals (yellow + all red) to make sure they are 100-percent consistent with the agencies adopted guidelines. Have a note confirming compliance signed by the engineer put in the signal controller cabinet. (This will help address the inevitable complaint by those issued tickets that the agency changed the clearance intervals to generate more violators and increase revenue streams.)
- With local law enforcement, attend county board/city council meetings to speak on the community safety benefits of red-light confirmation lights.

Implementation Resources:

- For crash data and analysis to focus red-light enforcement efforts, contact the NDDOT Traffic Safety Office (TSO) at (701) 328-4692.
- See Section 5.5, Traffic Safety Office Supporting Resources.
- Safety project developed as part of the LRSP are eligible for funding through the state’s Highway Safety Improvement Program (HSIP) including enhanced enforcement.
- Contact local agencies that have deployed red-light confirmation lights:
 - City of Burnsville Public Works, Minnesota
Engineering Department
100 Civic Center Parkway
Burnsville, MN 55337
Phone: (952) 895-4534

- Richardson Police Department, Texas
140 North Greenville Ave.
Richardson, TX 75081
Phone: (972) 744-4800

5.4.6 Young Drivers

Western Region Priority Strategy – Encourage driver education providers (local schools and private providers) to require a parent education component

Description: Effective parental monitoring of teen driving can go a long way in helping to keep novice drivers safe on the roadway. Programs offering teen driver safety materials together with facilitated guidance help parents make the important connection between teen driving restrictions and teen driving risks. Without a required parent component for teen driver education, parents lack awareness of graduated driver's license (GDL) safety provisions, don't fully recognize teen driving risks, are often anxious to be relieved from shuttling their teens, may be reluctant to invest the necessary time to instruct and supervise their teen's driving, and often believe their teen is the exception and is a good and safe driver. Incorporating a parent education component into driver education programs is demonstrating promising results in overcoming these parent challenges and more effectively engaging parents.

Key components of a good parent education program include:

- Discusses risks for novice teen drivers
- Explains how and why GDL works to address the driving risks for young drivers
- Reviews the critical role parents play in teaching, supporting, and managing their novice drivers
- Explains the importance of and provides an opportunity to try out a parent/teen driving agreement
- Delivery by trained, educated facilitators
- Emphasizes parents and teens working together for safety

Getting Started:

- Contact the Traffic Safety Office (TSO) to participate in the SHSP process as a stakeholder in the implementation of strategies identified for priority safety emphasis areas, such as young drivers, in the SHSP.
- Learn about education providers in your local community by contacting the Traffic Safety Office at (701) 328-4692.
- Explore county-mandated parent training by examining the state of Virginia's Planning District 8 (includes four counties and four cities) 90-minute driving safety program for parents and teens as part of the in-classroom portion of the state's driver education curriculum. Contact Ben Swecker, (703) 791-7328 or Tim TeWalt, (703) 791-7353 at Prince William County Schools.
- With local law enforcement and driver educators, attend county board/city council meetings to inform them of the local initiative to incorporate parent education into driver education programs to more fully engage parents and reduce severe young driver crashes.

- Post information on teen driving laws on local school websites or request school resource officer to send information to parents highlighting driving risks for teens and existing North Dakota teen driver laws.
- Consider linking parent-teen participation in a teen-driving program to school parking privileges.

Implementation Resources:

- See Section 5.5, Traffic Safety Office Supporting Resources.
- For educational materials for parents of teen drivers including guidelines to ensure teen drivers are educated on safe driving practices as well as *The North Dakota Parent Guide to Teen Driving* and the *Parent Teen Driver Agreement*, see the Teen Drivers & Parents section of the NDDOT website:
<http://www.dot.nd.gov/divisions/safety/teens-parents.htm>
- For a free mobile app for parents and teens to automatically track and log their supervised driving and includes tracking night driving, type of roads traveled and weather conditions, see: <http://www.roadreadyapp.com/>
- For an example parent-teen class outline and discussion guide, download the Minnesota Department of Public Safety, Office of Traffic Safety's *Teen Drivers: The Parent's Role* at: <https://dps.mn.gov/divisions/ots/teen-driving/Documents/Parent-class-leaders-guide-july-2013.doc>
- The Minnesota Office of Traffic Safety developed, *Point of Impact: Teen Driver Safety Parent Awareness Program*, as a community-based class for parents and their soon-to-be teen drivers. The Point of Impact Leader's Guide is a resource for implementing the class. The Point of Impact video is an important component of the program. A PowerPoint presentation and other information are available by contacting Gordy Pehrson at gordy.pehrson@state.mn.us.
- For information on the nationally recognized University of Michigan's *Checkpoints* program offering facilitated parent education:
<http://youngdriverparenting.org/> and <http://www.saferdrivingforteens.org/>
- For a comprehensive guide to strengthen parental roles in teen safe driving, see the Governors Highway Safety Association's (GHSA's) *Promoting Parent Involvement in Teen Driving: An In-Depth Look at the Importance and the Initiatives*.
<http://www.ghsa.org/html/publications/pdf/sfteens13.pdf>
- For additional information on mandated and voluntary parent/teen education programs in Connecticut, Massachusetts, Georgia, and select Virginia counties, see GHSA's *Curbing Teen Driver Crashes: An In-Depth Look at State Initiatives*.
<http://www.ghsa.org/html/publications/pdf/sfteens12.pdf>
- For age-specific information and resources for parents on how to start and continue the conversation about alcohol use with their children, see the North Dakota's *Parents LEAD* program (Listen, Educate, Ask, Discuss).
<http://www.parentslead.org/>

- For PowerPoint presentations, parent/teen activities and other tools to be adopted for driver education providers, see *Teendriversource: Research Put into Action*.
www.teendriversource.org
- For information on *Teen Driving Parents/Alive at 25* that includes a 1-hour parent, 4-hour teen driving program including a comprehensive publication, *Teen Driver; A Family Guide to Teen Safe Driving*.
http://www.nsc.org/products_training/Products/MotorVehicleSafety/Pages/TeenDriving.aspx
- For information in Utah's award winning "Don't Drive Stupid" Parent Night Program.
<http://publicsafety.utah.gov/highwaysafety/documents/smart.pdf>
<http://www.ghsa.org/html/meetings/awards/2013/13utah.html>
- For information on *Parents are the Key* and free downloadable resources that can be customized.
www.cdc.gov/ParentsAreTheKey/
- For North Dakota road safety information including facts sheets, issue briefs, and other education and outreach resources, visit the North Dakota State University (NDSU) Rural Transportation Safety and Security Center (RTSSC) at:
<http://www.ugpti.org/rtssc/resources/>

The NDSU Upper Great Plains Transportation Institute at:

<http://www.ugpti.org/resources/>

Other high-impact strategies for local agency consideration:

- Publicize and conduct high-visibility enforcement of teen driver GDL restrictions, teen cell-phone-use and texting-while-driving laws, underage drinking and driving, and seat belt use laws. (Further explanation can be found in the North Dakota Local Road Safety Program, Phase 2, Cass County Report located at:
<http://www.dot.nd.gov/divisions/safety/trafficsafety.htm>)
- Conduct locally facilitated peer-to-peer driver safety outreach campaigns designed for high school students to raise peer awareness of the common risk factors threatening novice drivers.

Consideration for future expanded local agency/community support of the North Dakota SHSP young driver safety strategies:

- Engage local traffic safety stakeholders (law enforcement, school administrators, driving schools, insurance companies, community health providers, and emergency medical service providers) and facilitate coalition development to educate local elected officials on the importance of state agency GDL and teen driver safety policy initiatives.

5.4.7 Unbelted Occupants

Western Region Priority Strategy – Enforce secondary seat belt law

Description: Research has demonstrated that the most important difference between the high and low seat-belt-use states is enforcement of the states' belt use law, and this is true for both secondary and primary law states (NHTSA, 2008). Although a few geographic, demographic, and cultural factors are associated with lower seat belt use, none of these factors is a barrier to high seat belt use. However, law enforcement officers find it more difficult to enforce secondary belt laws and are sometimes reluctant to issue tickets because "secondary" status implies that these laws are of lower priority to their superiors, policy makers, judges, and the general public (NHTSA, 2008).

With the emphasis on enforcing the state's secondary seat belt law as the most effective strategy to increase seat belt use and reduce severe unbelted crashes, North Dakota law enforcement agencies (state, county, city, and tribal) participate in the state's *Click It or Ticket* mobilization program through stepped-up enforcement of unrestrained vehicle occupants. The mobilization is supported by national and local paid advertising and earned media campaigns aimed at raising awareness before the enforcement saturation. North Dakota now conducts four annual *Click It or Ticket* campaigns – including participation in the national *Click It or Ticket* campaign in May. North Dakota has increased its focus on nighttime seat belt use because fewer motorists buckle up at night resulting in a greater number of severe nighttime crashes.

See Section 5.4.4, *Expand the use of high-visibility DUI enforcement saturation patrols including sobriety checkpoints*, for a full description of high-visibility, highly publicized enforcement campaigns.

Getting Started:

- Contact the Traffic Safety Office (TSO) to participate in the SHSP process as a stakeholder in the implementation of strategies identified for priority safety emphasis areas, such as unbelted crashes, in the SHSP.
- Assist local law enforcement agencies with identifying locations where a high number of unbelted crashes have occurred in order to provide high-visibility enforcement.
- With local law enforcement, attend county board/city council meetings to speak on the importance and safety benefits of local enforcement of seat belt use.
- Collaborate with highway patrol, local law enforcement, community health officials, and local traffic safety stakeholders to use TSO seat belt use campaign materials to conduct community outreach on the enforcement campaign.

Implementation Resources:

- For crash data and analysis to focus seat belt enforcement efforts, contact the NDDOT Traffic Safety Office (TSO) at (701) 328-4692.
- To learn about local traffic safety enforcement initiatives, secondary enforcement strategies, and enforcement grant opportunities, contact the TSO and the state's Law Enforcement Liaison at (701) 328-4692. Enforcement grant application information for overtime belt enforcement can be found at:

<https://www.dot.nd.gov/divisions/safety/trafficsafety.htm>

- See Section 5.5, Traffic Safety Office Supporting Resources.
- For statewide belt use mobilizations, the TSO distributes media outreach materials to local enforcement agencies which may include: press releases, talking points, camera-ready artwork and posters, belt-use fact sheets, a print public service announcement (PSA), and live-read radio PSAs. (*Note: TSO to assemble available information resources.*)
- For information on strategies and recommendations for effective enforcement of secondary belt use:

How States Achieve High Seat Belt Use Rates

<http://www-nrd.nhtsa.dot.gov/Pubs/810962.pdf>

Innovative Seat Belt Demonstration Programs in Kentucky, Mississippi, North Dakota, and Wyoming, NHTSA, Report No. DOT HS 811 080, March 2009.

<http://www.nhtsa.gov/Driving+Safety/Occupant+Protection>

Avoiding "Tween" Tragedies: Demonstration Project to Increase Seat Belt Use Among 8- to 15-year-old Motor Vehicle Occupants, NHTSA, Report No. DOT HS 811 096, June 2012.

<http://www.nhtsa.gov/Driving+Safety/Occupant+Protection>

- For guidance on planning and publicizing belt-use saturation patrols:
NHTSA 2014 national seat belt enforcement *Products for Enforcement Action Kit (PEAK)* to help enforcement rally officers and alert the public to prepare for maximum high-visibility seat belt enforcement during the day and also at night.
<http://www.trafficsafetymarketing.gov/CIOT-PEAK>
Nighttime Enforcement of Seat Belt Laws: An Evaluation of Three Community Programs, NHTSA, Report No. DOT HS 811 189, August 2009.

For the above and other belt enforcement and information outreach resources:

<http://www.nhtsa.gov/Driving+Safety/Occupant+Protection>

- For North Dakota road safety information including facts sheets, issue briefs, and other education and outreach resources, visit the North Dakota State University (NDSU) Rural Transportation Safety and Security Center (RTSSC) at:
<http://www.ugpti.org/rtssc/resources/>

The NDSU Upper Great Plains Transportation Institute at:

<http://www.ugpti.org/resources/>

- Other seat-belt safety resources:
Center for Disease Control and Prevention seat belt briefing:
<http://www.cdc.gov/motorvehiclesafety/seatbeltbrief/>
Governor's Highway Safety Administration:
<http://www.ghsa.org/html/issues/occprotection/index.html>
Insurance Institute for Highway Safety:
<http://www.iihs.org/iihs/topics/t/safety-belts/topicoverview>

Potential future considerations for expanded local agency, tribal, and community-based support of SHSP safety strategies:

- Pursue tribal ordinances for primary enforcement of seat belt laws.
- Pursue local support for primary seat belt law. (Further explanation can be found in the North Dakota Local Road Safety Program, Phase 2, Cass County, Eastern Region, and Grand Forks County Region Reports located at:
<http://www.dot.nd.gov/divisions/safety/trafficsafety.htm>)
- Conduct community-wide and sustained public information outreach to educate and create cultural awareness of the risks associated with unbelted motorists.

5.4.8 Heavy Truck – Behavioral Strategy

Western Region Priority Strategy – Promote heavy-truck driver training and education

Description: The United States is currently facing a heavy-truck driver shortage that is estimated to grow to over 230,000 drivers by 2022, and North Dakota’s western region is experiencing an even faster-growing demand for drivers to support the region’s booming oil industry (Commercial Vehicle Training Association, 2014). Consequently, with the high demand for heavy-truck drivers, trucking companies often turn to hiring available drivers who are inexperienced young males – the riskiest driving population – to meet the driver shortage. In the western region’s oil-production counties, severe heavy truck crashes have increased from 6 crashes in 2008 to 92 crashes in 2013 – a staggering increase of over 1,500 percent. Crash data for western region’s oil-production counties reflects an over-representation of younger drivers (age 18 to 25) involved in severe single-vehicle, heavy truck crashes, supporting the likelihood of young and inexperienced drivers contributing to the region’s severe heavy truck crashes. It is for this reason that western region safety workshop participants identified the importance of promoting heavy-truck driver training and education to help ensure as a key road safety strategy.

Getting Started:

- Locate community partners to collaborate with to promote awareness of the importance and availability of heavy-truck driver training and education programs. Potential partners include the North Dakota Motor Carriers Association, Federal Motor Carrier Safety Administration, and other training providers. For assistance in identifying partners, contact the Traffic Safety Office at (701) 328-4692.
- Promote and disseminate information to commercial employers, independent operators/drivers, farmers, and farming cooperatives about available driver training courses.
- In cooperation with North Dakota Motor Carrier Division of the Highway Patrol and local law enforcement, attend county board/city council meetings to speak on the importance and safety benefits of a well-trained and qualified heavy-truck workforce.

Implementation Resources:

- To request a Highway Patrol Motor Carrier Division safety awareness presentation, submit your request by clicking on the following link and entering presentation request:
<http://www.nd.gov/ndhp/contact-form?region=dschweit@nd.gov>

- The Federal Motor Carrier Safety Administration (FMCSA) requires States to issue a Commercial Driver's License (CDL) only after the driver passes knowledge and skills tests administered by the State and related to the type of vehicle the driver expects to operate. For registration, licensing, and safety information, see: <http://www.fmcsa.dot.gov/resources-for-drivers>
- For information on heavy-truck driver and industry professionals' continued training and education offered through the North Dakota Motor Carriers Association, available to both member and non-members, see: <https://www.ndmca.org/Events.aspx>
- For a one-stop resource for safety compliance materials on FMCSA's Compliance/Safety/Accountability or CSA program including posters, factsheets, brochures, and PowerPoint presentations, see: <http://csa.fmcsa.dot.gov/YourRole/Drivers.aspx>
- Driver training occurs largely through CDL training schools for new heavy truck drivers and the successful skills and knowledge-based testing to be a CDL license holder. For CDL driver training and advanced driver training programs in the western region and in North Dakota, see:
<http://www.nitalaska.com/north-dakota/truck-driver-training/>
<http://www.nitalaska.com/north-dakota/safety-training/thinking-driver/>
<http://www.willistonstate.edu/News-and-Events/Events/TrainND/CDL-Class-Minot.html>
<http://www.toptruckingschools.com/states/north-dakota/>
For customized employer heavy truck driver training programs, see:
<http://www.nitalaska.com/north-dakota/curriculum-development/>
- For information on how to haul the most legal weight without violating truck-weight laws and to learn tips on how to configure trucks with proper axle spacing and tire size, see North Dakota Local Technical Assistance Program (NDLTAP) *Truck-Weight Education and Outreach Program*:
<http://www.ndltap.org/events/view.php?id=343>
- For North Dakota road safety information including facts sheets, issue briefs, and other education and outreach resources, visit the North Dakota State University (NDSU) Rural Transportation Safety and Security Center (RTSSC) at:
<http://www.ugpti.org/rtssc/resources/>
The NDSU Upper Great Plains Transportation Institute at:
<http://www.ugpti.org/resources/>

5.5 Traffic Safety Office Supporting Resources

Unless otherwise indicated, for technical assistance and supporting resources contact the NDDOT Traffic Safety Office (TSO) at (701) 328-4692.

5.5.1 TSO Grant Program Application Process

The TSO solicits grant applications from eligible state and local agencies and for-profit and nonprofit organizations that address North Dakota's problem solution plans (PSPs). These PSPs reflect the state's greatest opportunities for behavioral safety improvement. Grant applications are due June 30 of each year and are evaluated based on: (1) response to identified safety issues, (2) proposed evidenced-based strategy, (3) clear objectives, (4) comprehensive evaluation plans, and (5) cost-effective budgets. Selected projects are included in TSO's Highway Safety Plan and, once approved by NHTSA, grant contracts are generally effective October 1 through September 30.

5.5.2 Technical Assistance

County Outreach Program

The TSO, in cooperation with the North Dakota Association of Counties, offers a county-based Traffic Safety Outreach program to provide advocacy and community mobilization, media support, public outreach, and training to address seat belt use, impaired driving, speeding, and distracted driving at the county level. County participants include county employees, county officials, law enforcement, transportation engineering, public health, schools, businesses, nonprofit agencies, media, and other entities.

5.5.3 Traffic Records/Crash Data

Traffic and Criminal Software

The quality of traffic safety issue identification and decision-making regarding effective safety strategies and their implementation is based on the quality and timeliness of crash data. Data are collected from officer crash reports at the time of the incident when a crash involves fatalities, injuries, or at least \$1,000 in property damage. The NDDOT reviews the crash report and enters the data into their centralized database, the Crash Reporting System (CRS).

To assist law enforcement in providing timely, complete, and accurate crash reports, the NDDOT Traffic Safety Office supports the installation of Traffic and Criminal Software (TraCS) and provides technical assistance and training to local agency and tribal law enforcement to effectively deploy TraCS for in-the-field incident reporting. Local and tribal enforcement agencies are strongly encouraged to use TraCS to electronically submit crash reports to the NDDOT. Key benefits to participating agencies and tribes are the reduced officer time and effort required for duplicate entry into local and state crash databases, and reduced need for data entry resources and administrative support, as well as improving the overall quality and timeliness of the crash data.

Local Agency Crash Data Support

The Upper Great Plains Transportation Institute develops crash data summaries for each law enforcement agency under contract with the TSO for overtime enforcement supporting impaired driving and seat belt enforcement campaigns. The crash data summaries demonstrate the priority crash factors and trends within each local agency's jurisdiction.

Annual Crash Summary

The NDDOT annually publishes the Crash Summary to identify and describe the annual crash data and historical crash trends in North Dakota, including the description of factors contributing to the occurrence of traffic crashes and the resulting injuries and fatalities. The Crash Summary is a valuable resource for local agencies and their safety partners for issue identification, safety strategy planning, targeted strategy implementation, program evaluation, and media inquiries. The document is located at:

<http://www.dot.nd.gov/divisions/safety/docs/crash-summary.pdf>

References and Works Cited

- AAA Foundation for Traffic Safety (AAA), 2012. *2012 Traffic Safety Culture Index*. Washington DC. January.
- Dahlberg, Linda L., and Etienne G. Krug, 2002. "Chapter 1. Violence-a Global Public Health Problem." *World Report on Violence and Health*. Edited by Etienne G. Krug, Linda L. Dahlberg, James A. Mercy, Anthony B. Zwi, and Rafael Lozano. World Health Organization: Geneva, Switzerland.
- Keating, Daniel P., 2007. "Understanding Adolescent Development: Implications for Driving Safety." *Journal of Safety Research*. Vol. 38, Issue 2. Pages 147-157.
- Lerner, Neil, Jeremiah Singer, and James Jenness, 2010. "Safer Drivers." White Papers for: *Toward Zero Deaths: A National Strategy on Highway Safety*. White Paper No. 3. American Association of State Highway and Transportation Officials (AASHTO) and National Cooperative Highway Research Program (NCHRP): Washington, DC. July 12.
- National Highway Traffic Safety Administration (NHTSA), 2014. *Traffic Safety Facts, 2012: Occupant Protection*. Report No. DOT HS 811 892. National Center for Statistics and Analysis: Washington, DC. March.
- National Highway Traffic Safety Administration (NHTSA), 2013. *Countermeasures that Work: A Highway Safety Countermeasure Guide for State Highway Safety Offices*. 7th Edition. Report No. DOT HS 811 727. Washington, DC. April.
- National Highway Traffic Safety Administration (NHTSA), 2012a. *Traffic Safety Facts 2010: A Compilation of Motor Vehicle Crash Data from the Fatality Analysis Reporting System and the General Estimates System*. Report No. DOT HS 811 659. Washington, DC.
- National Highway Traffic Safety Administration (NHTSA), 2012b. *Traffic Safety Facts, 2010 Data: Young Drivers*. Report No. DOT HS 811 622. National Center for Statistics and Analysis: Washington, DC. May.
- National Highway Traffic Safety Administration (NHTSA), 2012c. *Traffic Safety Facts, 2010 Data: Speeding*. Report No. DOT HS 811 636. National Center for Statistics and Analysis: Washington, DC. August.
- National Highway Traffic Safety Administration (NHTSA), 2009. *Traffic Safety Facts, 2008 Data: Occupant Protection*. Report No. DOT HS 811 160. National Center for Statistics and Analysis: Washington, DC.
- National Highway Traffic Safety Administration (NHTSA), 2008. *How States Achieve High Seat Belt Use Rates*. Report No. DOT HS 810 962. Washington, DC. August.
- National Highway Traffic Safety Administration (NHTSA), 2007. *Screening and Brief Intervention Tool Kit for College and University Campuses*, Report No. DOT HS 810 751. Washington, DC. February.
- National Highway Traffic Safety Administration (NHTSA), 2001. *Effectiveness of Occupant Protection Systems and Their Use*. Fifth/Sixth Report to Congress. Report No. DOT HS 809 442. Washington, DC. November.

- Shults, Ruth A., and Laurie F. Beck, 2012. "Self-reported seatbelt use, United States, 2002-2010: Does prevalence vary by state and type of seatbelt law?" *Journal of Safety Research*. Vol. 43, Issues 5-6. Pages 417-420. December.
- Sprattler, Karen, 2010. *Minnesota Safe Ride Program Report*. Center for Transportation Studies, University of Minnesota. March.
- Ward, Nicholas J., Jeff Linkenback, Sarah N. Keller, and Jay Otto, 2010. "White Paper on Traffic Safety Culture." White Papers for: *Toward Zero Deaths: A National Strategy on Highway Safety*. White Paper No. 2. American Association of State Highway and Transportation Officials (AASHTO) and National Cooperative Highway Research Program (NCHRP): Washington, DC. July 7.
- Williams, Allan F., 2007. *Public Information and Education in the Promotion of Highway Safety*. Research Results Digest 322. National Cooperative Highway Research Program (NCHRP): Washington, DC. August.

23 USC 409
NDDOT Reserves All Objections

APPENDIX

US Supreme Court Validation of 23 U.S.C. § 409

23 U.S.C. § 409 : US Code - Section 409: Discovery and admission as evidence of certain reports and surveys

Notwithstanding any other provision of law, reports, surveys, schedules, lists, or data compiled or collected for the purpose of identifying, evaluating, or planning the safety enhancement of potential accident sites, hazardous roadway conditions, or railway-highway crossings, pursuant to sections 130, 144, and 148 of this title or for the purpose of developing any highway safety construction improvement project which may be implemented utilizing Federal-aid highway funds shall not be subject to discovery or admitted into evidence in a Federal or State court proceeding or considered for other purposes in any action for damages arising from any occurrence at a location mentioned or addressed in such reports, surveys, schedules, lists, or data

Pierce County, Washington v. Guillen

Supreme Court of the United States, 2003

123 U.S. 720

Brief Fact Summary

The Court addressed whether 23 U.S.C. section 409, which protects information "compiled or collected" in connection with certain federal highway safety programs from being discovered or admitted in certain federal or state trials, is a valid exercise of Congress's authority under the Constitution.

Rule of Law and Holding

This Court lacks jurisdiction to hear the tort portion of the case but has jurisdiction to hear the Public Disclosure Act portion. Certain state-court judgments can be treated as final for jurisdictional purposes even though further proceedings are to take place in the state courts.

Edited Opinion

Note: The following opinion was edited by CVN Law School staff. © 2008 Courtroom Connect, Inc.

JUSTICE THOMAS delivered the opinion of the Court.

We address in this case whether 23 U. S. C. § 409, which protects information "compiled or collected" in connection with certain federal highway safety programs from being discovered or admitted in certain federal or state trials, is a valid exercise of Congress' authority under the Constitution.

Beginning with the Highway Safety Act of 1966, Congress has endeavored to improve the safety of our Nation's highways by encouraging closer federal and state cooperation with respect to road improvement projects. To that end, Congress has adopted several programs to assist the States in identifying highways in need of improvements and in funding those improvements. Of relevance to this case is the Hazard Elimination Program (Program) which provides state and local governments with funding to improve the most dangerous sections of their roads. To be eligible for funds under the Program, a state or local government must undertake a thorough evaluation of its public roads. Specifically, § 152(a)(1) requires them to "conduct and systematically maintain an engineering survey of all public roads to identify hazardous locations, sections, and elements, including roadside obstacles and unmarked or poorly marked roads, which may constitute a danger to motorists, bicyclists, and pedestrians, assign priorities for the correction of such

locations, sections, and elements, and establish and implement a schedule of projects for their improvement."

Not long after the adoption of the Program, the Secretary of Transportation reported to Congress that the States objected to the absence of any confidentiality with respect to their compliance measures. According to the Secretary's report, the States feared that diligent efforts to identify roads eligible for aid under the Program would increase the risk of liability for accidents that took place at hazardous locations before improvements could be made. In 1983, concerned that the States' reluctance to be forthcoming and thorough in their data collection efforts undermined the Program's effectiveness, the United States Department of Transportation (DOT) recommended the adoption of legislation prohibiting the disclosure of information compiled in connection with the Program.

To address the concerns expressed by the States and the DOT, in 1987, Congress adopted 23 U. S. C. § 409, which provided: "Notwithstanding any other provision of law, reports, surveys, schedules, lists, or data compiled for the purpose of identifying[,] evaluating, or planning the safety enhancement of potential accident sites, hazardous roadway conditions, or railway-highway crossings, pursuant to sections 130, 144, and 152 of this title or for the purpose of developing any highway safety construction improvement project which may be implemented utilizing Federal-aid highway funds shall not be admitted into evidence in Federal or State court or considered for other purposes in any action for damages arising from any occurrence at a location mentioned or addressed in such reports, surveys, schedules, lists, or data."

The proper scope of § 409 became the subject of some dispute among the lower courts. Some state courts, for example, concluded that § 409 addressed only the admissibility of relevant documents at trial and did not apply to pretrial discovery. According to these courts, although information compiled for § 152 purposes would be inadmissible at trial, it nevertheless remained subject to discovery. Other state courts reasoned that § 409 protected only materials actually generated by a governmental agency for § 152 purposes, and documents collected by that agency to prepare its § 152 funding application remained both admissible and discoverable.

As amended, § 409 now reads:

"Notwithstanding any other provision of law, reports, surveys, schedules, lists, or data compiled or collected for the purpose of identifying, evaluating, or planning the safety enhancement of potential accident sites, hazardous roadway conditions, or railway-highway crossings, pursuant to sections 130, 144, and 152 of this title or for the purpose of developing any highway safety construction improvement project which may be implemented utilizing Federal-aid highway funds shall not be subject to discovery or admitted into evidence in a Federal or State court proceeding or considered for other purposes in any action for damages arising from any occurrence at a location mentioned or addressed in such reports, surveys, schedules, lists, or data."

Ignacio Guillen's wife, Clementina Guillen-Alejandre, died on July 5, 1996, in an automobile accident at the intersection of 168th Street East and B Street East (168/B intersection), in Pierce County, Washington. Several months before the accident, petitioner had requested § 152 funding for this intersection, but the request had been denied. Petitioner renewed its application for funding on April 3, 1996, and the second request was approved on July 26, 1996, only three weeks after the accident occurred.

Beginning on August 16, 1996, counsel for respondents sought to obtain from petitioner information about accidents that had occurred at the 168/B intersection.¹ Petitioner declined to provide any responsive information, asserting that any relevant documents were protected by § 409. After informal efforts failed to resolve this discovery dispute, respondents turned to the Washington courts.

While the appeal in the PDA action was pending, respondents filed a separate action, asserting that petitioner had been negligent in failing to install proper traffic controls at the 168/B intersection. In connection with the tort action, respondents served petitioner with interrogatories seeking information regarding accidents that had occurred at the 168/B intersection. Petitioner refused to comply with the discovery request, once again relying on § 409. Respondents successfully sought an order to compel, and petitioner moved for discretionary appellate review of the trial judge's interlocutory order.

Having determined that § 409 protects only information compiled or collected for § 152 purposes, and does not protect information compiled or collected for purposes unrelated to § 152, as held by the agencies that compiled or collected that information, we now consider whether § 409 is a proper exercise of Congress' authority under the Constitution. We conclude that it is.

It is well established that the Commerce Clause gives Congress authority to "regulate the use of the channels of interstate commerce." In addition, under the Commerce Clause, Congress "is empowered to regulate and protect the instrumentalities of interstate commerce, or persons or things in interstate commerce, even though the threat may come only from intrastate activities." As already discussed, Congress adopted § 152 to assist state and local governments in reducing hazardous conditions in the Nation's channels of commerce. That effort was impeded, however, by the States' reluctance to comply fully with the requirements of § 152, as such compliance would make state and local governments easier targets for negligence actions by providing would-be plaintiffs a centralized location from which they could obtain much of the evidence necessary for such actions. In view of these circumstances, Congress could reasonably believe that adopting a measure eliminating an unforeseen side effect of the information-gathering requirement of § 152 would result in more diligent efforts to collect the relevant information, more candid discussions of hazardous locations, better informed decisionmaking, and, ultimately, greater safety on our Nation's roads.

Consequently, both the original § 409 and the 1995 amendment can be viewed as legislation aimed at improving safety in the channels of commerce and increasing protection for the instrumentalities of interstate commerce. As such, they fall within Congress' Commerce Clause power. Accordingly, the judgment of the Washington Supreme Court is reversed, and the case is remanded for further proceedings not inconsistent with this opinion.

It is so ordered.